

MAESTRO 3.0

PROFESSIONAL ARCHITECTURAL LIGHTING

02 NEWS **2021/2022**

i-LèD

02NEWS**2021/2002**

PROFESSIONAL ARCHITECTURAL LIGHTING

linealightgroup

HOW TO READ PRODUCTS

Vos_R | Downlight | powerLED 1,5 W 500 mA

Family Name | Chapter | L.E.D. Type | Power | Electronics Characteristic



Pictograms
How to read symbols see Page 46

Light emission

Image of the product with relative technical dimension drawing plus information on the hole to be drilled on the ceiling

Finish | Product code | Internal equipment | Colour Rendering Index

	CRI 92	CRI 92 HC	CRI 80	CRI 80 HC
White	**90638**	90646	90416	90644
Black	90639	90647	90417	90645

Cct		lm-S - D CRI 92	lm-S - D CRI 80
M	2700	395 - 163	490 - 202
W	3000	423 - 174	490 - 202
N	4000	456 - 188	529 - 218

Code and Colour temperature | **lm-S** Lumen Source | **lm-D** Lumen Delivery

Optic		
15	Spot	(15°)
30	Flood	(29°)
60	Wide Flood	(50°)

Code Optics | Angle of opening of the light beam

The effective flux **(lm-D)** is detected, taking as a reference the Flood optics and a neutral colour finish. For more in-depth details, please consult the technical data sheets on the website: **linealight.com**

How to configure a product: guide to the composition of the finished code

90638 + M + 60 = 90638M60

1st product code | 2nd temperature code | 3rd optics code | Composed finished code

Code Electronics | Electronic and dimensional information | Code composition for converter

89145	**99375**	**99708**	**99711**	
ON/OFF 1 art. p 138 x l 22 x h 21	ON/OFF 2 - 3 art. p 138 x l 22 x h 21	0/1-10V converter 1 art. p 138 x l 22 x h 21	DALI converter 1 art. p 138 x l 22 x h 21	**+ driver 24V DC** **99374** 75W **99331** 150W

Recessed casing Pag. 21

99847 H. 28 - Ø. 41

Recessed casing code | Recessed casing dimensional

Vos_R | Downlight | powerLED 1,5 W DC 500 mA





	CRI 92	CRI 80
White	90622	90408
Black	90623	90409

Cct	lm S - D CRI 92	lm S - D CRI 80	Optic
M 2700	134 - 79	187 - 104	20 Spot (23°)
W 3000	153 - 85	199 - 110	35 Flood (34°)
N 4000	-	213 - 118	

Electronics

99195	89146	99377	99709	99712	
ON/OFF 1 - 2 art. p 136 x l 22 x h 21	ON/OFF 2 - 3 art. p 138 x l 32 x h 21	ON/OFF 3 - 6 art. p 136 x l 22 x h 21	24V DC converter 0/1-10V 1 art. p 138 x l 22 x h 21	24V DC converter DALI 1 art. p 138 x l 22 x h 21	+ driver 24V DC 99374 75W 99331 150W

Vos_R | Downlight | powerLED 2 W DC 630 mA





	CRI 92	CRI 92 HC	CRI 80	CRI 80 HC
White	90626	90634	90412	90632
Black	90627	90635	90413	90633

Cct	lm S - D CRI 92	lm S - D CRI 80	Optic
M 2700	157 - 69	219 - 96	15 Spot (21°)
W 3000	179 - 78	233 - 102	30 Flood (26°)
N 4000	-	249 - 109	60 W.Flood (52°)

Electronics

89147	99376	99105	99710	99713	
ON/OFF 1 - 2 art. p 138 x l 22 x h 21	ON/OFF 3 - 6 art. p 138 x l 22 x h 21	ON/OFF 6 - 12 art. p 103 x l 38 x h 27	24V DC converter 0/1-10V 1 art. p 136 x l 22 x h 21	24V DC converter DALI 1 art. p 138 x l 22 x h 21	+ driver 24V DC 99374 75W 99331 150W

Recessed casing Pag. 21

99847 H. 28 - Ø. 41

Vos_R | Downlight | powerLED 4 W DC 350 mA





	CRI 92	CRI 92 HC	CRI 80	CRI 80 HC
White	90638	90646	90416	90644
Black	90639	90647	90417	90645

Cct	lm S - D CRI 92	lm S - D CRI 80	Optic
M 2700	395 - 163	490 - 202	15 Spot (15°)
W 3000	423 - 174	490 - 202	30 Flood (29°)
N 4000	456 - 188	529 - 218	60 W.Flood (50°)

Electronics


89145	99375	99708	99711	
ON/OFF 1 art. p 136 x l 22 x h 21	ON/OFF 2 - 3 art. p 138 x l 22 x h 21	0/1-10V converter 1 art. p 136 x l 22 x h 21	DALI converter 1 art. p 138 x l 22 x h 21	+ driver 24V DC 99374 75W 99331 150W

Recessed casing Pag. 21

99847 H. 28 - Ø. 41

Vos_R | Downlight | powerLED 6 W DC 500 mA





	CRI 92	CRI 92 HC	CRI 80	CRI 80 HC
White	90650	90658	90420	90656
Black	90651	90659	90421	90657

Cct	lm S - D CRI 92	lm S - D CRI 80	Optic
M 2700	532 - 231	659 - 287	15 Spot (15°)
W 3000	569 - 248	659 - 287	30 Flood (30°)
N 4000	614 - 267	711 - 309	60 W.Flood (50°)

Electronics

99377	99106	99714	99715
ON/OFF 1 art. p 136 x l 22 x h 21	ON/OFF 2-3 art. p 160 x l 58 x h 27	0/1-10V 1 art. p 138 x l 22 x h 21	DALI 1 art. p 136 x l 22 x h 21

Recessed casing Pag. 21

99848 H. 28 - Ø. 41

RTC **90650W30 / 90650W60 / 90420W30 / 90420W60**





02NEWS**2021/2022** range index

Uplights & inground lamps

Alcor_R — new —  — 24

Alcor_Q — new —  — 25

Suelo_RX Pro — new —  — 28

Beret_2R — new —  — 35

Beret_2Q — new —  — 35

Wall path markers


Quara_R —  — 38

Quara_Q —  — 38

Step —  — 41

Accent lighting

Clivo_2 — new —  — 43

Shaker — new —  — 47

Periskop — new —  — 49




LIGHT UP NEW IDEAS!




WE HAVE CONQUERED SPACE...



Scale 1:1

BY FITTING
ALL THE i-LèD
TECHNOLOGY
IN THE PALM OF
YOUR HAND.



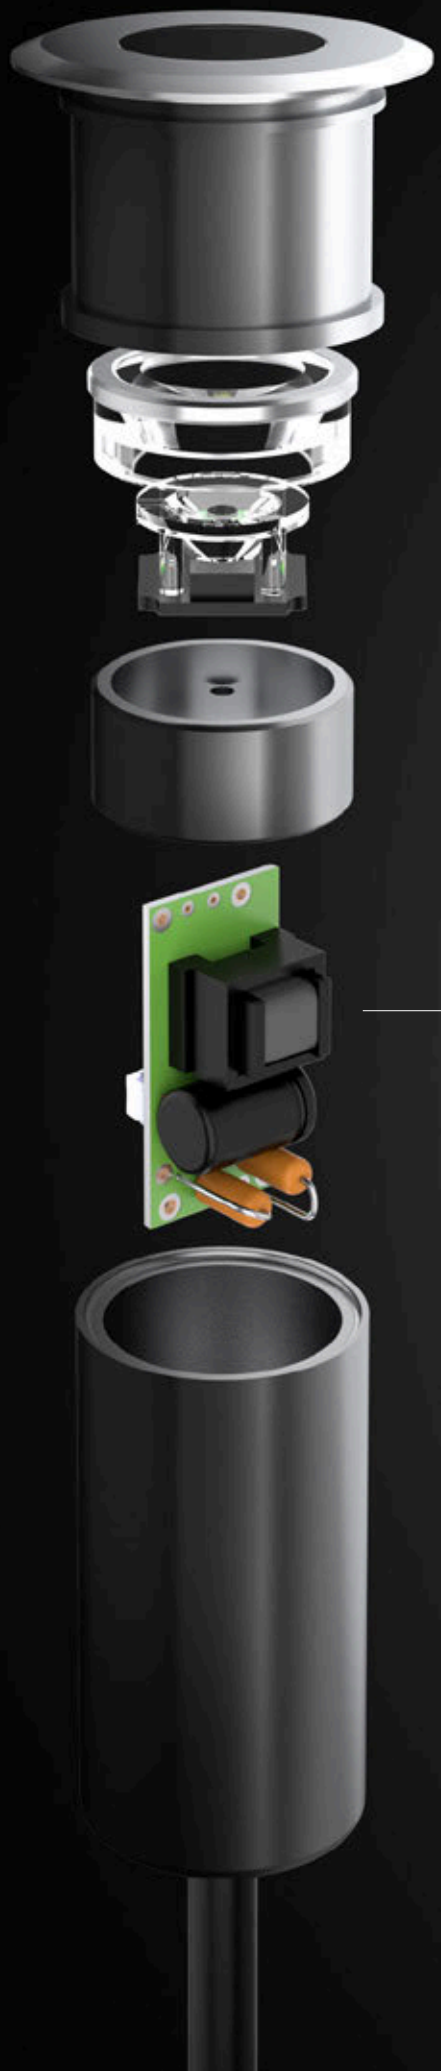

Suelo
Step
Quara
Beret
Clivo
Shaker
Periskop
Alcor

NOW THE DRIVER IS **ON BOARD!**



Scale 1:1

Linea Light Group has created the first minispots with built-in driver. We have studied and created luminaires that, despite being able to fit in the palm of your hand, maintain the performance expected from our products. The new minispots do not require the use of remote power supplies during installation. They are carefully designed and contain the best, and smallest, technology available. The built-in driver, integrated in the body of the luminaire, can be switched to different configurations, such as Up-Light, Path-Markers and Accent Lighting. The new luminaires are extremely compact and have a steel body ideal for outdoor installation thanks to a high protection rating (IP67). Linea Light Group has provided professionals with different fixtures suitable for different uses, even the most demanding. Easy, fast and well-made are the three qualities that define the new technological frontier reached by Linea Light Group.

STANDARD SPOT + DRIVER INSTALLATION



Scale 1:1

NEW SPOT WITH BUILT-IN DRIVER

With its innovations, Linea Light Group has simplified, and speeded up, the work of professionals and installers. We have designed compact, essential and high-performance luminaires which, thanks to the complete integration of the driver into the body of the luminaire, eliminate the need for external power supplies. We have concentrated the best electronic technology and the best performance in just a few centimetres.




Scale 1:1




SYSTEM INSTALLATION, MANAGEMENT AND INTEGRATION: IT ALL BECOMES EASIER

Easy and quick installation are the advantages of our new luminaires. Each assembly and design phase is simplified and speeded up thanks to the built-in driver. The big news is the size: for the first time, the driver has been built into ultra-compact luminaires. This solution makes it easier to design and implement lighting systems, even in complex or sensitive contexts. The new built-in driver system allows for much longer light lines to be installed, compared to the use of remote drivers. The lack of voltage drops is the greatest advantage of the new luminaires. If a single spot is not working properly or goes out, the line remains fully active and when the faulty luminaire is replaced the perfect continuity of the system is restored. Another advantage is the fact that it can be easily integrated into an existing system. Each luminaire can be managed independently of the main power supply. Fast and well-made is the new Linea Light group operating paradigm. The technological innovation includes eight product families: Alcor, Suelo, Beret, Quara, Step, Clivo, Shaker and Periskop. All designed for specific installations and with high performance qualities. Up-Light, Path-Markers or Accent Lighting: each configuration is easy to install and maintain.

If a remote driver fails, the entire system goes out.

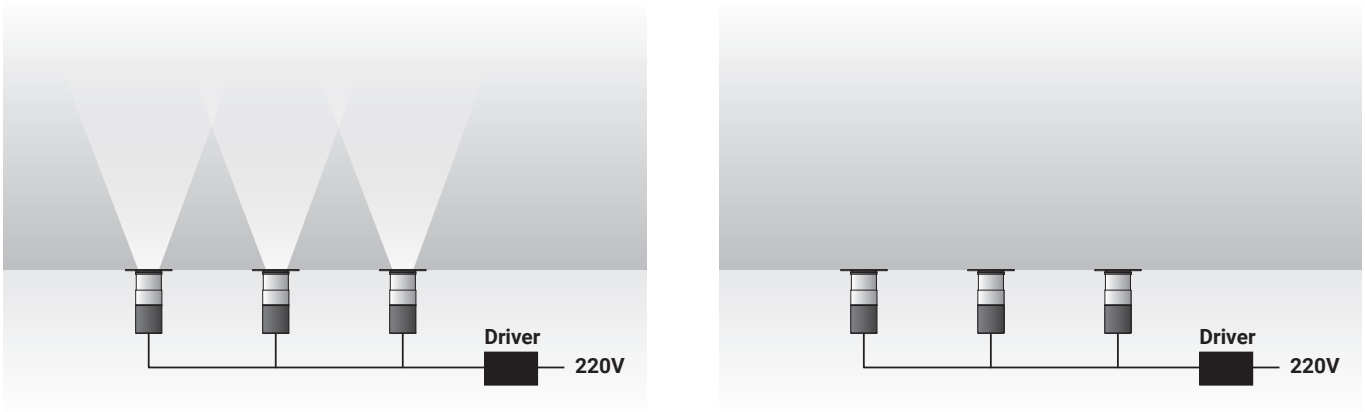


When the driver is built into the product, the lighting system keeps working even in the event of a fault. By replacing the single luminaire, the system will be fully operational again.

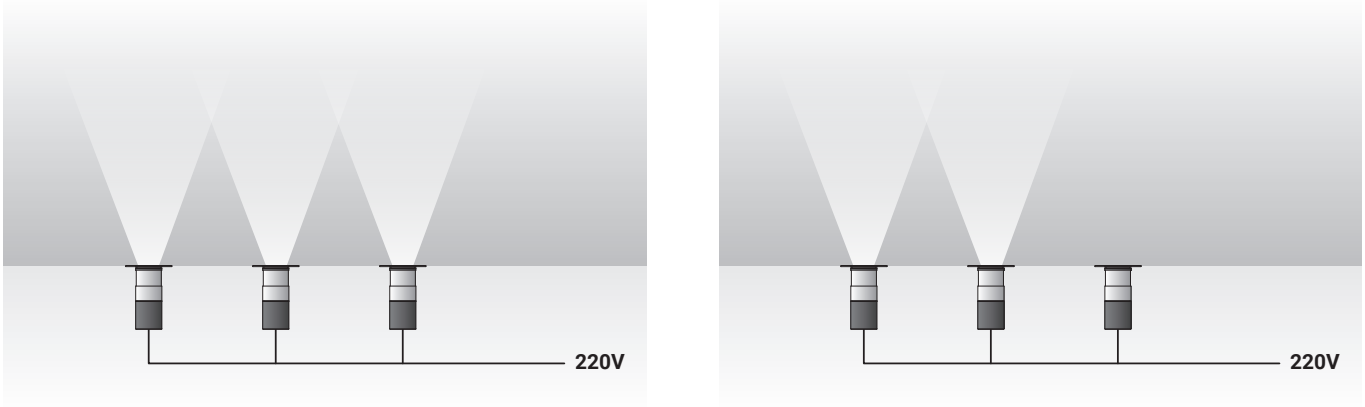

MAXIMUM DESIGN VERSATILITY

The new Linea Light Group spots with built-in driver are easy to install, making it possible to operate easily and quickly even in complex contexts such as historical-artistic ones. In terms of installation, everything is extremely easy. There is no longer need for a junction box to contain all the system's power supply units. In delicate and architecturally valuable contexts this is a decisive factor, since, in many cases, it is not possible to built a complex system like those found in new buildings. The new luminaires with built-in driver are ideal for accent lighting or to gently highlight architecturally important details.
An important advantage is the possibility to create very long light lines. The design and wiring of the system becomes easier and faster, reducing connection and maintenance time and costs. Two important factors that make our products competitive, without compromising on performance and efficiency.

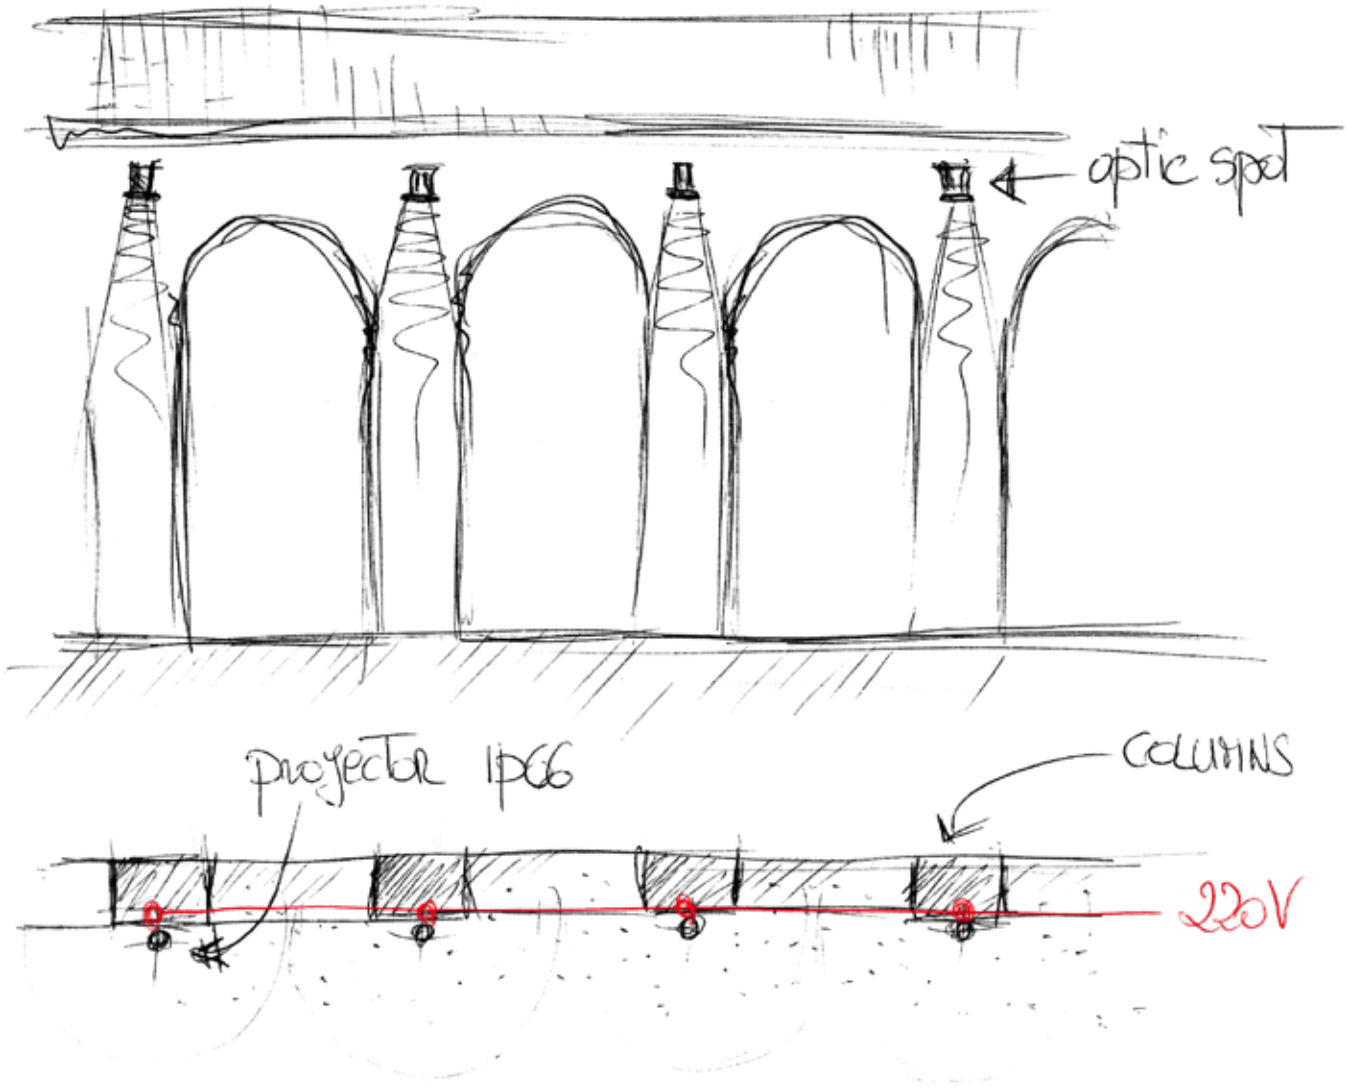



ALCOR
INTEGRATED DRIVER




Scale 1:1


SPECTACULAR LIGHTS TO MARK A PATH

Alcor is a range of extremely compact recessed marker lights, with an IP67 protection rating. The power supply is built into the structure, so they can be connected directly to the power line, making installation easier. The body is made of AISI 316 L steel and they have a load capacity of up to 2000 kg. They are available in two shapes, round or square, with a 180° window, narrow window, 2 windows or 4 windows, which allow you to mark a path with fascinating lighting effects.


Alcor_Q lighting effect

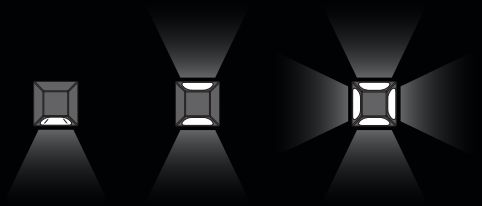


Alcor_R lighting effect

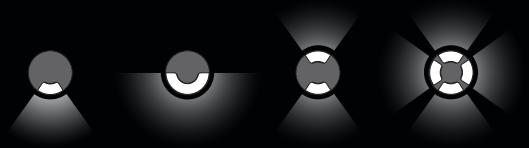

Alcor_R | Drive-over spotlights | 198-264 V AC | powerLED 1,6 W DC - 3 W AC









		Cct	lm S - D	Optic
Steel	**83558**	**M** 2700	233 - 36	**18** General -
		W 3000	249 - 39	
		N 4000	266 - 42	

Recessed casing Pag. 25

Alcor_R1 | Drive-over spotlights | 198-264 V AC | powerLED 1,6 W DC - 3 W AC









		Cct	lm S - D	Optic
Steel	**83559**	**M** 2700	233 - 13	**18** General -
		W 3000	249 - 14	
		N 4000	266 - 15	

Recessed casing Pag. 25

Alcor_R2 | Drive-over spotlights | 198-264 V AC | powerLED 1,6 W DC - 3 W AC









		Cct	lm S - D	Optic
Steel	**83560**	**M** 2700	233 - 26	**18** General -
		W 3000	249 - 28	
		N 4000	266 - 30	

Recessed casing Pag. 25

Alcor_R4 | Drive-over spotlights | 198-264 V AC | powerLED 1,6 W DC - 3 W AC








		Cct	lm S - D	Optic
Steel	**83561**	**M** 2700	233 - 52	**18** General -
		W 3000	249 - 56	
		N 4000	266 - 60	

Recessed casing Pag. 25


Photometric curves of:

Alcor_R
3W (83558)




C0/C180 C90/C270
Optic 18 General

Alcor_R1
3W (83559)




C0/C180 C90/C270
Optic 18 General

Alcor_R2
3W (83560)



C0/C180 C90/C270
Optic 18 General

Alcor_R4
3W (83561)



C0/C180 C90/C270
Optic 18 General

Alcor_Q1 | Drive-over spotlights | 198-264 V AC | powerLED 1,6 W DC - 3 W AC



	Cct	lm S - D	Optic
Steel **83562**	**M** 2700	233 - 19	**18** General -
	W 3000	249 - 21	
	N 4000	266 - 22	

Recessed casing Pag. 25

Alcor_Q2 | Drive-over spotlights | 198-264 V AC | powerLED 1,6 W DC - 3 W AC



	Cct	lm S - D	Optic
Steel **83563**	**M** 2700	233 - 39	**18** General -
	W 3000	249 - 42	
	N 4000	266 - 45	

Recessed casing Pag. 25

Alcor_Q4 | Drive-over spotlights | 198-264 V AC | powerLED 1,6 W DC - 3 W AC




	Cct	lm S - D	Optic
Steel **83564**	**M** 2700	233 - 78	**18** General -
	W 3000	249 - 84	
	N 4000	266 - 90	

Recessed casing Pag. 25


Photometric curves of:

Alcor_Q1
3W (83562)




C0/C180 C90/C270
Optic 18 General

Alcor_Q2
3W (83563)



C0/C180 C90/C270
Optic 18 General

Alcor_Q4
3W (83564)



C0/C180 C90/C270
Optic 18 General

Recessed casing



	description	
84918	Recessed casing	PVC

suitable for: Alcor_R / Alcor_R1 / Alcor_R2
Alcor_R4 / Alcor_Q1 / Alcor_Q2 / Alcor_Q4

SUELO
INTEGRATED DRIVER



Scale 1:1




STRONG AND SAFE IN EVERY SITUATION


SUELO RX Pro is an extremely compact recessed up-light, with an IP67 protection rating. The power supply is built into the structure, so it can be connected directly to the power line, making installation easier.
The body is made of AISI 316 L steel and they have a load capacity of up to 2000 kg.

Performance and control


SUELO RX Pro provides the designer with five types of high performance distribution angles to enhance the different architectural details of a building.

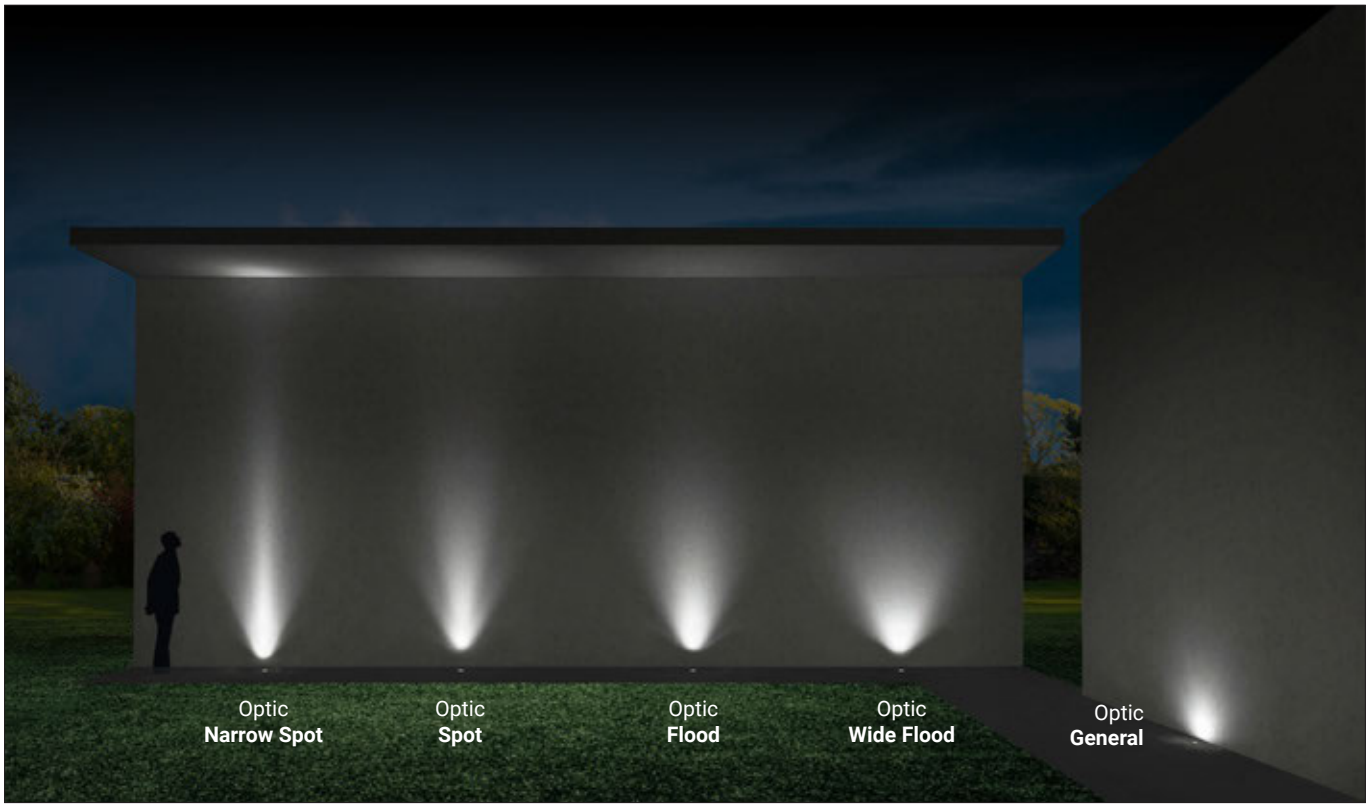

Suelo_RX Pro | Up-Light | 198-264 V AC | powerLED 1,6 W DC - 3 W AC









	Cct	lm S - D	Optic
Steel **83588**	**M** 2700	233 - 131	**08** N.Spot (10°)
	W 3000	249 - 149	**15** Spot (21°)
	N 4000	266 - 159	**30** Flood (26°)
			60 W.Flood (57°)
			00 General (104°)

Recessed casing Pag. 28


Photometric curves of Suelo_RX Pro 3W (83588)




C0/C180 C90/C270
Optic 08 Narrow Spot




C0/C180 C90/C270
Optic 15 Spot



C0/C180 C90/C270
Optic 30 Flood



C0/C180 C90/C270
Optic 60 Wide Flood



C0/C180 C90/C270
Optic 00 General


Recessed casing



	description	type
99685	Recessed casing	PVC

suitable for: Suelo_RX Pro



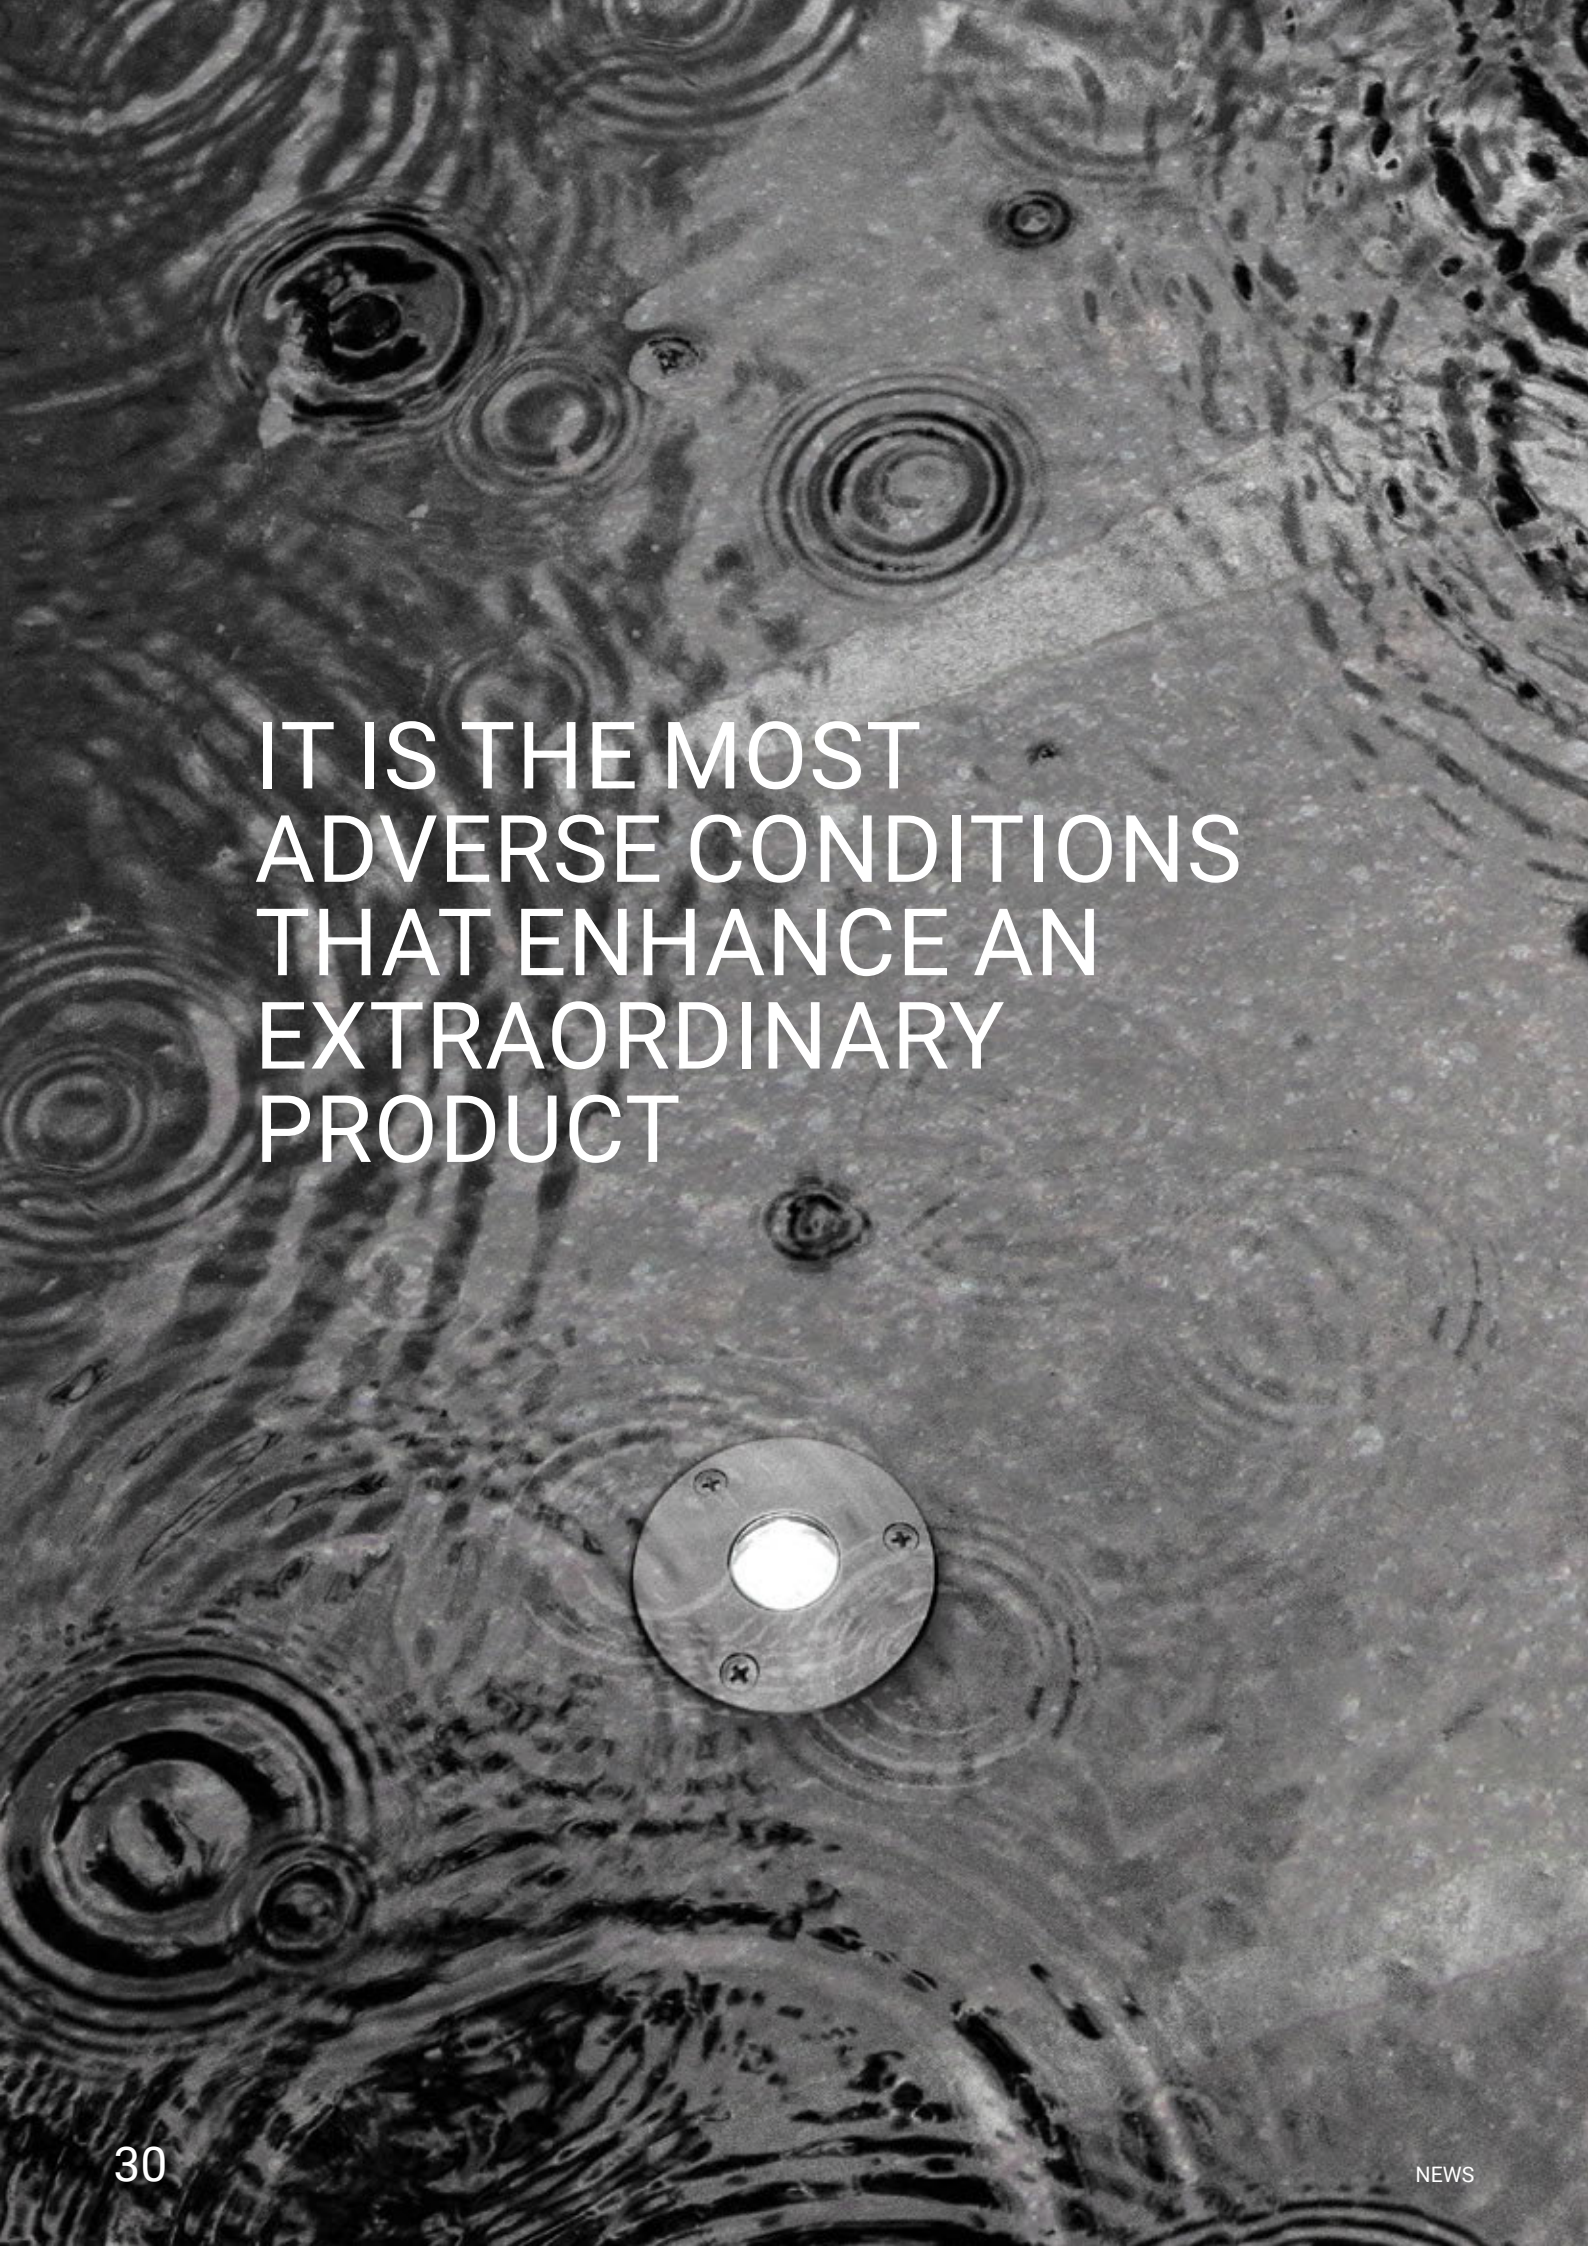

IT IS THE MOST ADVERSE CONDITIONS THAT ENHANCE AN EXTRAORDINARY PRODUCT


Easy installation

The casings designed for SUELO RX Pro simplify the connection of the luminaires to the power line, thus reducing installation time. The screws anchor SUELO RX Pro to the casing structure, guaranteeing safety and solidity.






BERET
INTEGRATED DRIVER

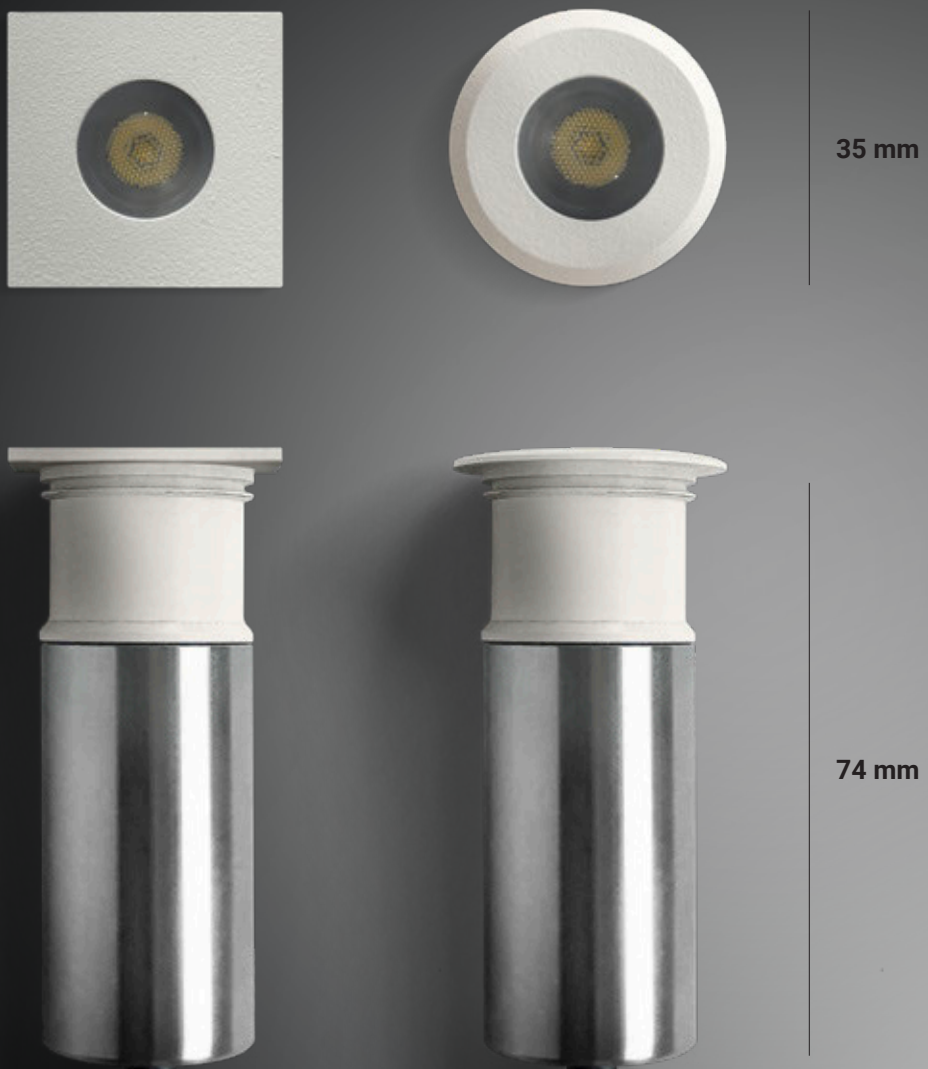

Scale 1:1

ADAPTABLE IN ANY CONTEXT


Beret is an extremely compact recessed up-light, with an IP67 protection rating. The power supply is built into the structure, so it can be connected directly to the power line. It is available in two shapes, round and square, with a flange of just 35mm, and in six different finishes: white, grey, chrome, brushed nickel, AISI 316 L steel and natural brass, to offer unprecedented compositional possibilities and five types of distribution angles.

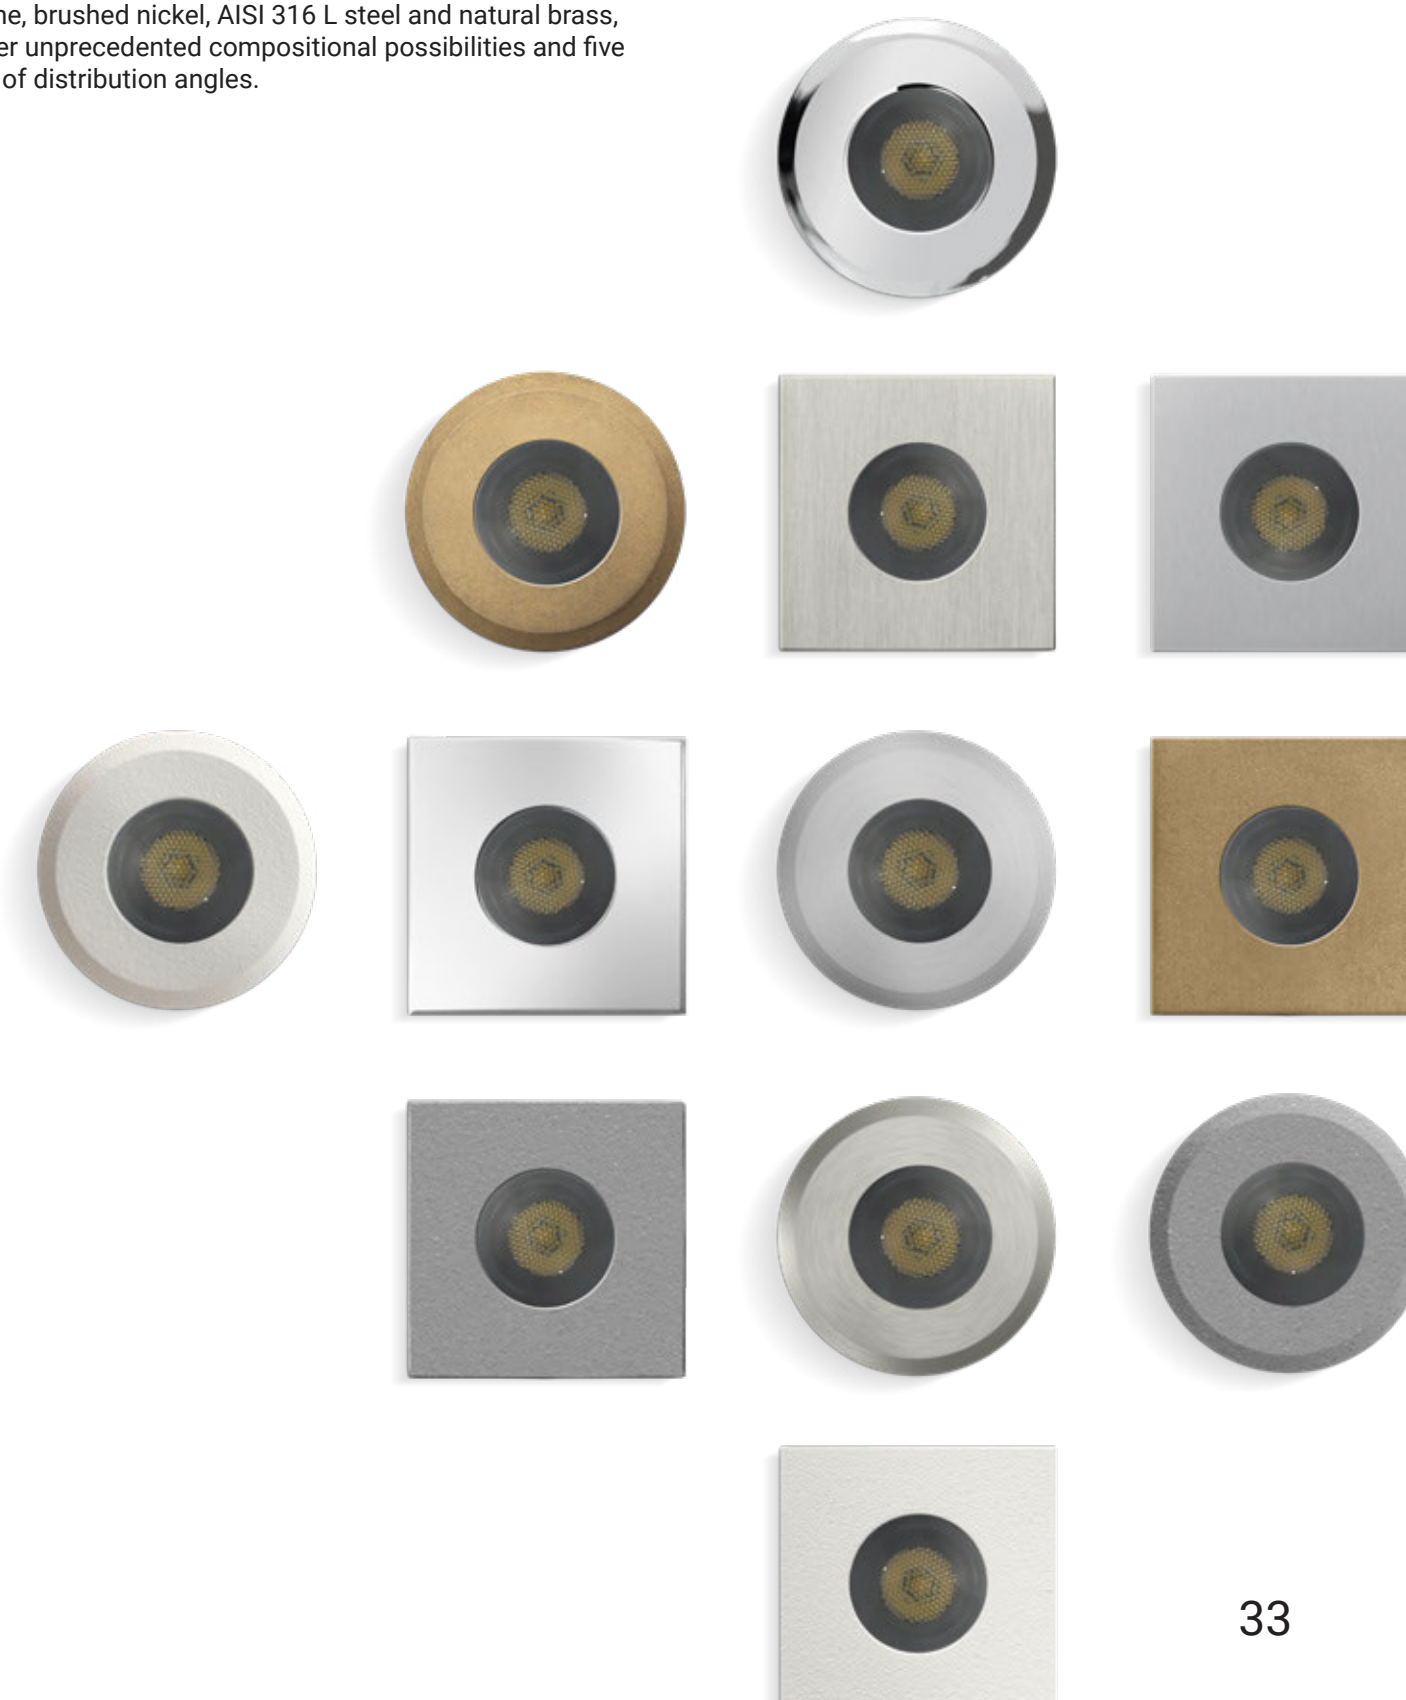




Costa Architetti Headquarter | Catania, Italy

Beret_2R | Walk-over spotlight | 198-264 V AC | powerLED 1,6 W DC - 3 W AC








		Cct	lm S - D	Optic
White	**83568**	**M** 2700	233 - 131	**08** N.Spot (10°)
Grey	**83569**	**W** 3000	249 - 149	**15** Spot (21°)
Chrome	**83565**	**N** 4000	266 - 159	**30** Flood (26°)
Nickel	**83566**			**60** W.Flood (57°)
Steel	**83567**			**00** General (104°)
Brass	**83570**			


"Steel" version: body and flange made of AISI 316 L steel

Recessed casing Pag. 35

Beret_2Q | Walk-over spotlight | 198-264 V AC | powerLED 1,6 W DC - 3 W AC








		Cct	lm S - D	Optic
White	**83708**	**M** 2700	233 - 131	**08** N.Spot (10°)
Grey	**83709**	**W** 3000	249 - 149	**15** Spot (21°)
Chrome	**83705**	**N** 4000	266 - 159	**30** Flood (26°)
Nickel	**83706**			**60** W.Flood (57°)
Steel	**83707**			**00** General (104°)
Brass	**83710**			

"Steel" version: body and flange made of AISI 316 L steel


Recessed casing Pag. 35




Photometric curves of Beret_2R 3W (83568)




C0/C180 C90/C270
Optic 08 Narrow Spot




C0/C180 C90/C270
Optic 15 Spot



C0/C180 C90/C270
Optic 30 Flood



C0/C180 C90/C270
Optic 60 Wide Flood



C0/C180 C90/C270
Optic 00 General

Recessed casing



	description	type
84918	Recessed casing	PVC

suitable for: Beret_2R / Beret_2Q

QUARA
INTEGRATED DRIVER



70 mm



65 mm



42 mm



42 mm

Scale 1:1

COMPACT, COMFORTABLE, SPECTACULAR

A drop of light in a square or round lamp body: Quara, a marker light with an IP65 protection rating which, when installed close to the floor, illuminates and decorates in a classy and tasteful manner thanks to its asymmetrical optics. Suitable to illuminate paths, stairs and steps. Supplied with a power supply built into the luminaire, it is therefore possible to connect Quara directly to the power line.






Quara_R | Path-marker | 176-264 V AC | powerLED 2W DC - 2,7W AC

IP44 · 1 m





		Cct	lm S - D	Optic
Nickel	**83582**	**M** 2700	233 - 79	**70** W.Flood (104°)
		W 3000	249 - 84	
		N 4000	266 - 90	


83582: for indoor use only

Recessed casing Pag. 38

Quara_R | Path-marker | 176-264 V AC | powerLED 2W DC - 2,7W AC

IP65 · 1 m





		Cct	lm S - D	Optic
White	**83579**	**M** 2700	233 - 109	**70** E.W.Flood(104°)
Grey	**83580**	**W** 3000	249 - 116	
DarkBrown	**83581**	**N** 4000	266 - 125	


Recessed casing Pag. 38

RTG **83579W70 / 83580W70 / 83581W70**

Quara_Q | Path-marker | 176-264 V AC | powerLED 2 W DC - 2,7 W AC

IP44 · 1 m





		Cct	lm S - D	Optic
Nickel	**83586**	**M** 2700	233 - 79	**70** W.Flood (104°)
		W 3000	249 - 84	
		N 4000	266 - 90	


83586: for indoor use only

Recessed casing Pag. 38

Quara_Q | Path-marker | 176-264 V AC | powerLED 2 W DC - 2,7 W AC

IP65 · 1 m






		Cct	lm S - D	Optic
White	**83583**	**M** 2700	233 - 109	**70** E.W.Flood(104°)
Grey	**83584**	**W** 3000	249 - 116	
DarkBrown	**83585**	**N** 4000	266 - 125	

Recessed casing Pag. 38

RTG **83583W70 / 83584W70 / 83585W70**


Recessed casing



	description	type
84338	Recessed casing	PVC

suitable for: Quara_R / Quara_Q

Photometric curve of Quara_R 2,7W (83579)



C0/C180 C90/C270

Optic 70 Extra Wide Flood



STEP
INTEGRATED DRIVER



50 mm




40 mm

Scale 1:1


A MARKER LIGHT THAT REVEALS ITSELF

Step revolutionises the idea of marker light, by integrating the power supply into a miniature case, with an IP65 protection rating, and providing an intense and high-performing light. It has a soft asymmetrical emission, thanks to the shallow optical chamber, which emphasises the illuminated parts of the floor. Available in four finishes, chrome, white, grey and dark brown, it can be installed in plasterboard or masonry walls using the special template.

Step66 | Path-marker | 176-264 V AC | powerLED 1 W DC - 1,5 W AC








		Cct	lm S - D	Optic
Chrome	**82745**	**M** 2700	145 - 60	**07** Asymm. -
White	**82746**	**W** 3000	154 - 64	
Grey	**82747**	**N** 4000	165 - 70	
DarkBrown	**82748**			

RTG **82746W07 / 82748W07**


Recessed casing Pag. 41

Photometric curve of Step66 1,5W (82747)



Optic 07 Asymmetric


Recessed casing



	description
99931	Template

suitable for: Step66

CLIVO
INTEGRATED DRIVER

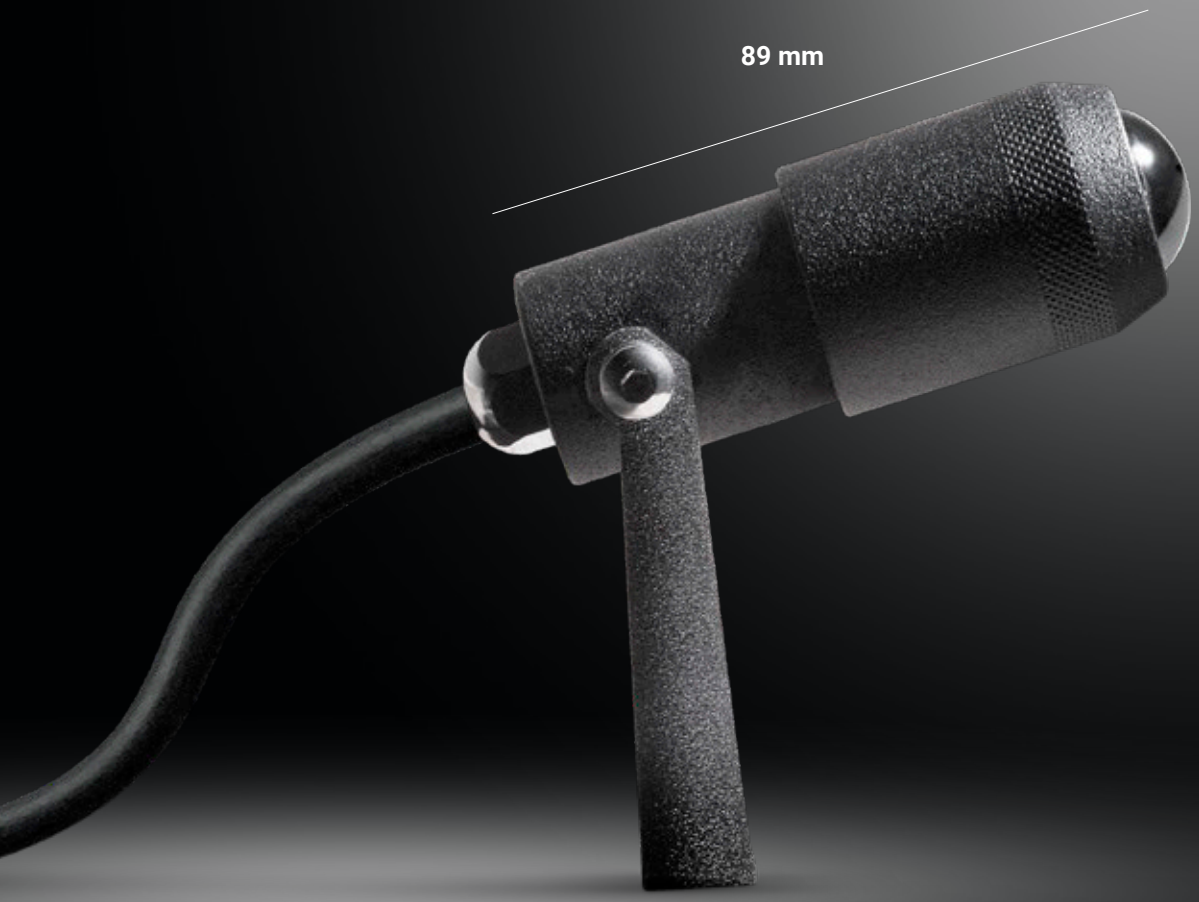


Scale 1:1

Clivo_2 | Accent lighting | 198-264 V AC | powerLED 1,6 W DC - 3 W AC

NEW IP66 1 m






		Cct	lm S - D	Optic
White	**83571**	**M** 2700	233 - 177	**85** 10°- 66°
Black	**83572**	**W** 3000	249 - 188	
Chrome	**83575**	**N** 4000	266 - 200	
Nickel	**83574**			
DarkBrown	**83573**			
Brass	**83576**			
Steel	**83577**			

Steel version: body made of AISI 316 L steel


Accessories Pag. 43

Photometric curves of Clivo_2 3W (83571)



C0/C180 C90/C270

Optic 85 Minimum Narrow Spot



C0/C180 C90/C270

Optic 85 Maximum Wide Flood

Accessories



	description
84890	Steel peg 250 mm

suitable for: Clivo_2

RTG



	description
98112	Steel peg 700 mm

suitable for: Clivo_2

RTG




	description
98513	Anti-glare


suitable for: Clivo_2

RTG

VARIABLE DYNAMIC OPTICS

By turning the built-in ring nut, it is possible to adjust the width of the light beam, from a 10° angle up to a 60° angle.

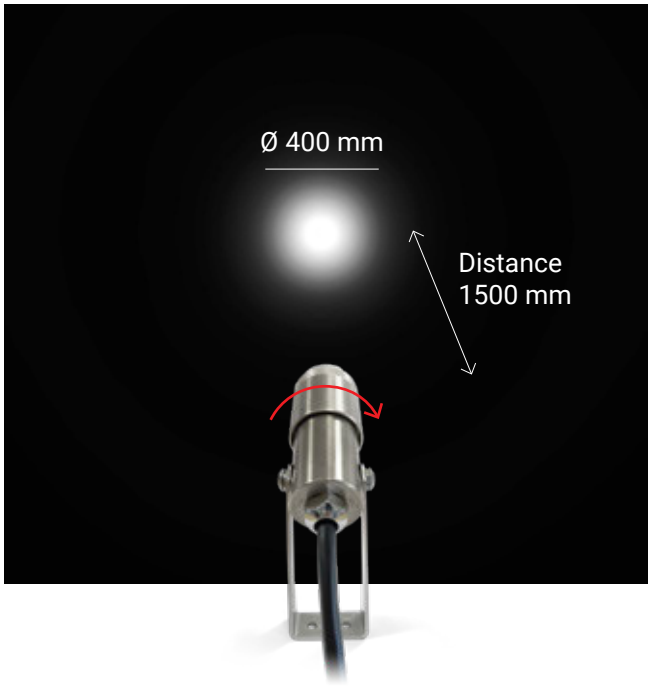

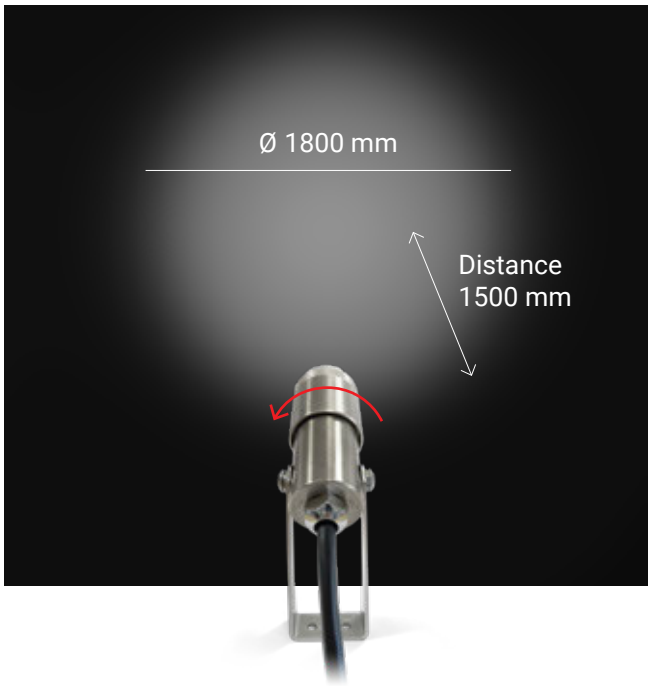

H-FARM | Treviso, Italy




more than 9000 shots in my career.
almost 300 games.
I've been trusted to take the game
winning shot and missed
failed over and over and over again in my life.
And that is why I succeed."
MICHAEL JORDAN

SHAKER
INTEGRATED DRIVER




Scale 1:1

Shaker | Accent lighting | 176-264 V AC | powerLED 2 W DC - 3 W AC

NEW IK10 IP66 1 m






		Cct	lm S - D	Optic
White	**84241**	**M** 2700	233 - 176	**15** Spot (15°)
Black	**84242**	**W** 3000	249 - 189	**30** Flood (30°)
Grey	**84243**	**N** 4000	266 - 202	**60** W.Flood (60°)
DarkBrown	**84244**			
Sand	**84245**			


Accessories Pag. 47

Photometric curves of Shaker 3W (84245)




C0/C180 C90/C270

Optic 15 Spot



C0/C180 C90/C270

Optic 30 Flood



C0/C180 C90/C270

Optic 60 Wide Flood

Accessories

	description
98624	Steel peg 160 mm

suitable for: Shaker



	description
83246	Anti-glare

suitable for: Shaker



	description
98669	Steel peg 101 mm

suitable for: Shaker

PERISKOP
INTEGRATED DRIVER




Scale 1:1

Periskop | Accent lighting | 180-264 V AC | powerLED 6,7 W DC - 8,7 W AC







		Cct	lm S - D	Optic	
White	**84233**	**M** 2700	849 - 632	**15** Spot	(16°)
Black	**84234**	**W** 3000	886 - 660	**30** Flood	(32°)
Grey	**84235**	**N** 4000	935 - 696	**45** Flood	(39°)
DarkBrown	**84236**				


Accessories Pag. 49

Available from January 2022

Periskop Narrow | Accent lighting | 180-264 V AC | powerLED 6 W DC - 7,5 W AC








		Cct	lm S - D	Optic	
White	**84237**	**M** 2700	659 - 468	**10** Spot	(11°)
Black	**84238**	**W** 3000	659 - 468		
Grey	**84239**	**N** 4000	711 - 506		
DarkBrown	**84240**				

Accessories Pag. 49


Available from January 2022

Photometric curves of Periskop 8,7W (84233)




C0/C180 C90/C270

Optic 15 Spot



C0/C180 C90/C270


Optic 30 Flood



C0/C180 C90/C270

Optic 45 Wide Flood

Photometric curve of Periskop Narrow 7,5W (84237)




C0/C180 C90/C270

Optic 15 Spot

Accessories

	description
98624	Steel peg 160 mm

suitable for: Periskop / Periskop Narrow



	description
83245	Anti-glare screen

suitable for: Periskop



	description
89371	Peg

suitable for: Periskop / Periskop Narrow


how to read symbols & suffixes

- Indoor installation
- Outdoor installation
- Wall mounting
- Ground mounting
- Ceiling mounting
- Wall or ground mounting
- Ceiling or wall mounting
- Ceiling, wall or groung mounting
- Ceiling or ground mounting
- IP-- Protection index (IEC 60529) against foreign bodies and water
- IP68 Product designed to withstand temporary immersions
- IP-- / IP-- Optical compartment protecion index
- IK-- Protection index (IEC 62262) against external mechanical impacts
- Walkable device
- Carriageable device
- Stainless steel
- Article protected by resin
- Circular installation hole
- Square installation hole
- Directional light beam
- Tilting light beam
- EM Emergency version available
- Power supply cable included
- Device suitable to be mounted on furniture
- F Device suitable to be mounted on normally flammable surfaces (EN 60598)
- P Device with built-in thermal protection
- Driver included
- Driver not included
- Class I - IEC protection class
- Class II - IEC protection class
- III Class III - IEC protection class
- T3 Over Voltage Protection
- Smartwave ™
- C.C. Constant Current
- C.V. Constant Voltage
- Dimming with integrated potentiometer
- Simply DIM
- Phase-cut
- 1-10 V
- DALI Digital Addressable Lighting Interface
- DALI 2 Digital Addressable Lighting Interface
- DALI PUSH Digital Addressable Lighting Interface
- DMX 512 DMX 512
- DMX RDM RDM, DMX 512
- Infrared
- Radio frequency remote control
- P.I.R. Sensor
- Power Supply With Safety Transformer
- Independent Power Supply
- 100 Thermally Protected Power Supply
- Reinforced insulation
- UGR Unified Glare Rating
- Motion sensor
- Integrated antenna
- External Antenna
- The power supply does not switch into the installation hole
- PTP DALI PointToPoint DALI Dimmering on single item

All articles belong to energy class A++. The connection diagrams for electronics articles are included in the technical documentation.

_A	Alluminium
_A (Orma)	Round
_AB	Alluminium Blade
_AJ	Alluminium Adjustable
_AL	Alluminium Opaline
_AM	Alluminium Adjustable
_C	Ceiling
_CD	Ceiling Direct
_Cell_C	Cell Ceiling
_Cell_P	Cell Pendant
_CI	Ceiling Internal
_D	Double
_EX	Extactable
_F	Frameless
_FJ	Frameless Adjustable
_FL	Frameless Opaline
_FO	Frameless Concentrica
_I	Inox
_IB	Inox Blade
_IJ	Inox Adjustable
_IL	Inox Opaline
_IM	Inox Moon
_M	Modular
_P	Pendant
_PD	Pendant direct
_PI	Pendant Internal
_PU	Pendant Up
_Q	Square
_QD	Square Double
_QJ	Square Adjustable
_QV	Square vertical
_R	Round
_R PRO	Round Professional
_RD (LV44)	Round Dynamic White
_RDX	Round Double + Screws
_RF	Round Frameless
_RFJ	Round Frameless Adjustable
_RJ	Round Adjustable
_RP (Nautilus)	Round Projectors
_RX	Round Big
_RX (Suelo)	Round + Screws
_RX PRO (Suelo)	Pound + Screws Professional
_RXJ (Suelo)	Round + Screws + Adjstable
_RY	Round Asymmetric
_S	Surface
_T	Track
_W	Wall
_WF	Wall Frameless
_Ww	Wall Washer
_X (Anton)	Big
_X (Paseo)	PowerLED
_Y	Asymmetric


finishes materials




White | RAL 9003 embossed



Grey | RAL 9006 embossed



Satin finish



Primer



Anodised aluminium



Aluminium




Steel




Brushed nickel



Chrome



Anodised Black



Gray Black | RAL 7021 embossed



Black | RAL 9005 embossed


Transparent PMMA



Opaline PMMA




Gold



Rose gold




Brass



Bronze



Brown



Dark brown


Sand



Cement



Anthracite



Burnished

The drawings, the measurements, the materials and the colours in this catalogue are understood to be indicative. In the interest of the clientele, the company reserves the right to modify the models at any time and without any obligation of advance notice.

The indication of the Italian flag in this catalogue is purely indicative. The products could be of origins other than those indicated.

"Linea Light Group" reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information in the catalogue are binding for **"Linea Light Group"**. **"Linea Light Group"** will not be held liable for any illustration, text and/or translation errors. More product characteristics are contained in the relative technical data sheets and instruction sheets. This catalogue is protected by copyright (law 22/04/1941 No. 633 and law 14/12/1942 No. 1485: this prohibits any reproduction, total or even partial).
All values indicated in the catalogue are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Addresses

Linea Light HQ Italy
via della Fornace, 59 z.i.
31023 Castelminio di Resana (TV) - Italy
Phone: +39 0423 7868
Fax: +39 0423 786900
info@linealight.com

Linea Light Milano
via Morimondo, 26 int. 17G
20143 Milano - Italy
Phone: +39 02 36750915
Fax: +39 02 36750915
milano@linealight.com

Linea Light Roma
Via La Spezia, 34
00182 Roma - Italy
Phone: +39 06 68589134
info@linealightroma.com

Linea Light UK
Suite 109 - The Business Design Centre
52 Upper Street - Islington N10QH
London - UK
Phone: +44 0203 6371983
info@linealight-uk.com

Linea Light France
Z.A. Heiden Est, 12 rue des Pays-Bas
68310 Wittelsheim - France
Phone: +33 389 75 52 23
Fax: +33 389 75 59 07
info@linealight.fr

Linea Light Deutschland
Aktienstraße 214
45473 Mülheim Ruhr - Germany
Phone: +49 208 299979-0
Fax: +49 208 299979-10
service@linealight.de

Linea Light USA - Inter Lux
3741 Commerce Drive
Suites 306-308
Baltimore, MD 21227 - USA
Phone: +1 410 381 1497
Fax: +1 410 381 1589
answers@inter-lux.com


Linea Light Russia
Design Center Artplay
Nizhnyaya Syromyatnicheskaya 10/2 enter B,
3rd floor, office 14
105120 Moscow - Russia Federation
Phone: +7 495 639 9941
info@linealight.ru

Linea Light Spain
C/ Longares, 48
28022 Madrid - Spain
Phone: +34 912534773
gestion@linealight.com

Linea Light Singapore
21 Kaki Bukit Place, 5th Fl.
Eunos Techpark Singapore
416199 Singapore
Phone: +65-6908 5758
info.sg@linealight.com

Linea Light GCC
Jumeirah Lake Towers
JBC2 - 35th Floor Cluster V - Dubai - UAE
P.O. Box 125902
Phone: +971 4 4218275
Fax: +971 4 4218274
info@linealight.ae

Linea Light Asia - Pacific
No. 7, Nanyi Huayuan Road, Industry Avenue,
528478 Xiaolan Town, Zhongshan City,
Guangdong Province - China
Phone: +86 760 87618355
info@linealight.com.cn

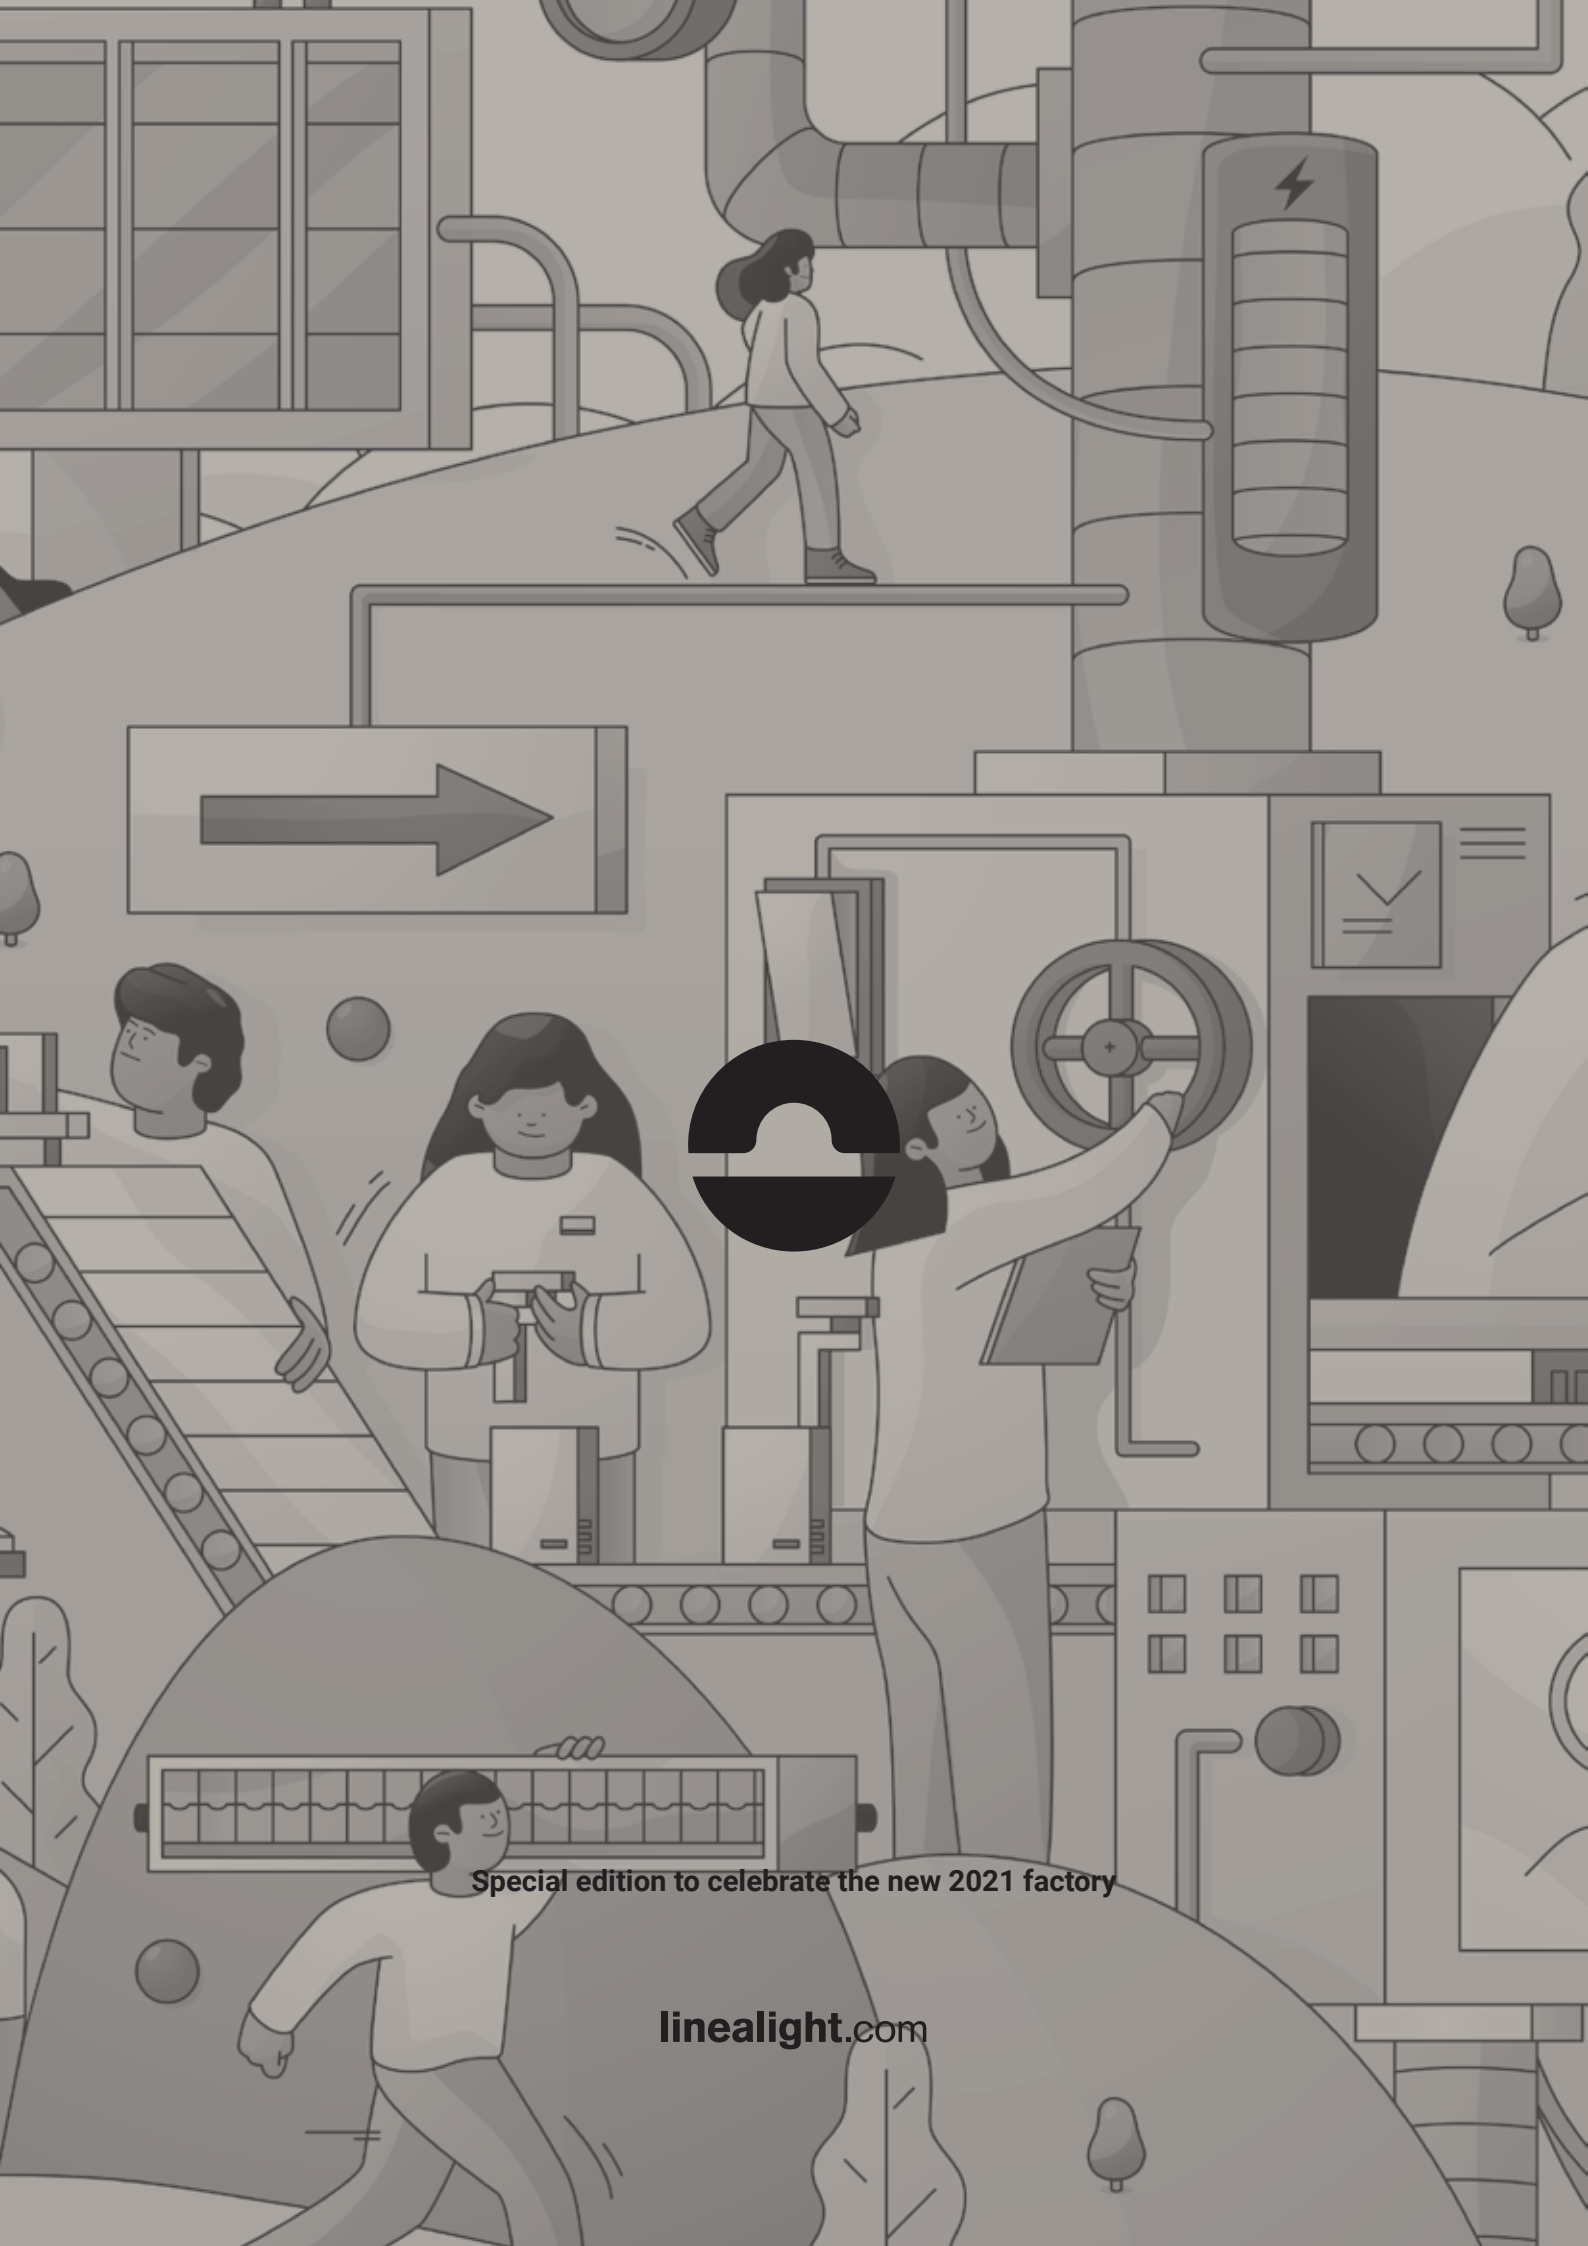

Special edition to celebrate the new 2021 factory

linealight.com