

RUBBER

PROFESSIONAL
ARCHITECTURAL
LIGHTING

REV.**02**
2022

i-LèD

RUBBER

PROFESSIONAL ARCHITECTURAL LIGHTING

linealightgroup

HOW TO READ PRODUCTS

Envelope_R | 24 V DC | topLED

Family Name | Power | L.E.D. Type



Pictograms **(for legend see page 38)** | Light emission

Image of the product with relative technical dimension drawing plus information on the hole to be drilled on the ceiling

Power: 1,5 W DC

Product code | Colour Rendering Index

	Cri	Cct	lm S - D	Opt
WH 76104	80	W	213 - 103	07
GR 76105	80	N	224 - 108	
BG 76106	80			
DB 76107	80			

Finish | Code and colour temperature | **lm-S** Lumen Source | **lm-D** Lumen Delivery | Code Optics

The effective flux **(lm-D)** is detected, taking as a reference the Flood optics and a neutral colour finish. For more in-depth details, please consult the technical data sheets on the website: **linealight.com**

How to configure a product: guide to the composition of the finished code

76106 + N + 07 = 75106N07

1st product code | 2nd temperature code | 3rd optics code | Composed finished code


Code Electronics | Electronic and dimensional information

89488	89179	89359	99332	99722
ON/OFF 1 - 3 art. 80 x 100 x h 31	ON/OFF 1 - 5 art. 92 x 117 x h 38	ON/OFF 1 - 11 art. 115 x 140 x h 50	0/1-10V 1 - 35 art. 60 x 158 x h 35	DALI 1 - 26 art. 63 x 191 x h 38

Colors				Cct		Optics	
WH	White	BG	Black	W	3000	07	Asymm
GR	Grey	DB	Dark brown	N	4000		

"Colors", "Cct" and "Optics" Legend

Envelope_R | 24 V DC | topLED





Installation with outer casing

1,5 W DC

		Cri	Cct	lm S - D	Opt
WH	76104	80	W	213 - 103	07
GR	76105	80	N	224 - 108	
BC	76106	80			
DB	76107	80			

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 9 art. 80 x 100 x h 31	ON/OFF 1 - 15 art. 92 x 117 x h 38	ON/OFF 1 - 30 art. 115 x 140 x h 50	0/1-10V 1 - 98 art. 60 x 158 x h 35	DALI 1 - 78 art. 63 x 191 x h 38

4 W DC


		Cri	Cct	lm S - D	Opt
WH	76090	80	W	468 - 227	07
GR	76091	80	N	490 - 237	
BC	76092	80			
DB	76093	80			

Electronics

89488	89179	89359	99332	99722
ON/OFF 1 - 3 art. 80 x 100 x h 31	ON/OFF 1 - 5 art. 92 x 117 x h 38	ON/OFF 1 - 11 art. 115 x 140 x h 50	0/1-10V 1 - 35 art. 60 x 158 x h 35	DALI 1 - 26 art. 63 x 191 x h 38



Photometric curves of Envelope_R 4W (76090)

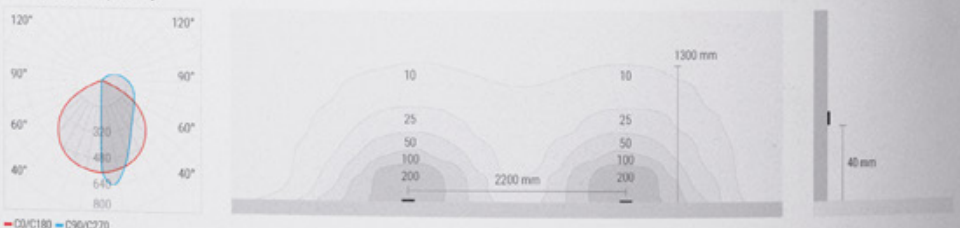

C0/C180 – C90/C270

Optic 07 Asymmetric

Accessories



EP6 **98111** Recessed casing (standard box mod. 503)

suitable for: Envelope_R

News | Wall path markers

34

Colors		Cct	Optics
WH White	BC Black Grey	W 3000	07 Asymm
GR Grey	DB Dark brown	N 4000	



rubber range index

Rubber	Rubber 3D PIXEL RGBW	Rubber 3D	Rubber 3D RGBW	Rubber 3D PROtection	Rubber 3D Optics	Rubber 2D	Rubber 2D Mini
							
	36	40	40	46	56	63	64

rubber abaco

	Dimensions	**Length**	**Finish**	**W/m**	**CCT**	**Optic**	**IP**	**Cutting Length**
Rubber 3D PIXEL	14 x 14 mm	0,5 m 1 m 5 m	White	13,2	RGBW	Diffused emission	IP67	125 mm
Rubber 3D	14 x 14 mm	1 m 5 m 10 m*	White Concrete	10 16,5	2700 K 3000 K 4000 K RGBW	Diffused emission	IP67	45 mm
Rubber 3D PROtection	14 x 14 mm	1 m 5 m	White	10 16,5	2700 K 3000 K 4000 K RGBW	Diffused emission	IP68 IP69	-
Rubber 3D Optics	14 x 14 mm	1 m 1,5 m 3 m	White Black	22	2700 K 3000 K 4000 K	Spot Flood	IP67	168 mm
Rubber 2D	14 x 14 mm	1 m 5 m 10 m	White	10 (24V DC) 10 (48V DC)	2700 K 3000 K 4000 K	Diffused emission	IP67	50 mm
Rubber 2D Mini	6 x 12,4 mm	1 m 5 m 10 m	White	5	2700 K 3000 K 4000 K	Diffused emission	IP67	50 mm

* Lengths available for Rubber 3D Concrete finish: 1 m and 5 m




LIGHT UP NEW IDEAS!




RUBBER

It is light that becomes line and plays with three-dimensionality, it bends, turns upside down. **Rubber is a tangible sign towards a new conception of light.**




A NEW LIGHT-EXPERIENCE!

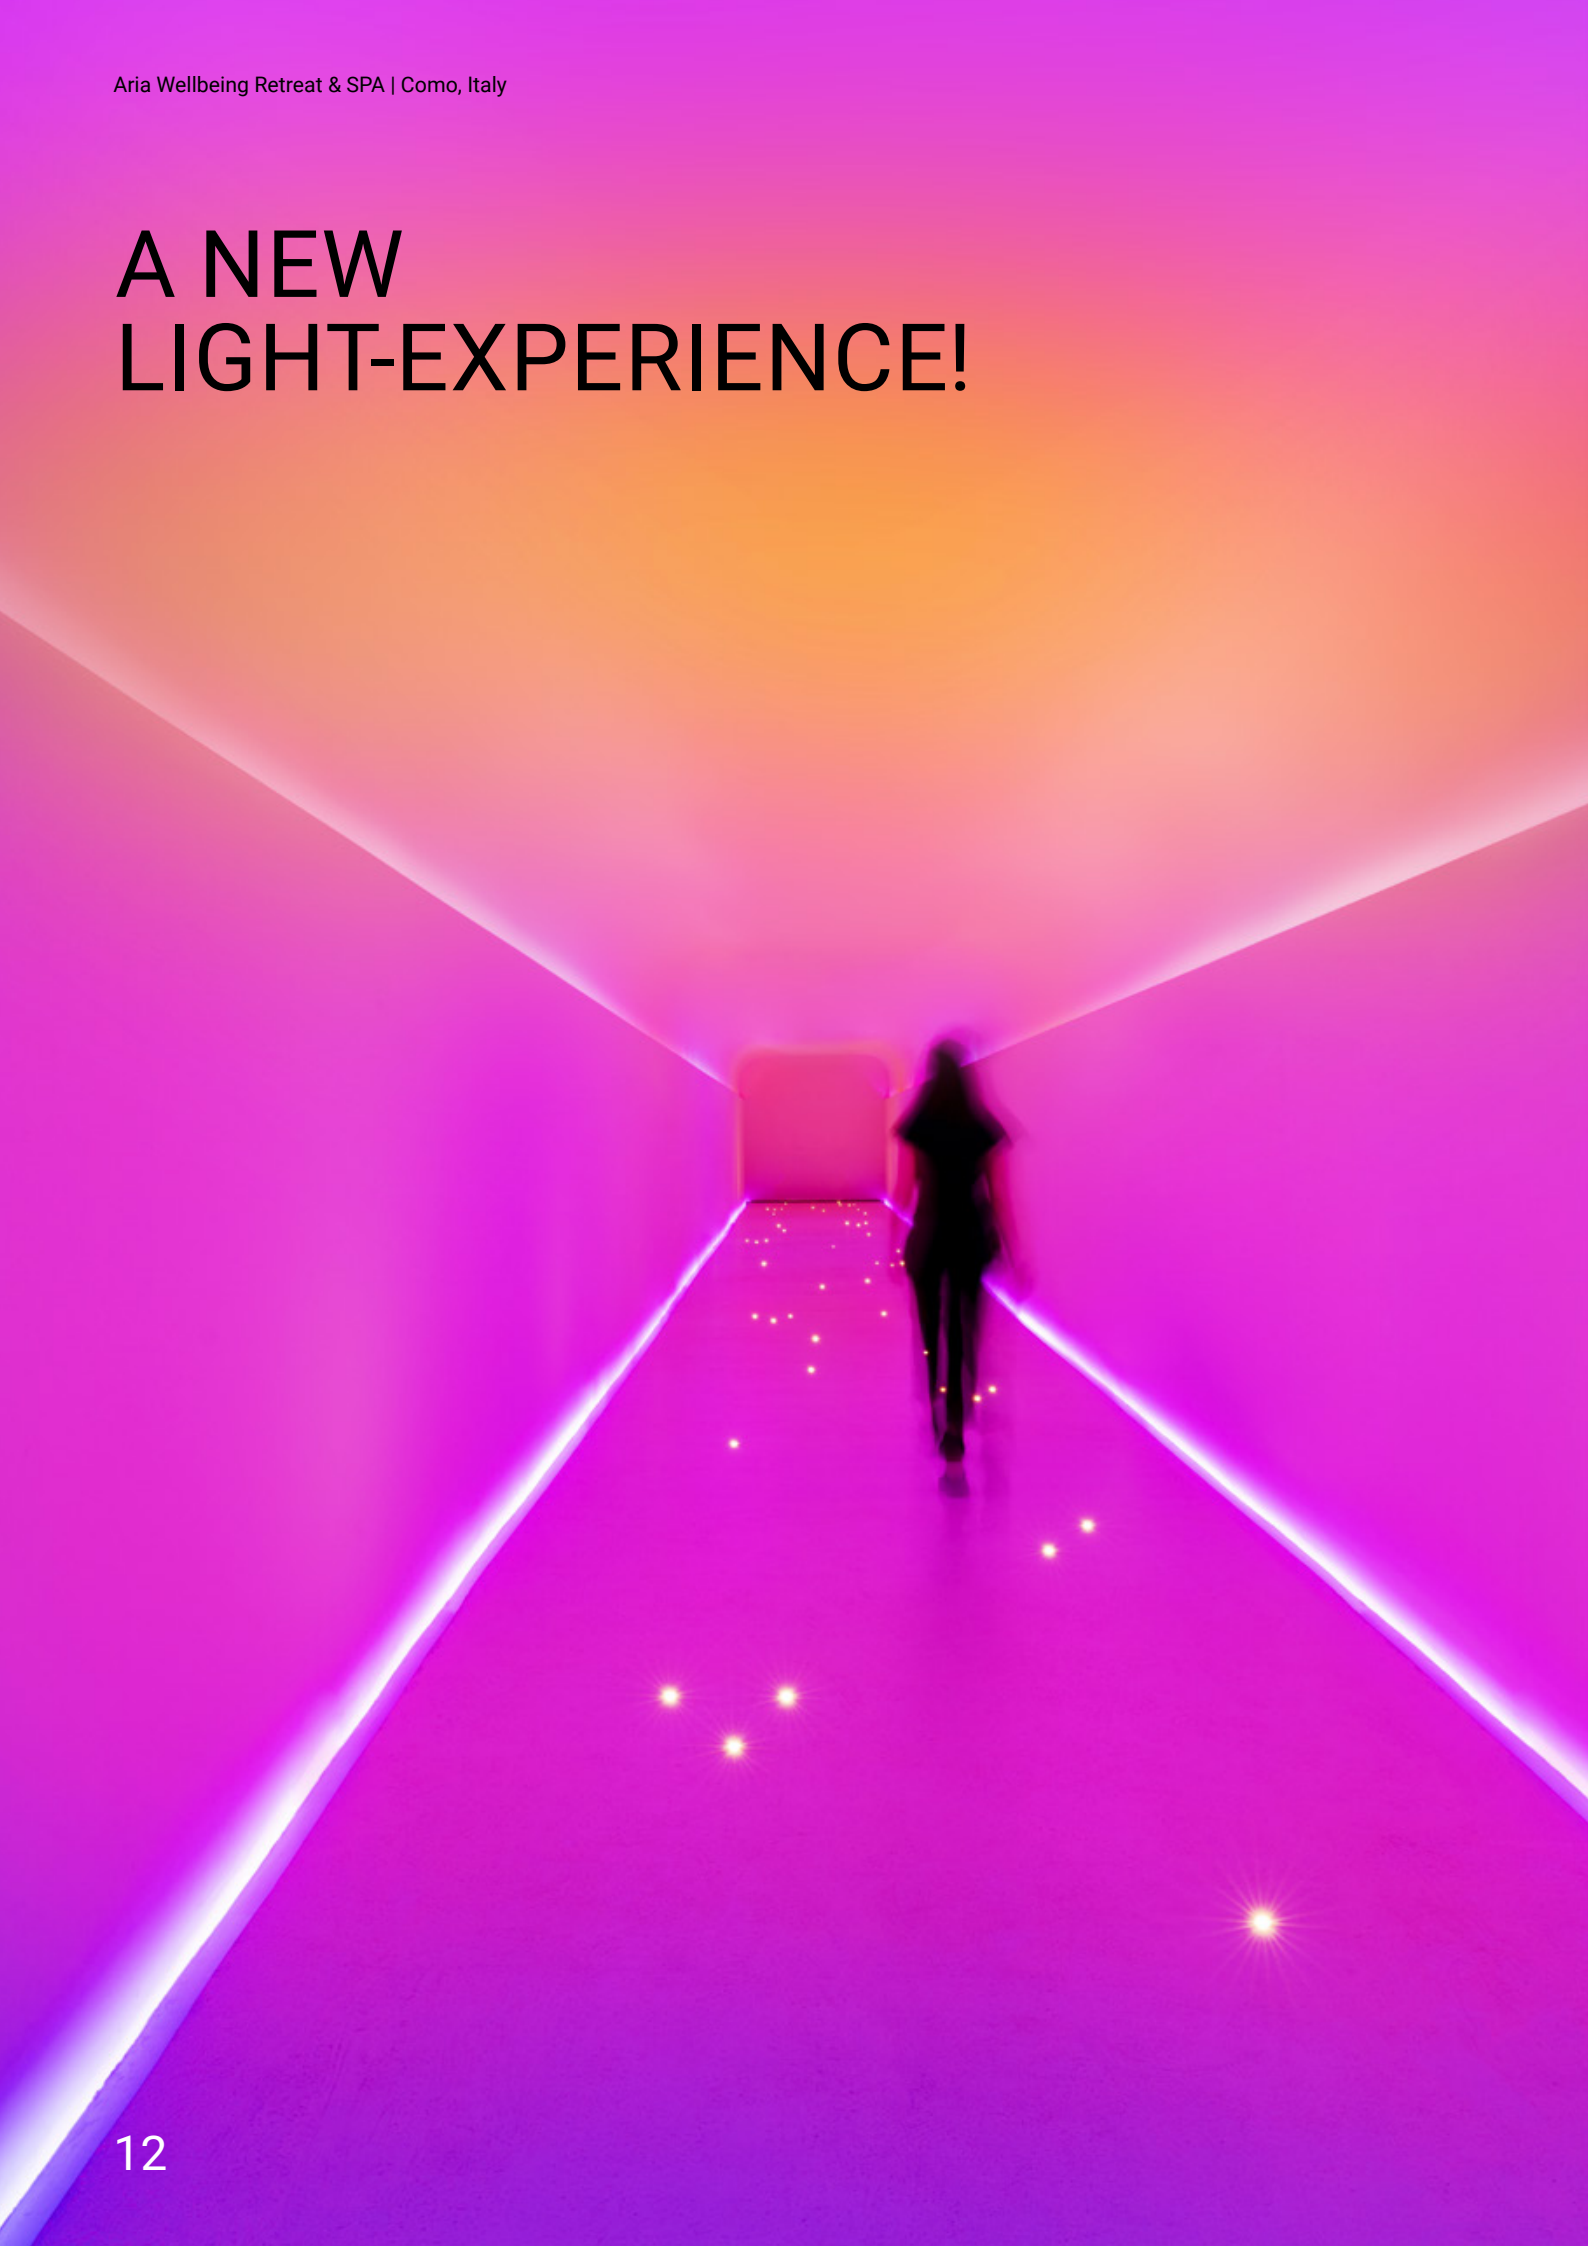


Rubber is not only flexible light, but also colour. Get inspired in a light path like the experiential tunnel created inside “Aria Wellbeing Retreat & SPA”, an extraordinary mix of colours integrated in the architecture of a path, that offers a unique experience for the visitor.






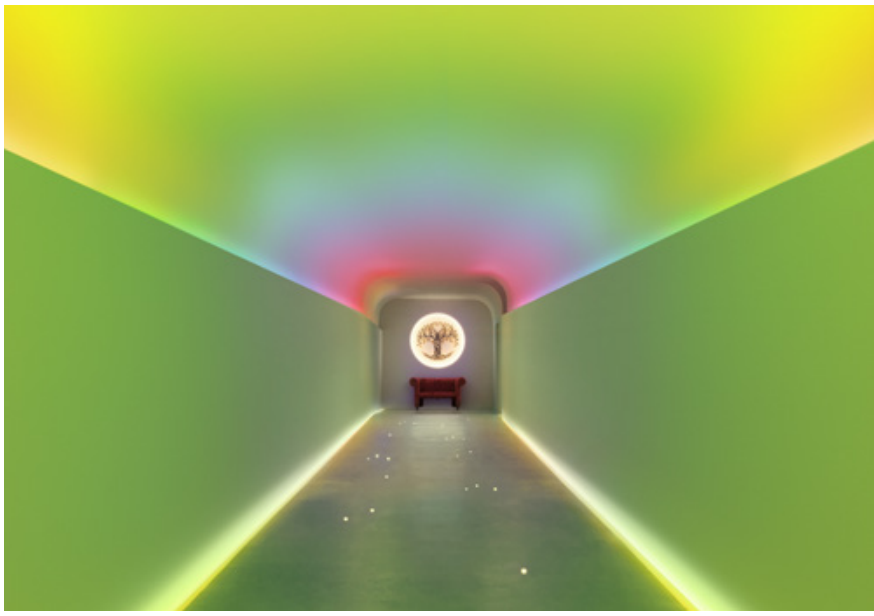

VERTICAL, HORIZONTAL, CIRCULAR, TWISTED, OUTSIDE OR INSIDE: ARCHITECTURE HAS NO BOUNDARIES!

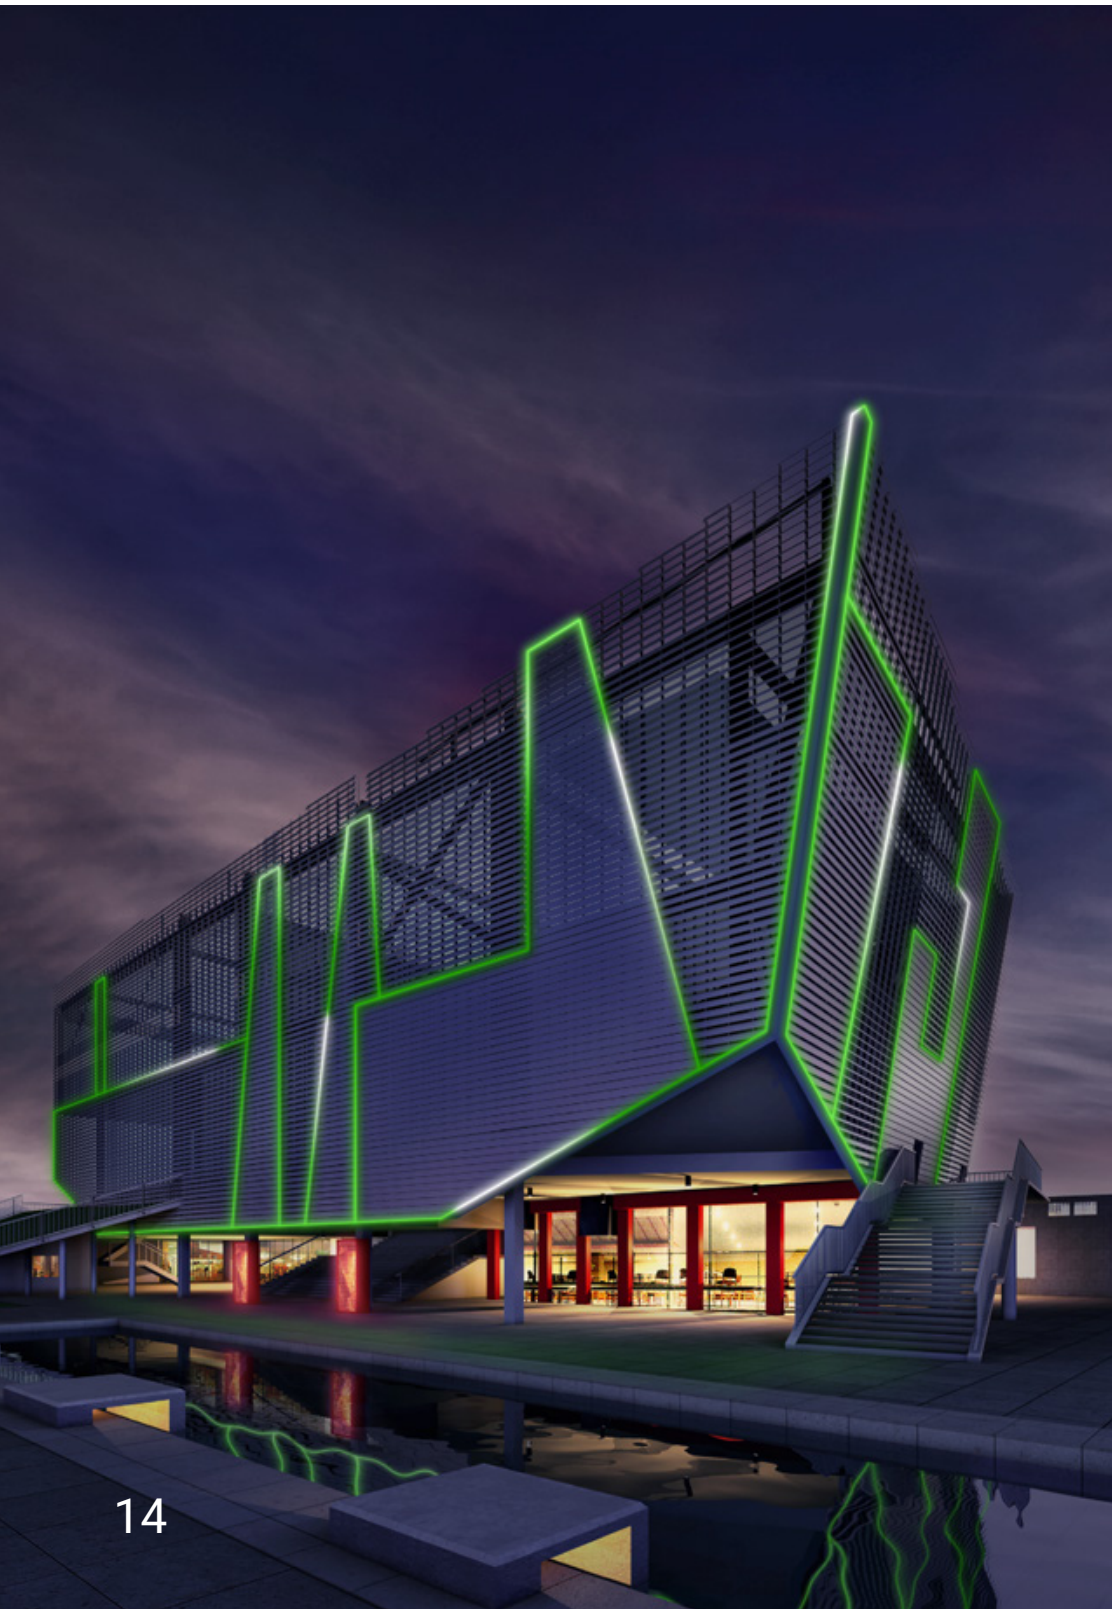

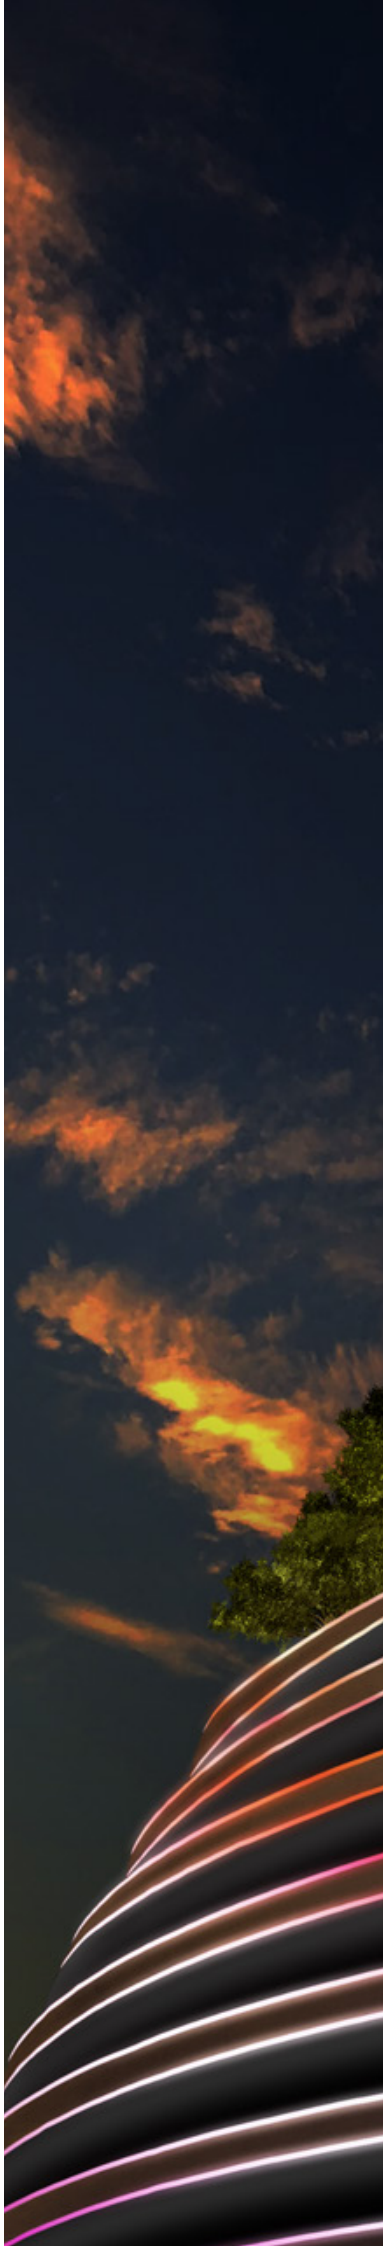



CUSTOM LIGHTING FOR OMANTEL HQ

We used our latest products and technologies to create a design for the exterior by Visual Energy Associates of the Omantel headquarters. The focus was to light the external architecture in a functional way in order to give it a unique and unforgettably, spectacular visual impact.





Omantel | Muscat, Oman




Nammos village | Mykonos, Greece



RUBBER TALK ONLY ONE LANGUAGE

Click
to play the video

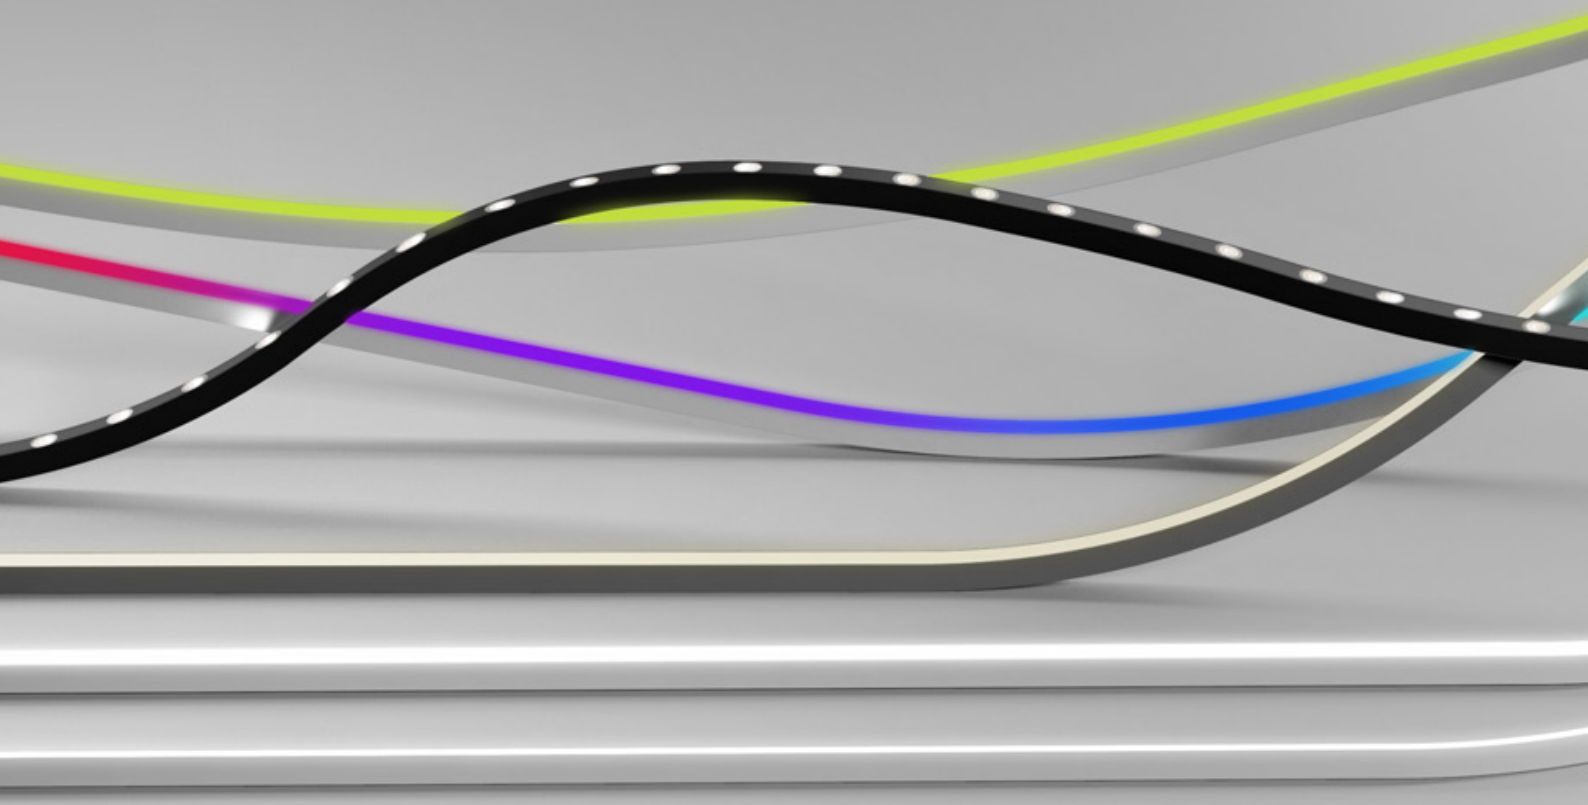

3 warranty
3 years warranty

ICs Regulator

≤3 MAC ADAM
Step MacAdam ≤ 3

3m
Submerged up to 3m

Reverse polarity protection

Possibility of cutting


UV resistance

Self-dissipation

Salt water resistance

Chlorine resistance

Made in Italy

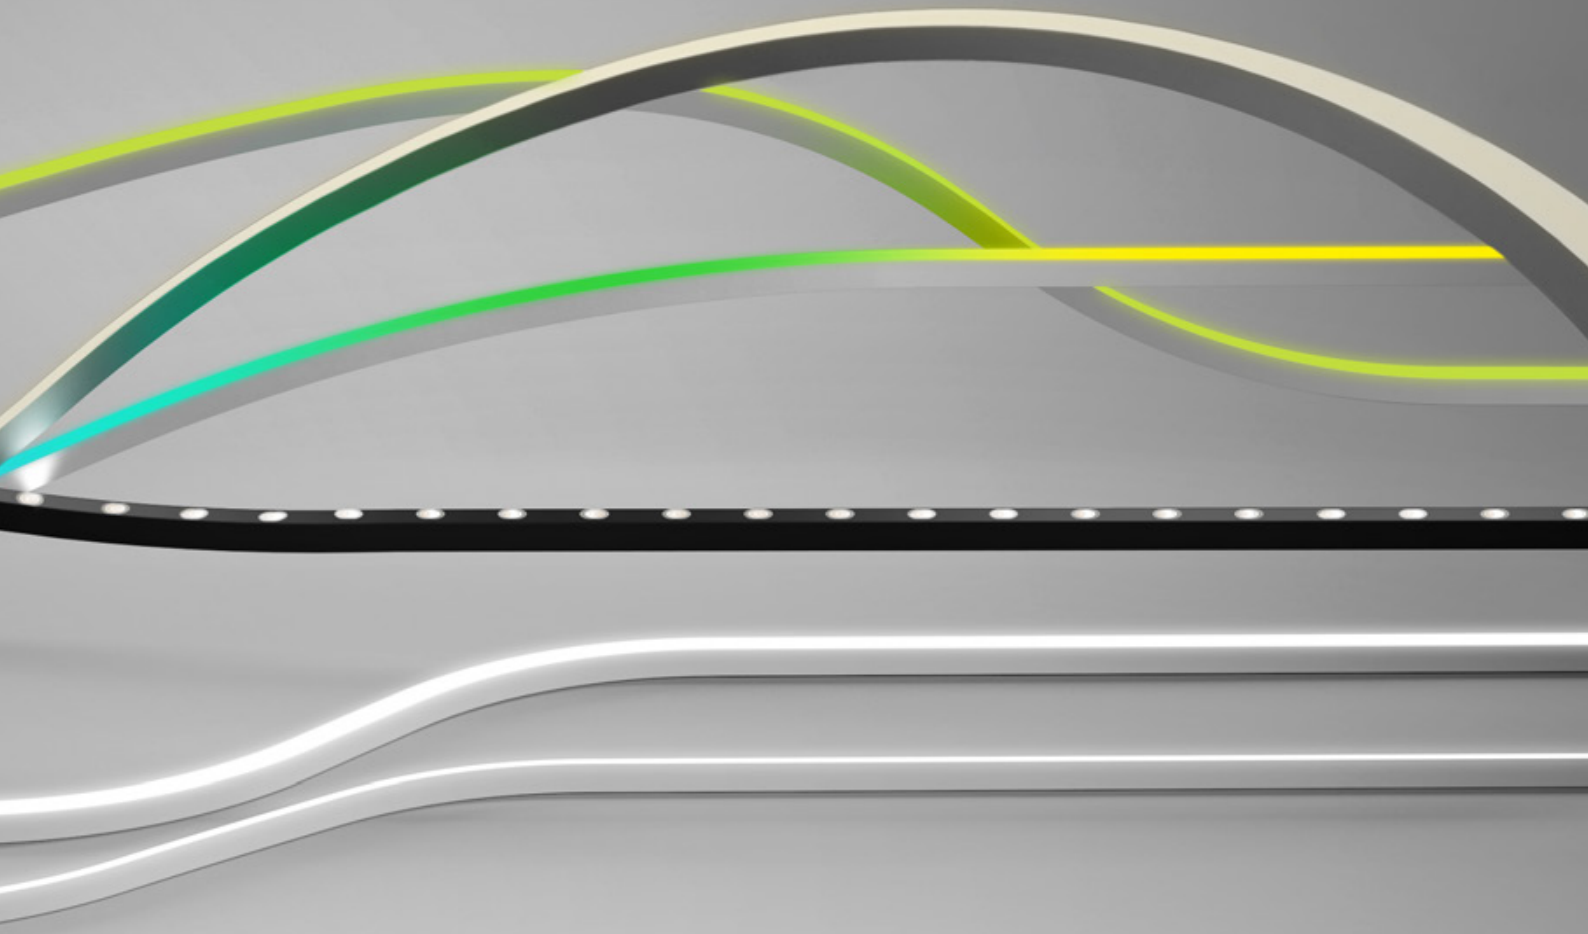

2D
2 Axis Movement

3D
3 Axis Movement

6mm
Minimum Dimensions

IK10
Index of protection against mechanical impact

Solvent resistance

IP67
Minimum degree of protection from external agents IP67

IP68
Degree of protection against external agents IP68

IP69
IP69 Degree of protection

RGBW
RGBW Technology

PIXEL
PIXEL Technology

MADE IN ITALY


Linea Light Group is a manufacturing organisation which, along with its industrial capacity, has skilfully preserved a measure of that manual craftsmanship which has always characterised “Made in Italy” products. From conception to creation and all the way to assembly, our products are the combination of high technology, research and know-how, a recipe that has made Italian companies unique the world over. Alongside our traditional machines, we have placed new and high-performance units, allowing us to complete all the processes that have made our products unique in-house. We have gone beyond manufacturing: a perfect product must also be tested and certified. This is why Linea Light Group has its own in-house laboratory. Here, various quality, heat resistance and impact tests can be carried out, as well as ensuring that the uplights are able to withstand the weight of vehicle traffic and verifying the IP classes of our submersible products.



GUARANTEED QUALITY

3 years warranty

The Rubber fixtures are certified and guaranteed for 3 years and up to 5 upon request. The various types, colour temperatures and power, thanks to a short and controlled supply chain totally Made in Italy, are available immediately. The company is ISO 9001 certified. The materials and components used for the creation of our products are guaranteed by international certifying bodies and are marked and tested in accordance with ICE/EN standards.

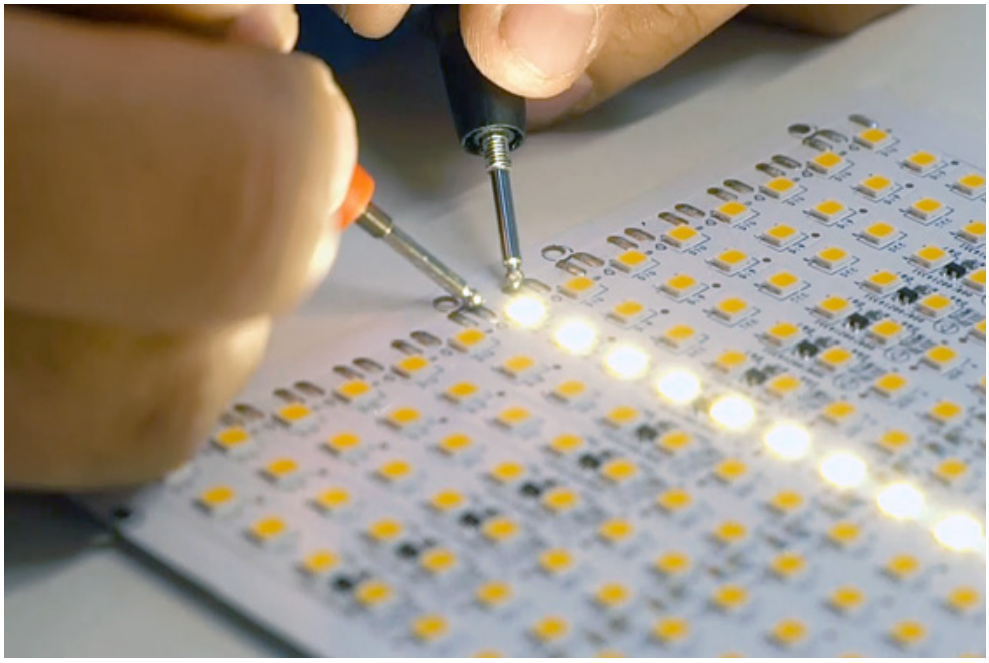


MATERIALS



All the material used to create Rubber are of very high quality. Rubber has a Technopolymer structure and the diffuser is a polyurethane resin, which guarantees maximum flexibility and versatility thanks to the quality of the raw materials used. Raw materials that are predisposed to resist ageing and yellowing over time. The copper used for the PCB circuits, which is 99.9% pure, guarantees the perfect continuity of the electronic connections. The Rubber range is, by its very nature, self-dissipating. It does not need additional cooling bodies or systems and it has a reversed polarity system that acts as a guarantee and protection in the event of incorrect connection.


SELF-DISSIPATION

The circuit is specifically designed to allow rapid passage of the heat from one layer to another. This factor, combined with the use of high efficiency components, helps dissipate the heat generated and guarantees a high level of self-dissipation for the product, allowing the operating temperature to be controlled. Therefore, Rubber can be applied on multiple surfaces to create all kinds of lighting installations.

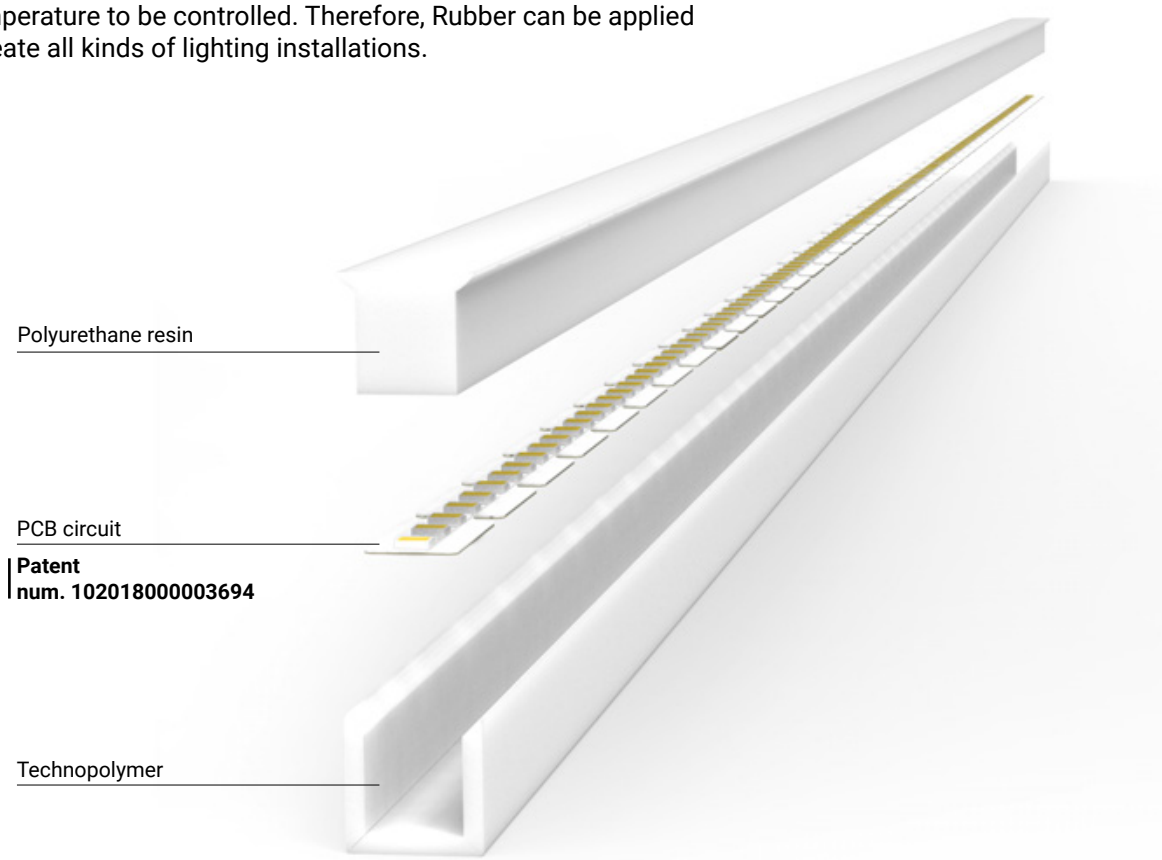


ICS REGULATORS

Thanks to special integrated circuits, Rubber guarantees uniform lighting along the entire length of the product. A specific chip intervenes upon a voltage drop, typical when there are extended circuits, preventing drops in the luminous flow. Thanks to these innovations, Rubber perfectly maintains lumen values from the start to the end of the circuit.

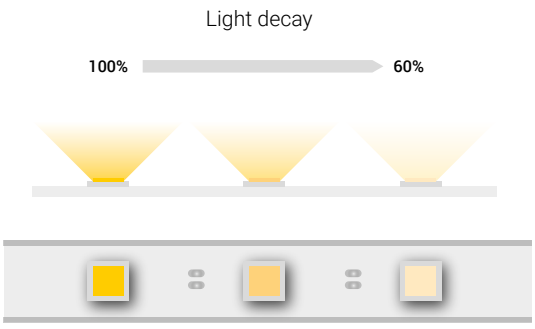


Rubber without ICS Regulator

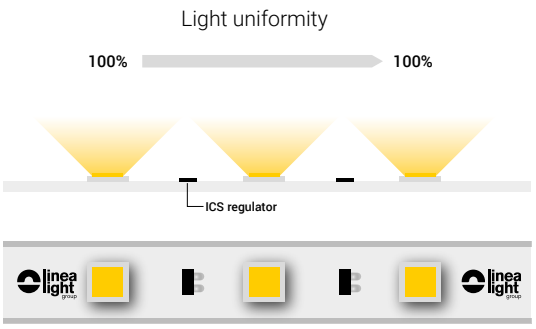

Rubber with ICS Regulator

GLOW WIRE TEST

This is a fundamental safety test, the purpose of which is to simulate the effect of thermal stress that can be produced by electrical overheating in order to assess the risk of fire. The test anticipates the contact of an incandescent wire with the insulated parts of the product in order to assess how the material behaves under thermal stress in normal operating conditions. The minimum temperature required by current regulations is 650°C. Our products have been tested and verified at 960°C to provide the maximum guarantee in terms of safety, which demonstrates the quality of the material Linea Light Group selects for use.

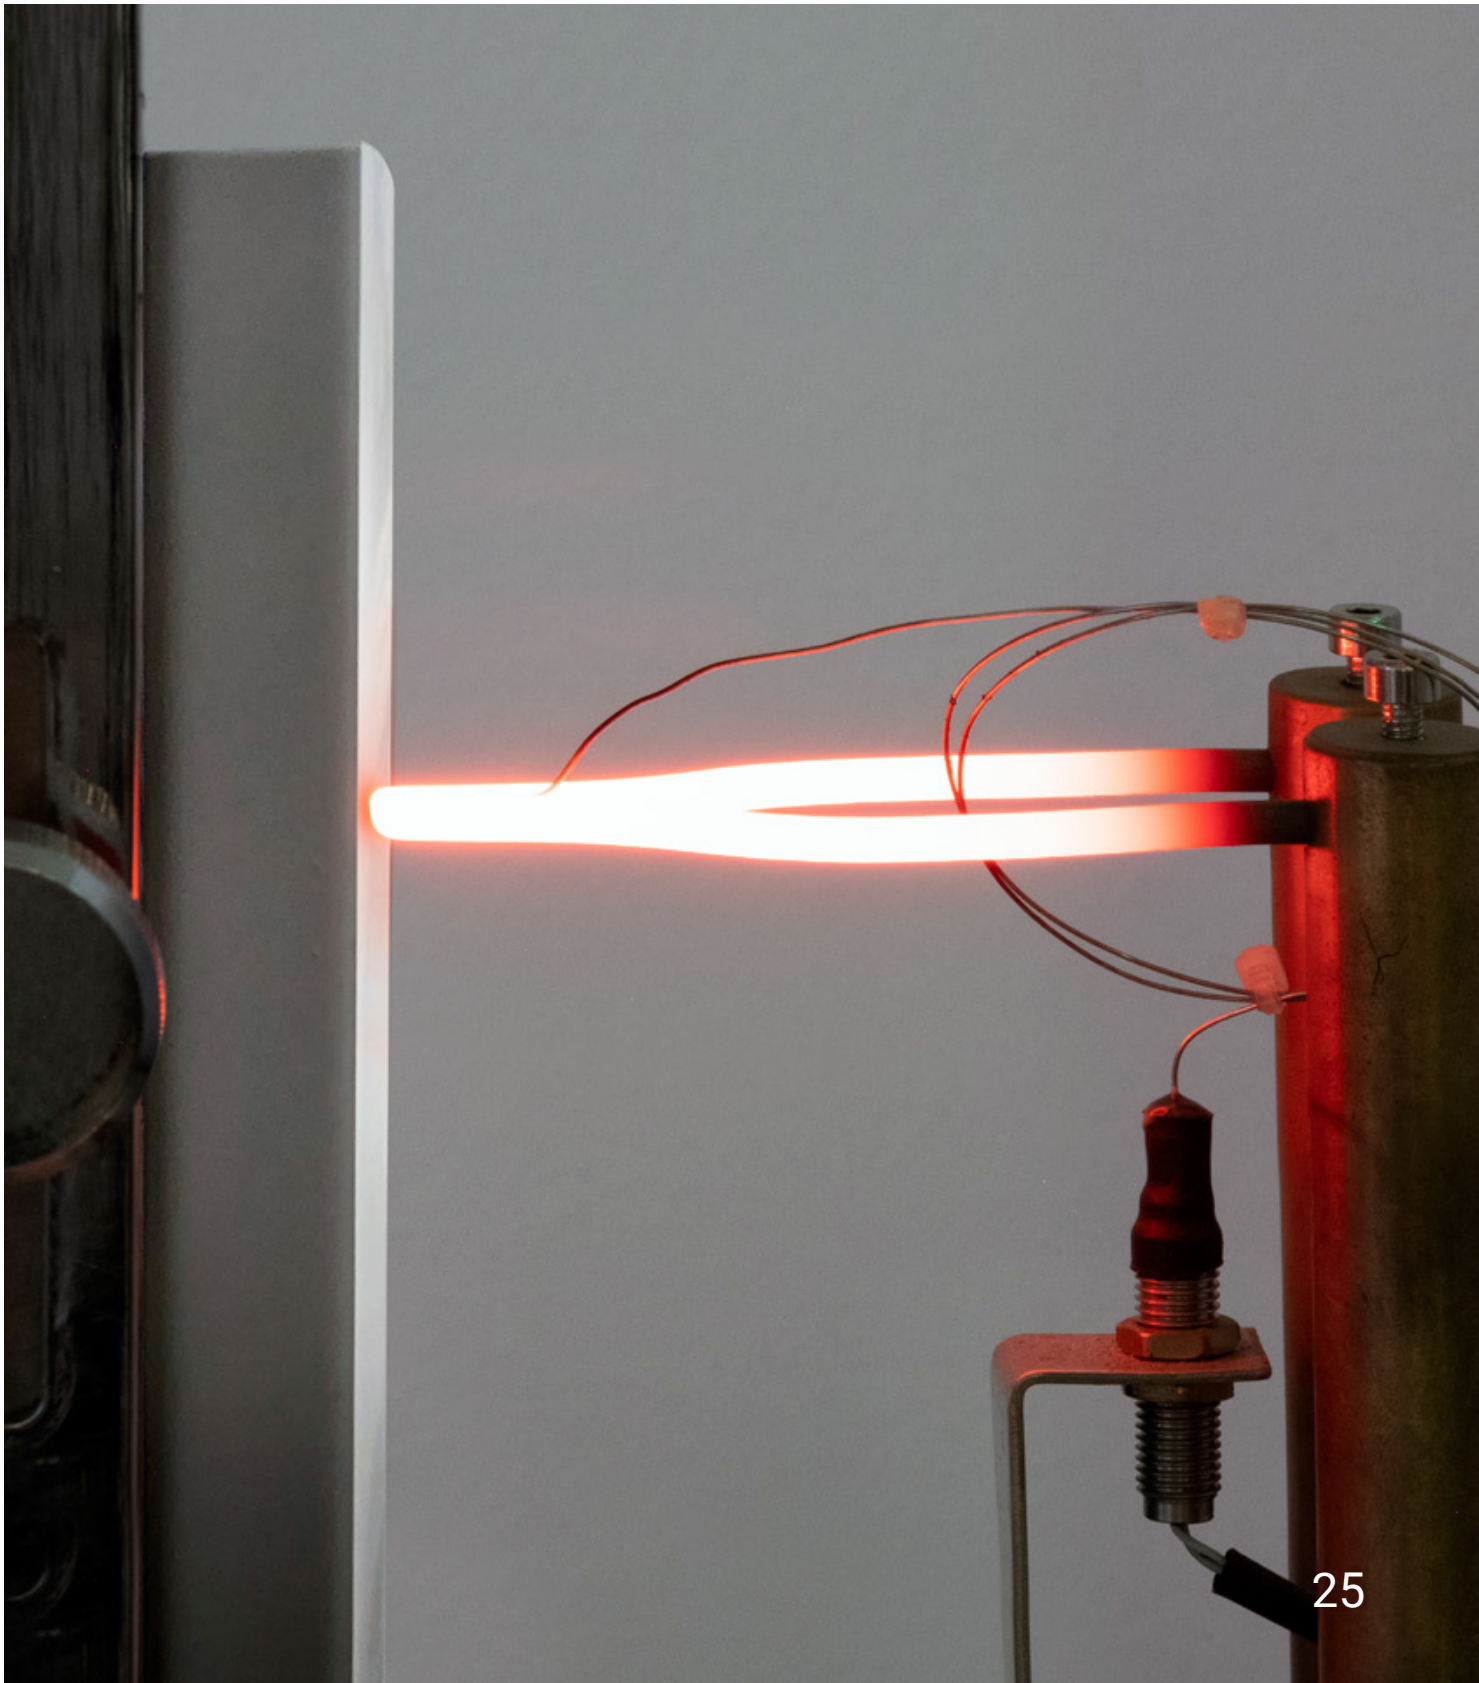




Rubber 3D is unique in its kind. Thanks to the patented structure of the internal circuit, the product can bend on all axes and make new installation methods and application concepts possible. There is no limit to imagination: organic and fluid curved structures with abrupt direction changes are no longer a problem, thanks to the unrestricted flexibility of Rubber 3D. The rolls can be easily cut every 45 millimetres to guarantee maximum versatility of use. The input/output cables permit the connection of multiple fixtures in series, maintaining uniform and constant light for the entire overall length of the installation, without interruptions in the junction points.

Minimum curvature radius: 250mm

CURVATURE RADIUS

Products in the Rubber range boast unique flexibility. The materials used permit formal, sinuous solutions to be created which had been unthinkable until now. Thanks to their intrinsic flexibility it is possible to achieve minimum radii of just 150mm and 250mm! For a professional, this means being able to design freely, without any restrictions: every creation on paper can be faithfully produced.

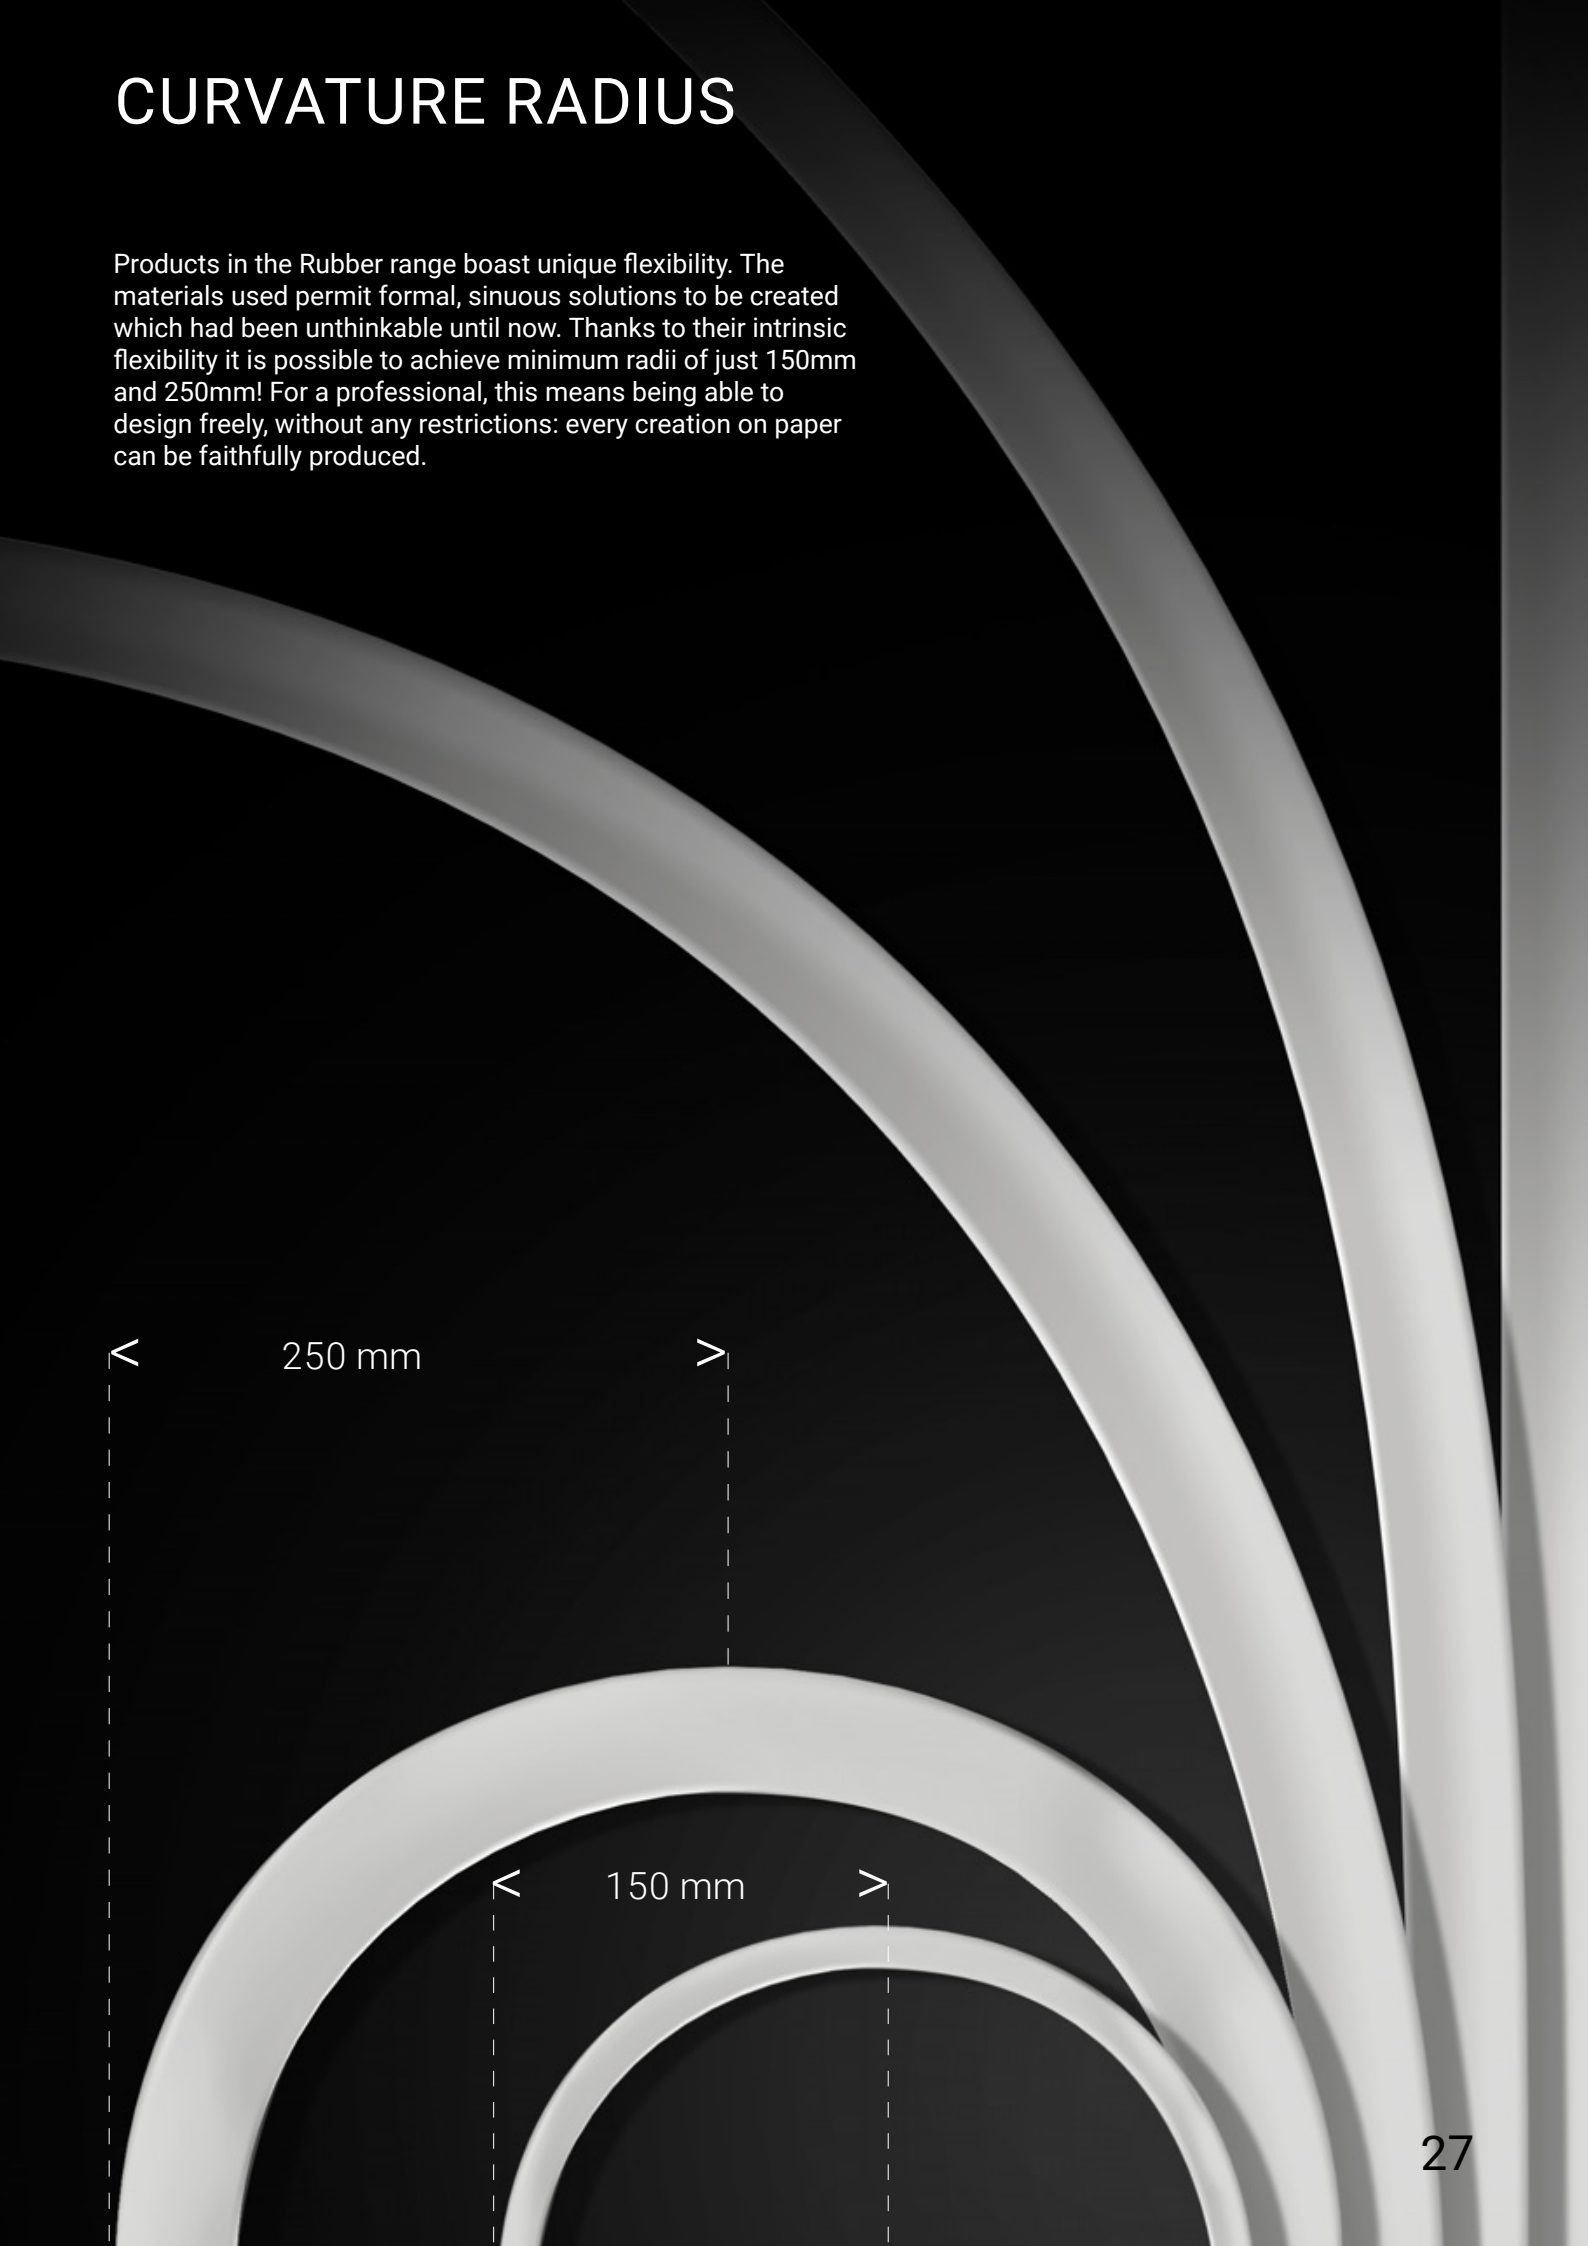

IP67

The entire Rubber range is IP67 certified (with the exception of Rubber 3D PROtection, which includes IP68 + IP69 products), in other words high protection against solid bodies and dust, combined with total protection against rain, liquids, water splashes and temporary submersion in fresh water. IP67 protection means that Rubber can be installed in outdoor environments with high humidity, frequent inclement weather or in settings subject to sand and dust.




RESISTANCE TO SALT WATER AND SOLVENTS


A series of tests are conducted which are fundamental for examining and analysing the way the product behaves in extreme environments, such as the salt spray test, with isopropyl alcohol. The purpose of these tests is to understand the behaviour of the materials in high salinity level areas and in contact with aggressive solvents. The success of these tests makes it possible to be able to guarantee a product that can be installed in every outside environment.



RESISTANCE TO ULTRAVIOLET RAYS

Rubber is made up of different materials: the structure is made in Technopolymer, whereas the diffuser is in polyurethane resin. Like all plastic materials, these are also subject to chromatic and physical variations over time. For this reason, Linea Light Group has selected specific materials that prevent these side effects. The purpose of the UV rays test is to predict ageing in the products.

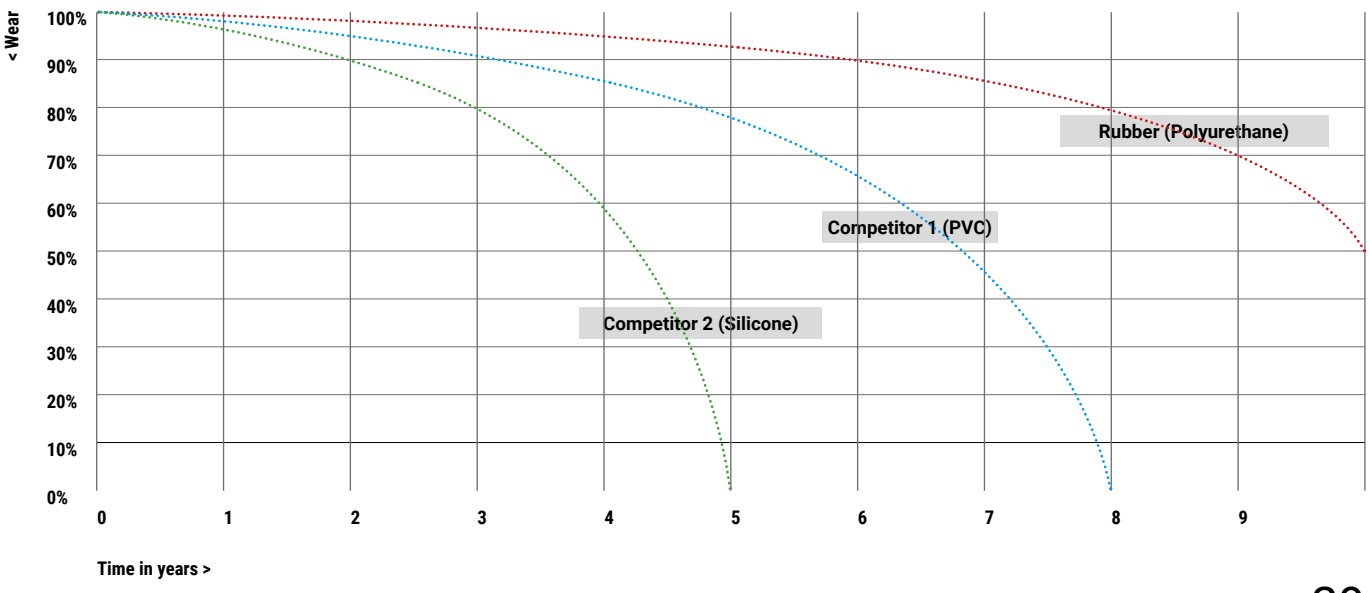

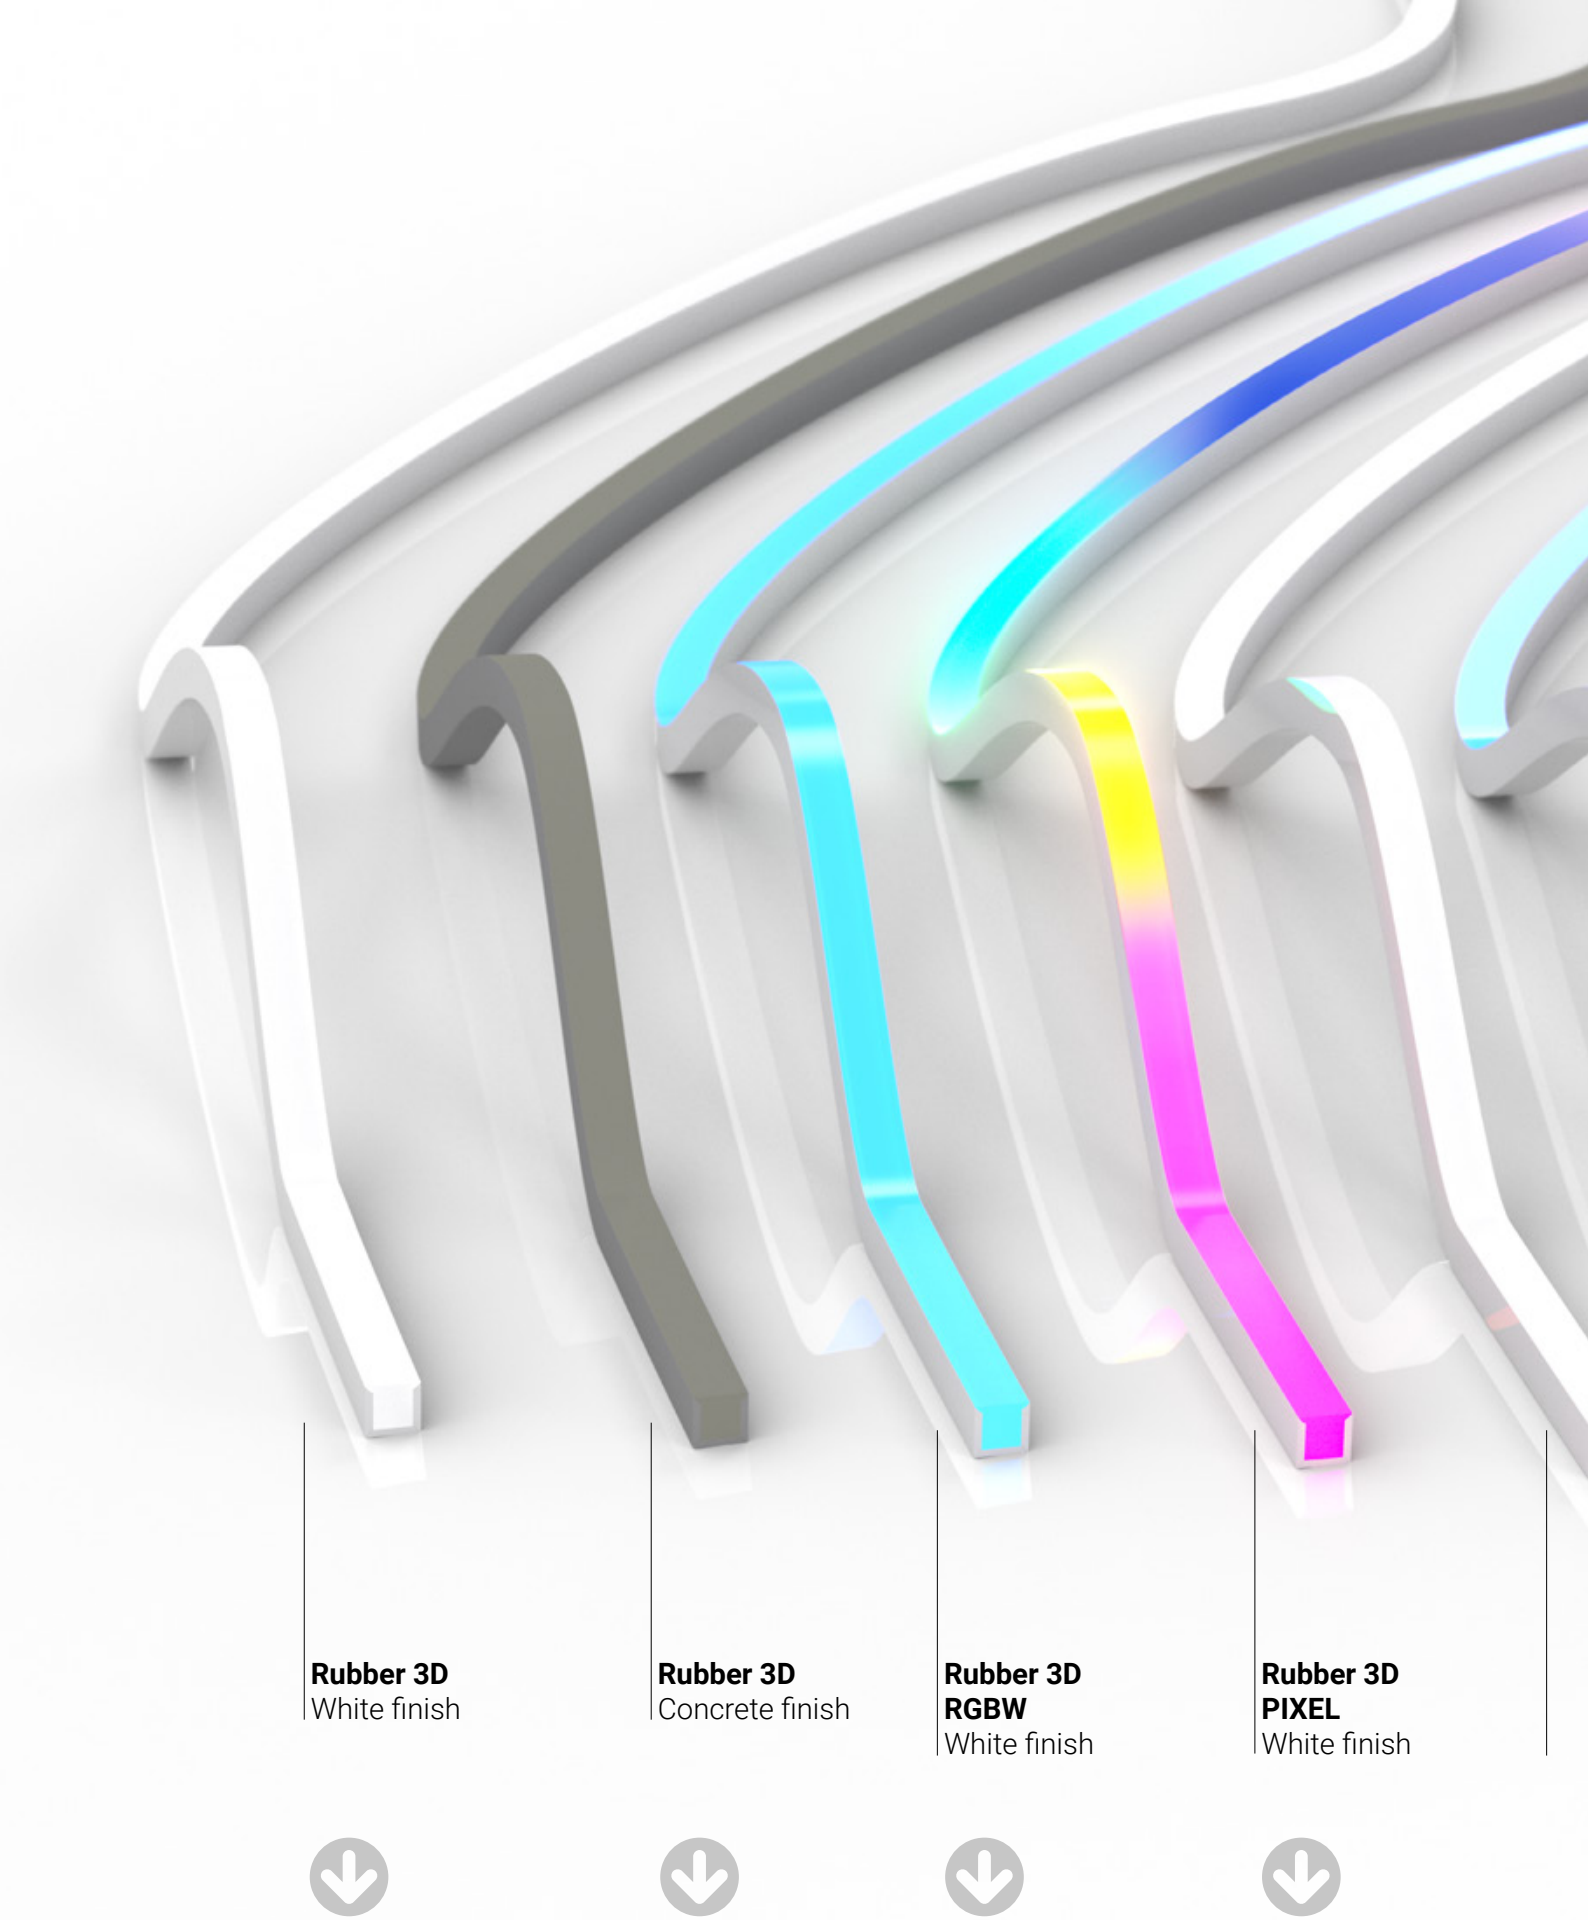


Rubber 3D
White finish

Rubber 3D
Concrete finish

Rubber 3D
RGBW
White finish

Rubber 3D
PIXEL
White finish

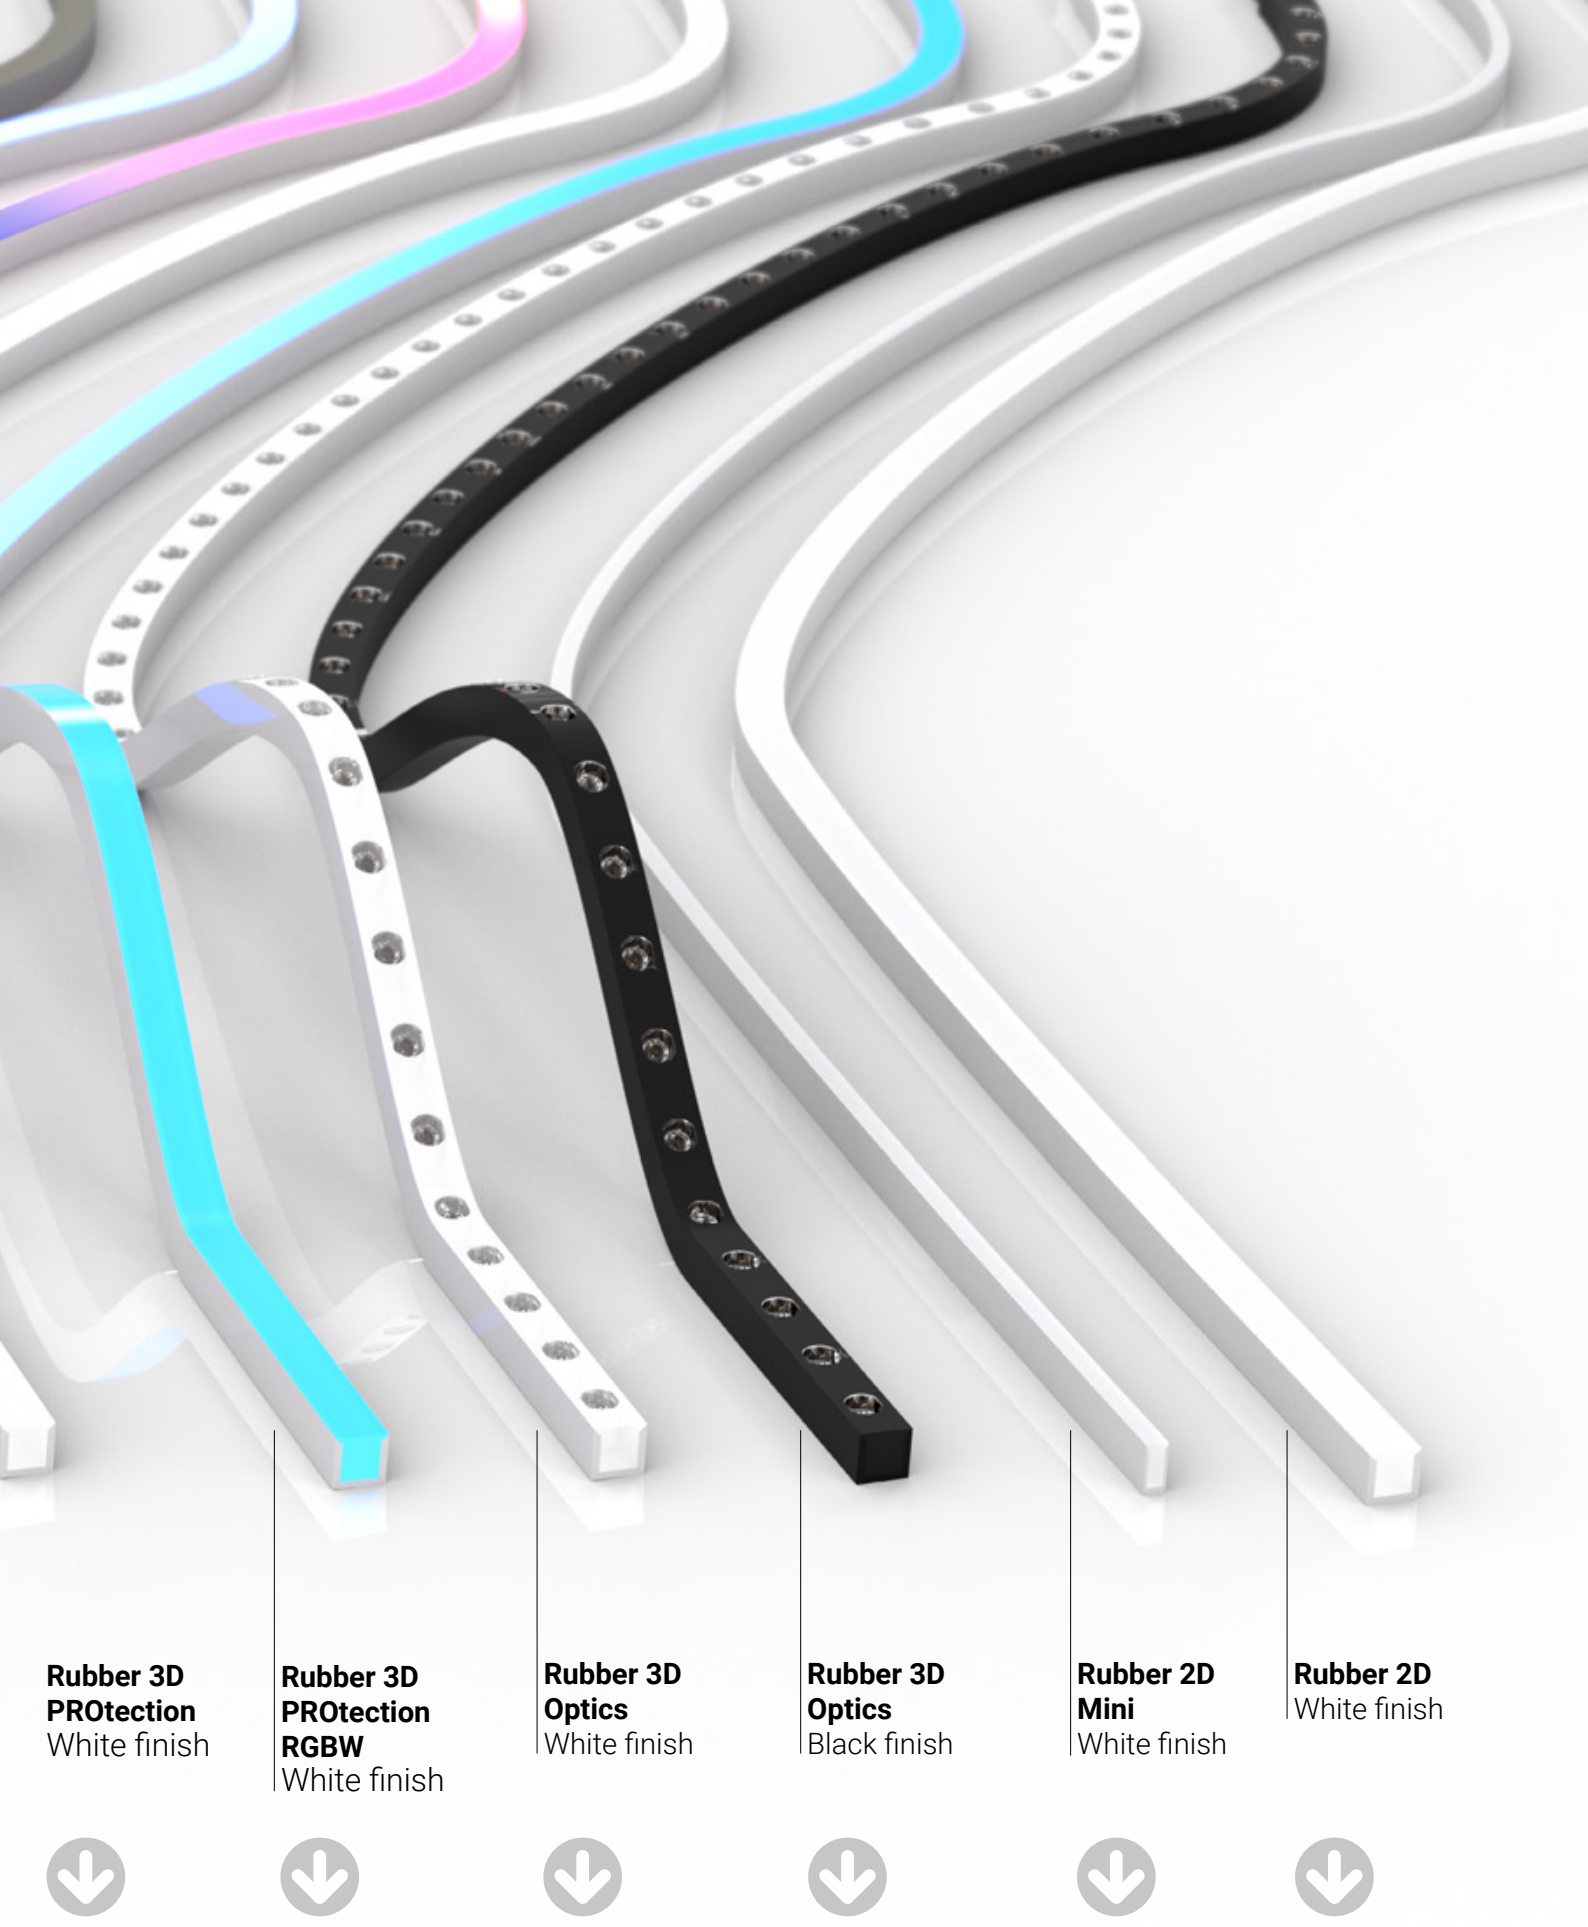

Rubber 3D PROtection
White finish

Rubber 3D PROtection RGBW
White finish


Rubber 3D Optics
White finish

Rubber 3D Optics
Black finish

Rubber 2D Mini
White finish

Rubber 2D
White finish

RUBBER 3D PIXEL

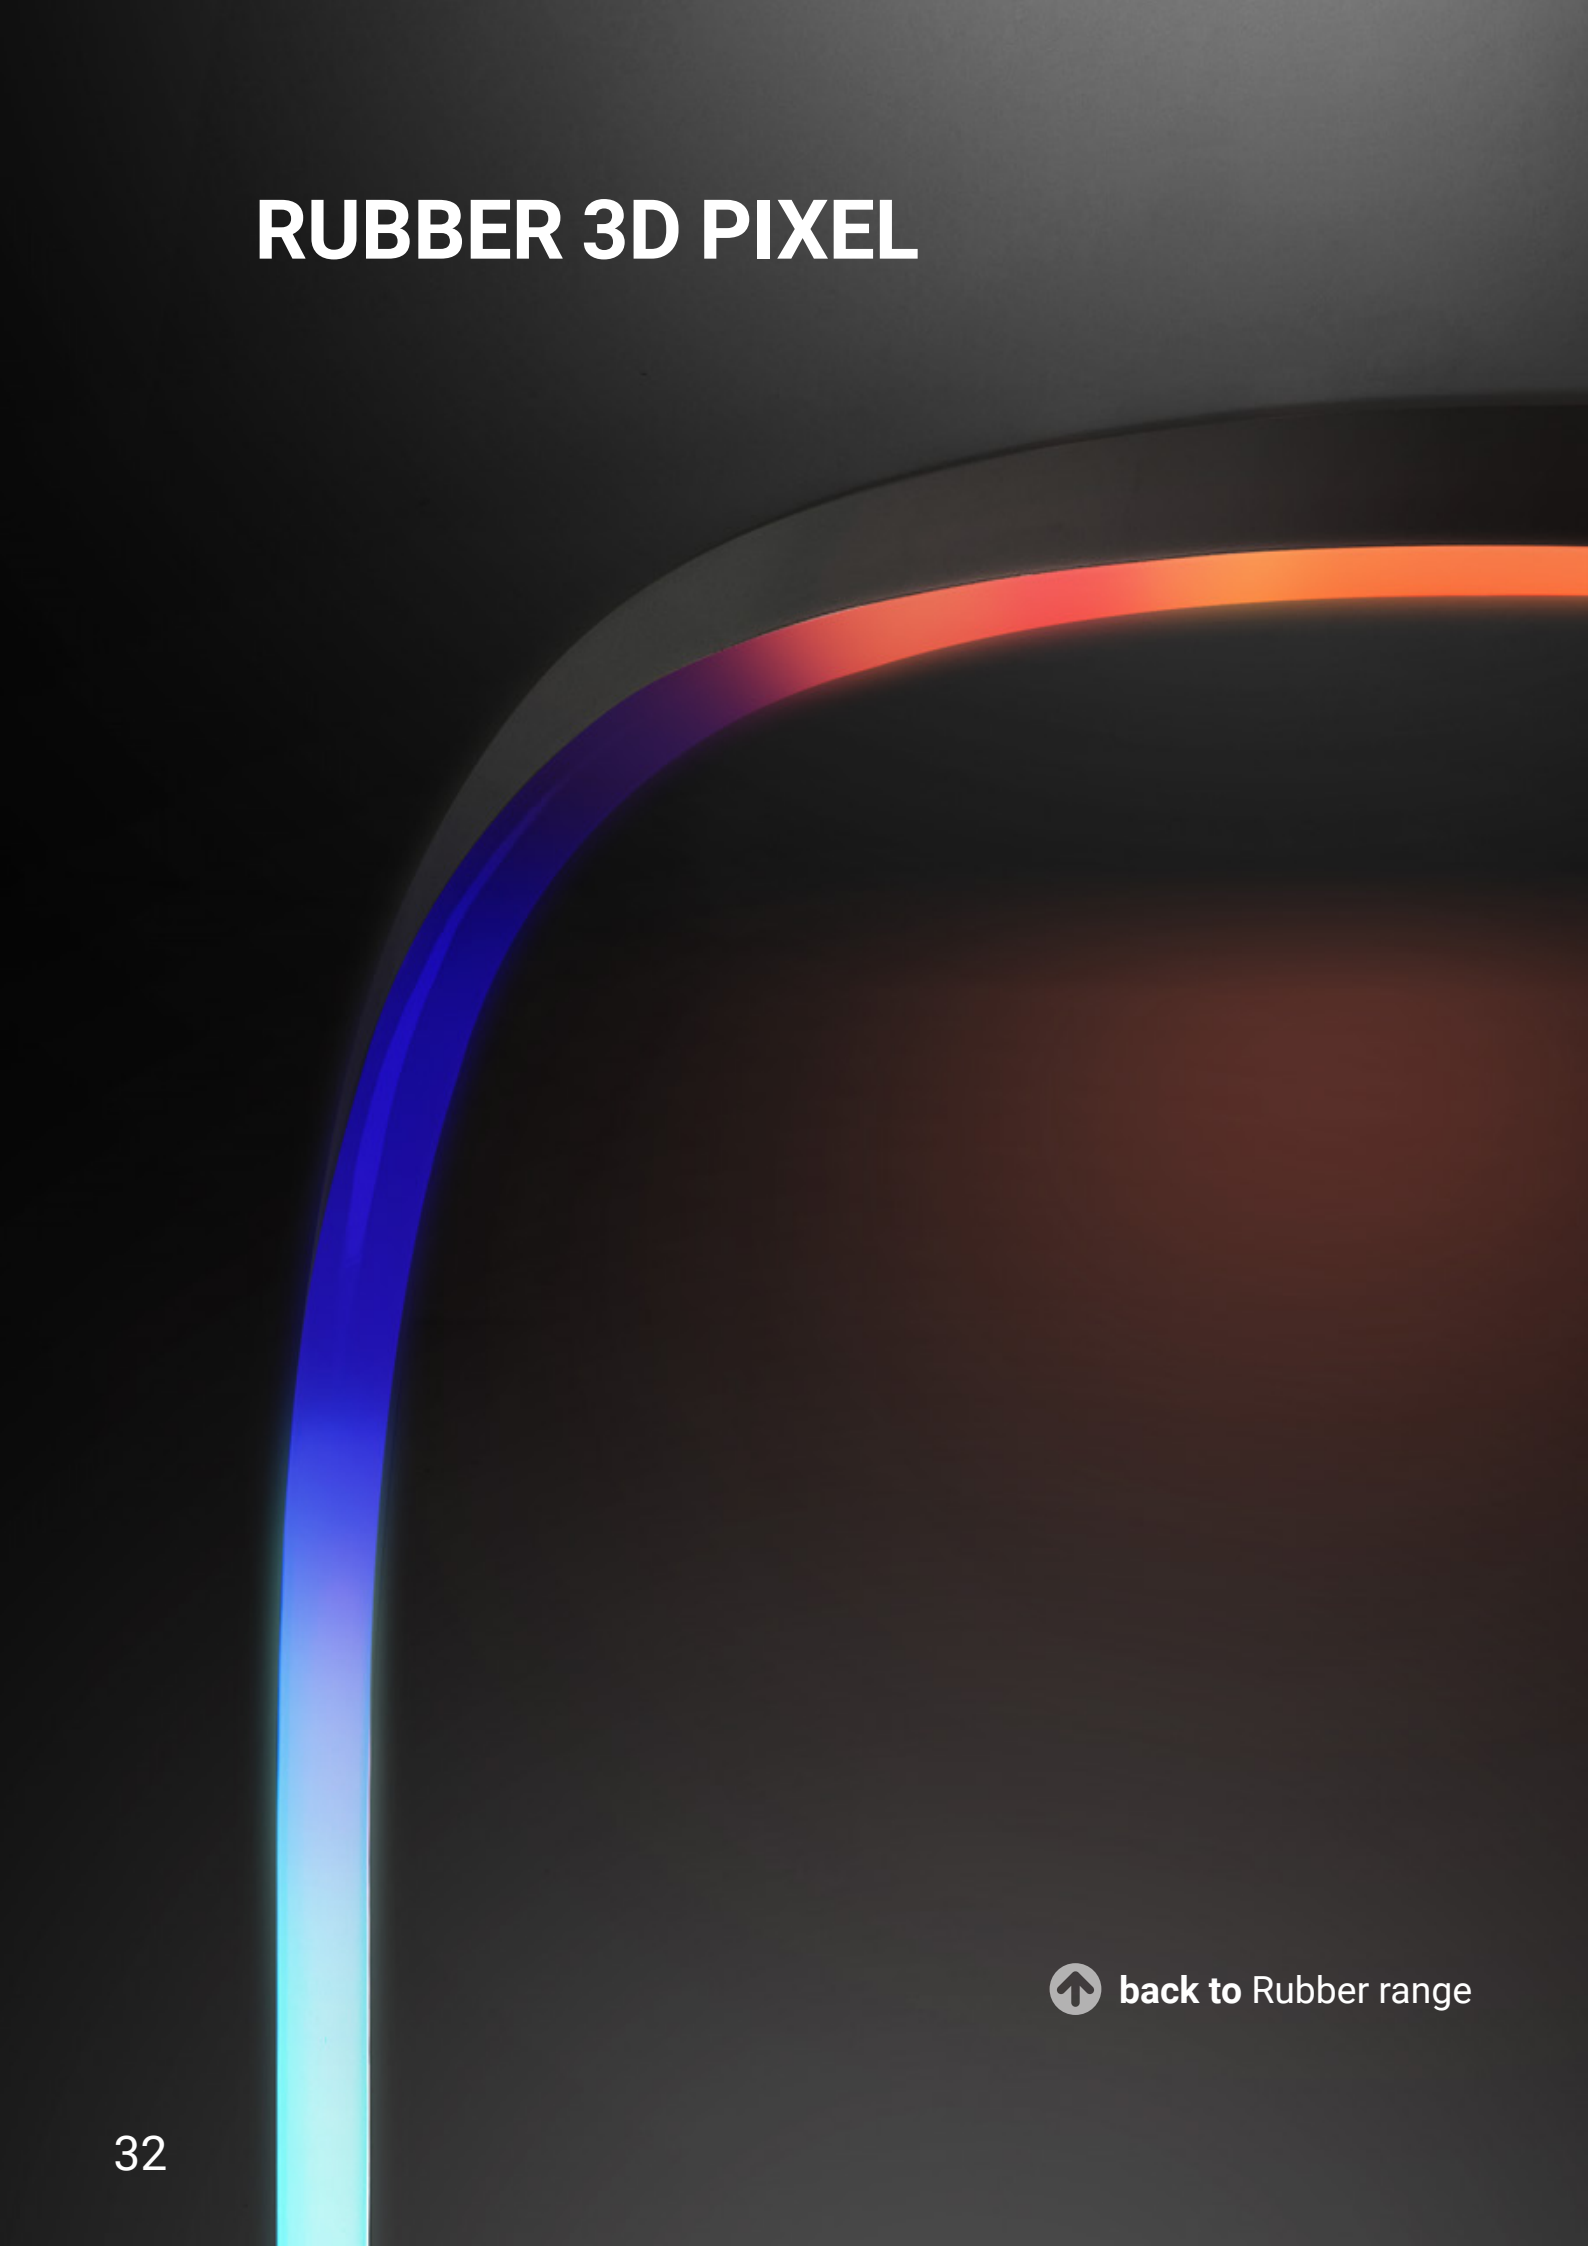


back to Rubber range

PIXEL NEW


Scale 1:1

Rubber 3D PIXEL RGBW allows the creation of dynamic lighting effects, thanks to the i-LèD PIXEL technology allocated internally. The high definition of the pixel pitch, in other words, the space that defines the resolution of the final pixel (125 mm) allows the creation of dynamic light scenarios visible from significant distances, typical in buildings where “Architainment light” is anticipated.

Max resolution: 1 PIXEL = 4 channels (R+G+B+W)



1 PIXEL = 8 channels (R+G+B+W)




1 PIXEL = 16 channels (R+G+B+W)




PIXEL TECHNOLOGY FOR AN ADVANCED DIGITAL EXPERIENCE




Many frames and high resolution for smoother and more accurate animations.

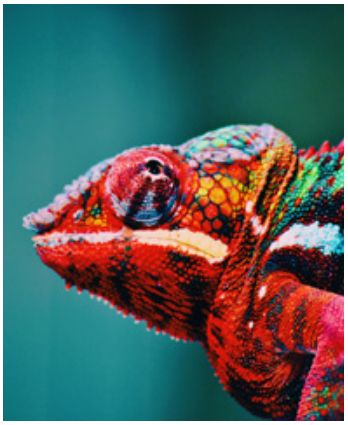

Excellent colour depth for optimized gradient effects.

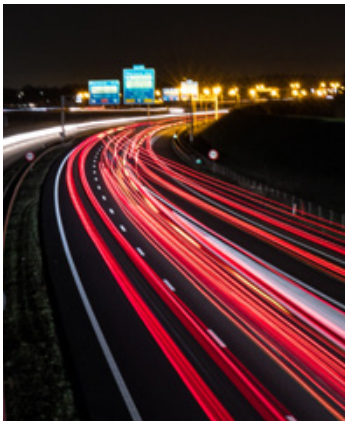


Strength of the signal thanks to the particular SPI digital communication interface.

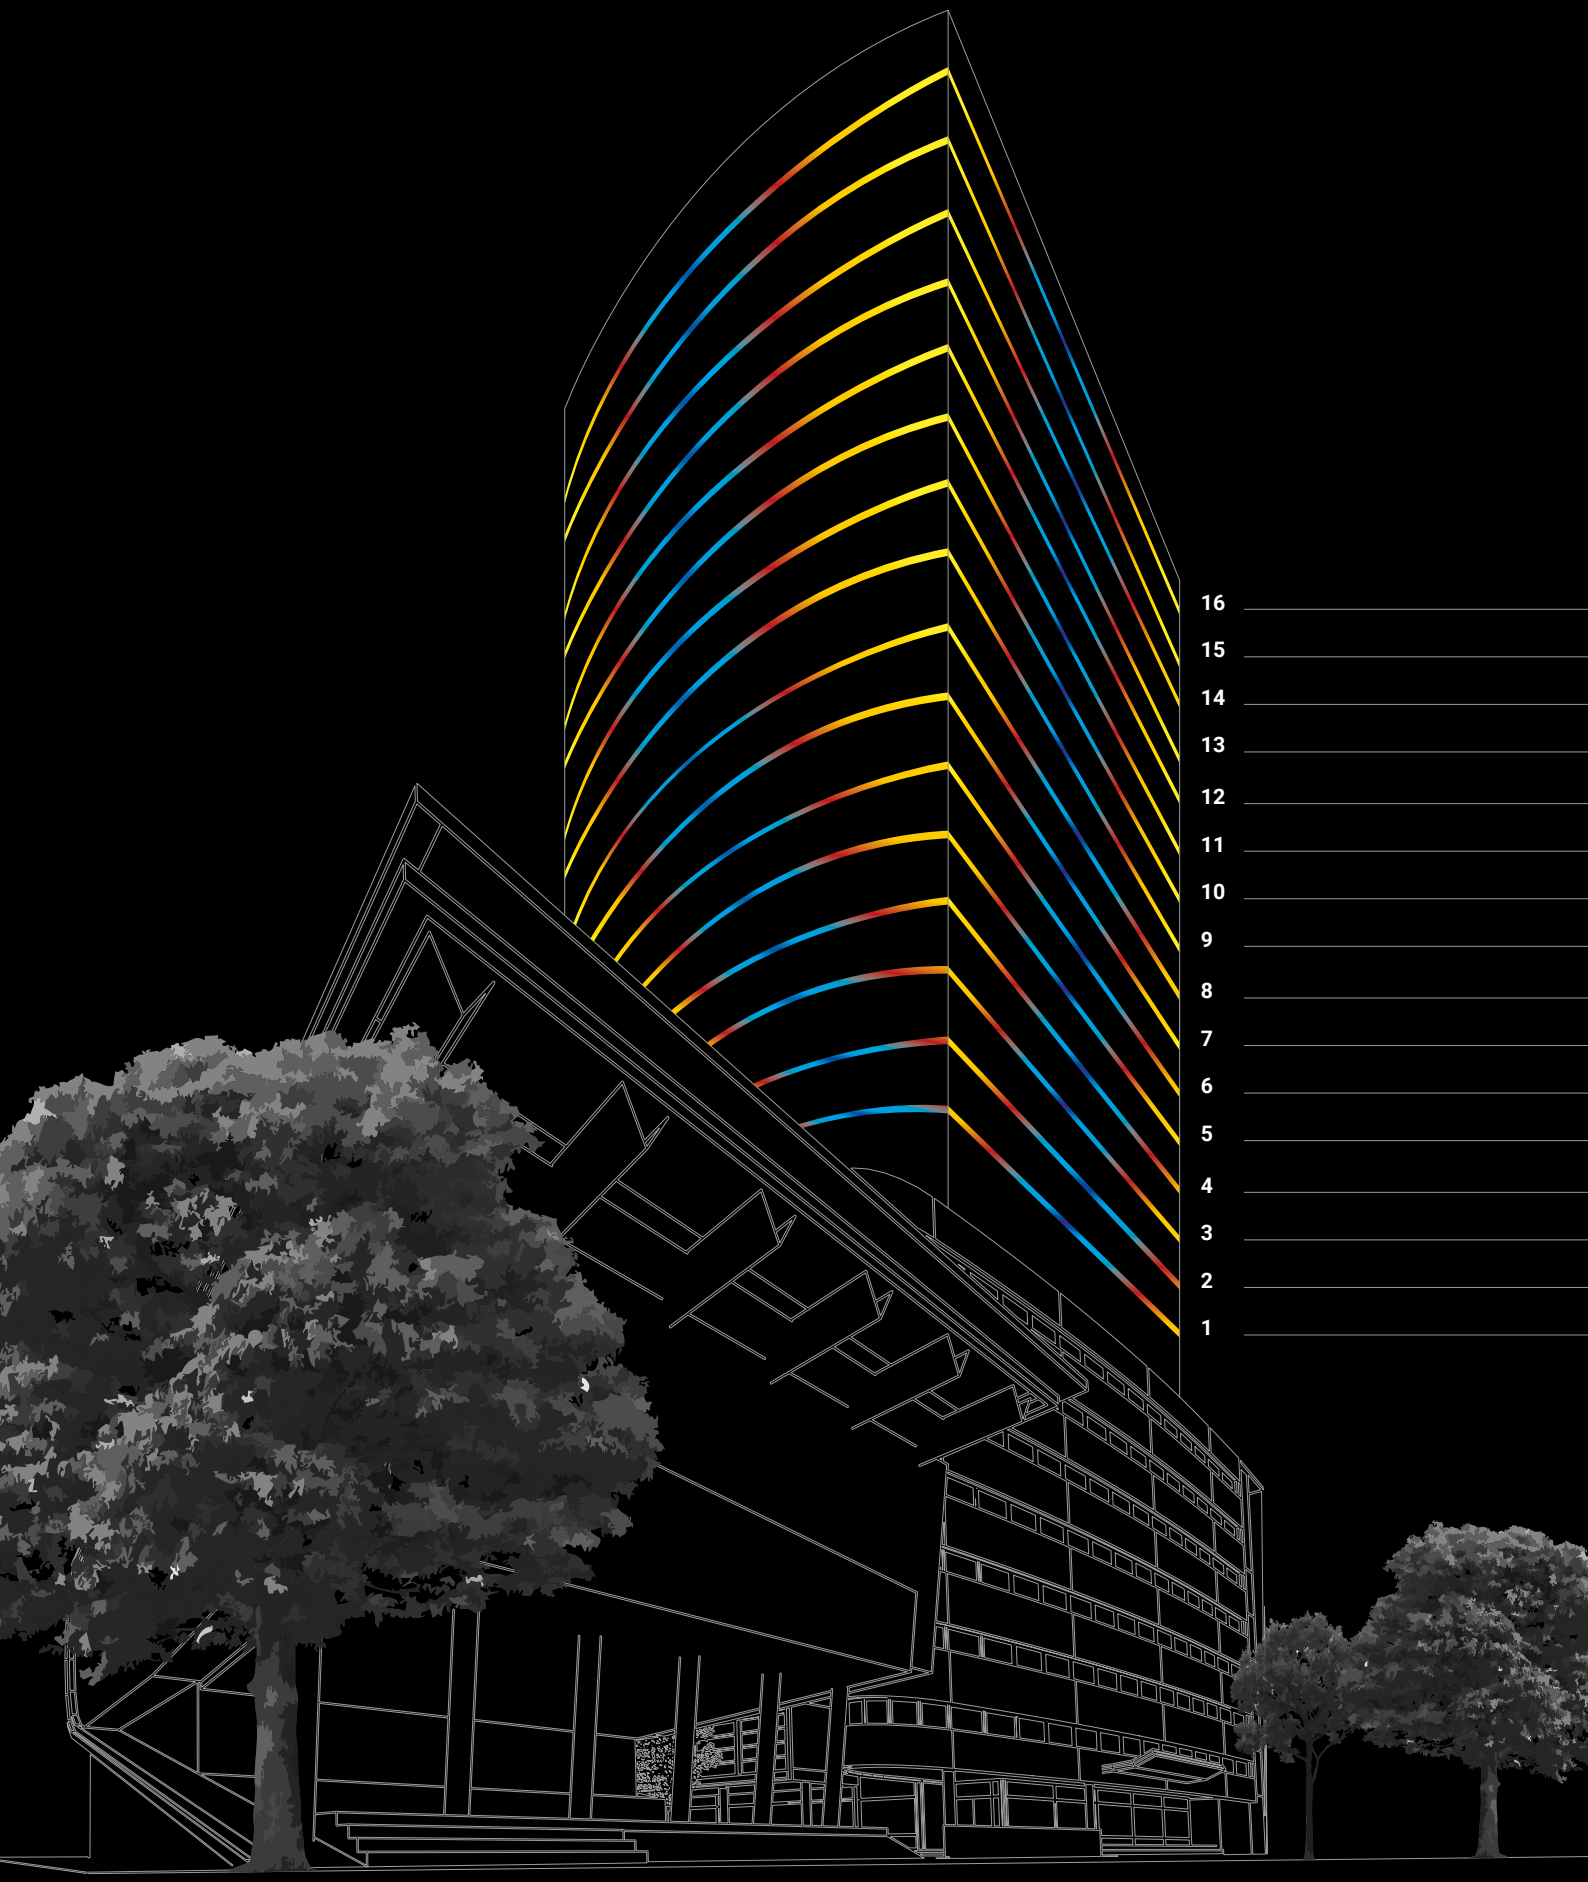
16
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1

EVERYTHING UNDER CONTROL WITH SPI

- SPI (Serial Peripheral Interface) high speed digital communication interface
- Automatic addressing of the devices for a simplified configuration
- A single cable to convey more information and carry a greater number of pixels
- Quick installation thanks to the reduced number of cables required for the system
- Can manage 1024 channels (32 m Rubber 3D Pixel) at the speed of 40 frames per second

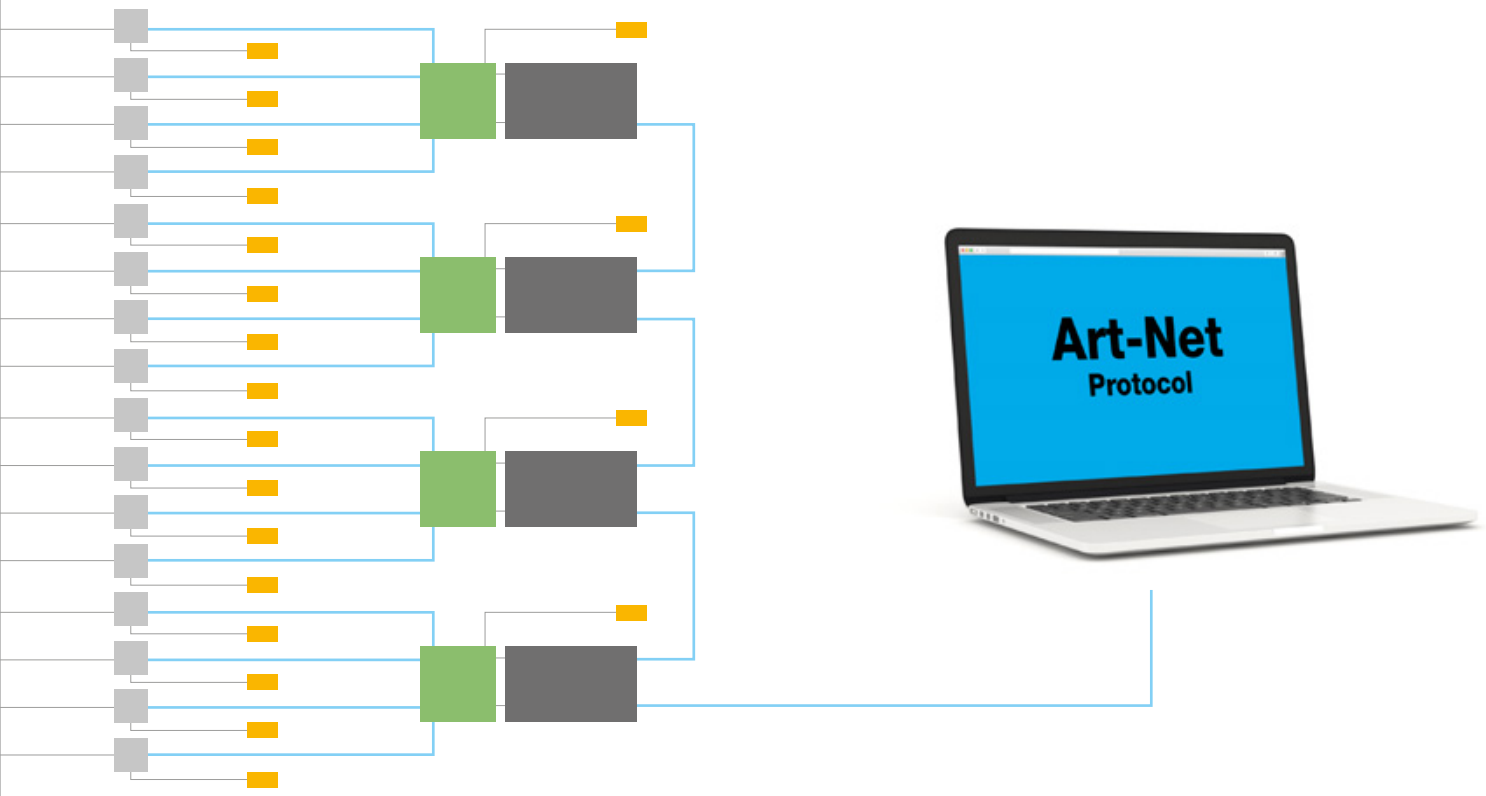

99519
Box for PIXEL electronic connection



82856
Transmitter



82853
Controller Artnet + DMX RDM





Power supply

Ethernet

For power supply/control contact Linea Light support service







L 500 mm - 6,6 W DC

	Cct	Cri		Opt
WH **80406**	RGBW	85	White 3000	Diffused

***** Two connectors for 500 mm length

L 1000 mm - 13,2 W DC

	Cct	Cri		Opt
WH **80407**	RGBW	85	White 3000	Diffused

L 5000 mm - 66 W DC

	Cct	Cri		Opt
WH **80408**	RGBW	85	White 3000	Diffused

Pag. 42 Accessories and cables

For power supply/control contact Linea Light support service

RUBBER 3D PIXEL FOLLOWS ARCHITECTURAL SHAPES OFFERING SENSATIONAL SCENOGRAPHIC EFFECTS



Click
to play the video

back to Rubber range

RUBBER 3D
RUBBER 3D RGBW



back to Rubber range

Scale 1:1

≤3 MAC ADAM CRI85

Colour temperature

With Linea Light Group, the designer has a choice of 3 colour temperatures: 2700K, 3000K and 4000K for complete design versatility. A very important factor that influences the quality if an LED source is the step of the MacAdam ellipse which is attributed to them. Linea Light Group with its LED sources has always guaranteed a ≤ 3 step, which ensures the maintenance of the light tone within a defined range and with a colour temperature that remains constant over time.



Concrete Finish


Rubber 3D with Concrete Finish astonishes, thanks to the way it integrates perfectly with the architecture. The product stands out for its cement grey finish, both in the profile and in the transmitting surface which, nevertheless, leads to absolutely no variation in the light tones. Along with high performance that is qualitatively unaltered, the finish lets Rubber blend in, camouflaging itself so that it is only noticed if it is on, thanks to the soft and clean emission. Rubber 3D Concrete Finish maintains a high grade of protection (IP67), is not adversely affected by exposure to ultraviolet rays, chlorine or saline environments and preserves its aesthetic (does not discolour) and technical (does not lose efficiency) properties over time.




Perfect RGBW blend

Thanks to RGBW technology, where the colours are combined inside the polyurethane resin layer, the individual RGBW LEDs are always high performance. The white at 3000K and the three RGB colours (red, green and blue) are combined in a single diode. This solution guarantees the best colour blend and results in an infinite variety of chromatic shades, as well as the possibility of obtaining shades of white without the influence of the RGB colours.

Rubber 3D | LED strip | 10 W/m 24 V DC





L 1000 mm - 10 W DC

	Cct	Cri	lm S - lm D	Opt
WH **80394**	2700	85	1020 - 455	Diffused
WH **80395**	3000	85	1100 - 506	Diffused
CO **82208**	3000	85	1100 - 250	Diffused
WH **80396**	4000	85	1190 - 542	Diffused

Electronics

99374	**99331**	**99332**	**83062**	**99787**
ON/OFF 75 W 210 x 48 x h 25	ON/OFF 150 W 150 x 60 x h 35	0/1-10V 150 W 150 x 60 x h 35	DALI PUSH 150 W 280 x 43 x h 30	DALI 240 W 244 x 71 x h 38

L 5000 mm - 50 W DC

	Cct	Cri	lm S - lm D	Opt
WH **80397**	2700	85	5100 - 2275	Diffused
WH **80398**	3000	85	5500 - 2528	Diffused
CO **82211**	3000	85	5500 - 1187	Diffused
WH **80399**	4000	85	5950 - 2710	Diffused

Electronics

99374	**99331**	**99332**	**83062**	**99787**
ON/OFF 75 W 210 x 48 x h 25	ON/OFF 150 W 150 x 60 x h 35	0/1-10V 150 W 150 x 60 x h 35	DALI PUSH 150 W 280 x 43 x h 30	DALI 240 W 244 x 71 x h 38

L 10000 mm - 100 W DC

	Cct	Cri	lm S - lm D	Opt
WH **80400**	2700	85	10200 - 4550	Diffused
WH **80401**	3000	85	11000 - 5055	Diffused
WH **80402**	4000	85	11900 - 5420	Diffused


Electronics


99331	**99332**	**83062**	**99787**
ON/OFF 150 W 150 x 60 x h 35	0/1-10V 150 W 150 x 60 x h 35	DALI PUSH 150 W 280 x 43 x h 30	DALI 240 W 244 x 71 x h 38

Pag. 42 Accessories and cables

RTG: 80394 - 80395 - 80396 - 80397 - 80398 - 80399 - 80400 - 80401 80402 - 82208 - 82211

Rubber 3D RGBW | LED strip | 16,5 W/m 24 V DC





L 1000 mm - 16,5 W DC

	Cct	Cri		Opt
WH **80403**	RGBW	85	White 3000	Diffused

Electronics

99696+99702	**99331**	**99278**	**DMX***	**99331**
Dimmer RF	CV 24V 150 W 150 x 60 x h 35	Dimmer DMX	DMX Controllers	CV 24V 150 W 150 x 60 x h 35

L 5000 mm - 82,5 W DC

	Cct	Cri		Opt
WH **80404**	RGBW	85	White 3000	Diffused

Electronics

99696+99702	**99331**	**99278**	**DMX***	**99331**
Dimmer RF	CV 24V 150 W 150 x 60 x h 35	Dimmer DMX	DMX Controllers	CV 24V 150 W 150 x 60 x h 35


Pag. 42 Accessories and cables

***** For power supply/control contact Linea Light support service

RTG: 80403 - 80404

Rubber 3D
Concrete finish OFF


Rubber 3D
Concrete finish ON

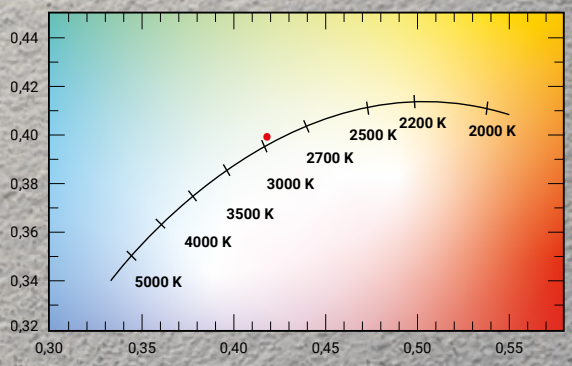

Binning Product Rubber 3D
Concrete Finish

Accessories


Linear profile



AM **99549** 1000 mm - 18 mm - 19 mm
AM **82198** 2000 mm - 18 mm - 19 mm

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW


Linear profile with cable run



AM **83034** 1000 mm - 39 mm - 19 mm
AM **82199** 2000 mm - 39 mm - 19 mm

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW


Linear profile



PVC **80418** 1000 mm - 18 mm - 19 mm
PVC **82200** 2000 mm - 18 mm - 19 mm

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW


Linear profile with cable run



PVC **80419** 1000 mm - 39 mm - 19 mm
PVC **82201** 2000 mm - 39 mm - 19 mm

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW


Clip with toothed spring



AM **99536** 50 mm - 23 mm - 21 mm

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW


Clip with toothed spring with cable run



AM **99537** 50 mm - 41 mm - 21 mm

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW


Clip



PVC **80733** 50 mm - 18 mm - 19 mm

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW


Clip with cable run



PVC **80734** 50 mm - 39 mm - 19 mm

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW

Flexible profile



ST **99541** 1045 mm - 19 mm - 16,2 mm

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW

RTG: 99541 - 99549 - 80418 - 83034 - 80419 - 99536 - 80733 - 99537 80734 - 98148 - 99520 - 89548

Accessories

Connector 2 ways



98990

suitable for: Rubber 3D (not suitable RGBW)


Double-sided tape



99520

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW

Connector



PVC **89548**

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW

RTG: 99520 - 89548

Cables

Cable with female connector



BK **99688** 2x 0,25 - 2000 mm

suitable for: Rubber 3D - Rubber 3D PIXEL RGBW

Cable with male connector



BK **99689** 2x 0,25 - 2000 mm

suitable for: Rubber 3D - Rubber 3D PIXEL RGBW

Cable with female connector RGBW



BK **99692** 5x 0,75 - 2000 mm

suitable for: Rubber 3D RGBW

Cable with male connector RGBW



BK **99693** 5x 0,75 - 2000 mm

suitable for: Rubber 3D RGBW

Cable SPI with female connector PIXEL



GR **82850** 2x 0,5 - 2000 mm

suitable for: Rubber 3D PIXEL RGBW

Cable SPI with male connector PIXEL



GR **82851** 2x 0,5 - 2000 mm

suitable for: Rubber 3D PIXEL RGBW

RTG: **99688 - 99689 - 99692 - 99693**

Accessories


Cap kits



99539

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW

Rubber preparation kit



AM **99521** 1100 mm - 40 mm - 22 mm

suitable for: Rubber 3D - Rubber 3D RGBW
Rubber 3D PIXEL RGBW

RTG: **99539 - 99521**

Electronics

Controller Artnet + SPI



BK **82852** Controller pixel 2048 channels
BK **82853** Controller pixel 4096 channels

suitable for: Rubber 3D PIXEL RGBW

PIXEL receiver Box with female SPI cable



GR **99519**

suitable for: Rubber 3D PIXEL RGBW

Transmitter



BK **82856** Max 250m


suitable for: Rubber 3D PIXEL RGBW

PIXEL transmitter Box with male SPI cable



GR **82857**

suitable for: Rubber 3D PIXEL RGBW



Cable connection with High profile



Rubber cables connection



Rubber RGBW cables connection

back to Rubber range

RUBBER 3D PROTECTION




back to Rubber range

IP68 3m

Scale 1:1


IP68 and permanent submersion

Rubber 3D PROtection is certified with a grade of IP68, therefore it lends itself well to permanent installations, submerged up to 3 metres, in environments such as pools, fountains, vertical waterfalls, modern showers and similar, at the same time guaranteeing maximum flexibility. In addition, the waterproof power cable allows protection from the water. An amazing 5 metres long, much longer than the average if we consider similar products already available on the market, the cable allows placement of the power supply unit in a separate site, helping the installer and facilitating subsequent maintenance and/or any replacements.

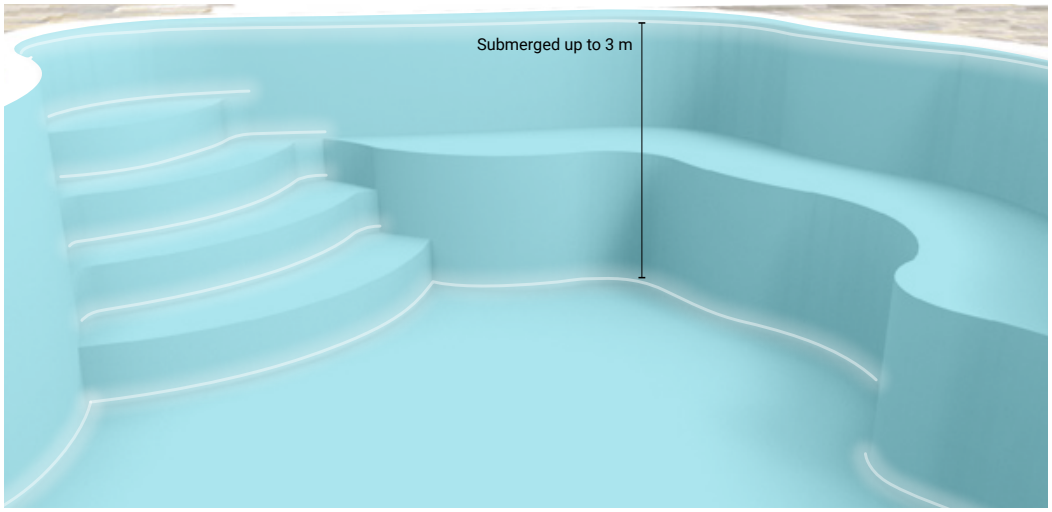


IP69


IP69 is a classification of the German DIN 40050-9 standard that extends the standard IP classification, developed for sectors where supplementary protection against high pressures and high temperatures is needed. Rubber 3D PROtection has passed the IP69 test: once installed in a pool or other environments that require periodic cleaning through the use of a pressure washer, Rubber PROtection withstands jets of high-pressure or hot water aimed directly on the product, without needing to be removed and subsequently repositioned. This is a considerable advantage that lets you avoid maintenance operations which would otherwise be compulsory and need to be repeated over time. IP69 is an additional classification that comes alongside the IP68 standard set forth by the IEC60529 system. Rubber 3D PROtection is certified for both grades of protection.

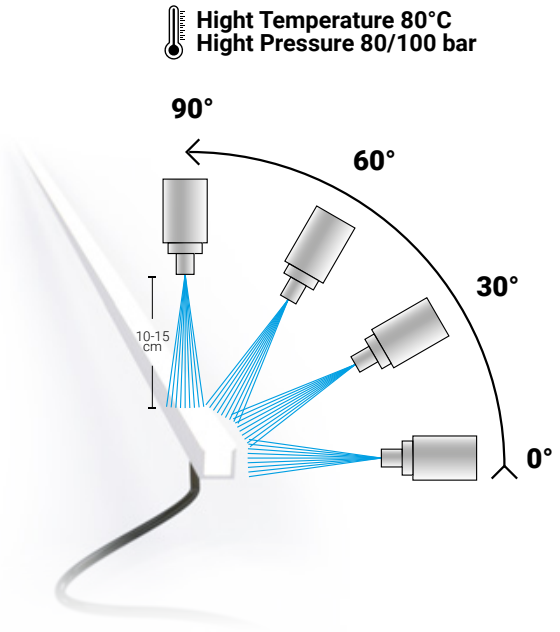

Rubber 3D PROtection | LED strip | 10 W/m 24 V DC

5 m | max 3 m





L 1000 mm - 10 W DC

	Cct	Cri	lm S - lm D	Opt
WH **80415**	2700	85	1020 - 455	Diffused
WH **80416**	3000	85	1100 - 506	Diffused
WH **80417**	4000	85	1190 - 542	Diffused

Electronics

89179	**89359**	**99331**	**83019**	**99332**	**99722**
ON/OFF 1 - 2 art. 92 x 117 x h 38	ON/OFF 1 - 4 art. 115 x 140 x h 50	ON/OFF 1 - 15 art. 150 x 60 x h 35	PUSH 1 - 15 art. 150 x 60 x h 35	0/1-10V 1 - 15 art. 150 x 60 x h 35	DALI 1 - 12 art. 191 x 63 x h 38

L 5000 mm - 50 W DC

	Cct	Cri	lm S - lm D	Opt
WH **99543**	2700	85	5100 - 2275	Diffused
WH **99544**	3000	85	5500 - 2528	Diffused
WH **99545**	4000	85	5950 - 2710	Diffused

Electronics


99331	**83019**	**99332**	**99722**	**99787**
ON/OFF 1 - 3 art. 150 x 60 x h 35	PUSH 1 - 3 art. 150 x 60 x h 35	0/1-10V 1 - 3 art. 150 x 60 x h 35	DALI 1 - 2 art. 191 x 63 x h 38	DALI 1 - 4 art. 191 x 63 x h 38


Pag. 47 Accessories and cables

RTG: 80416 - 80417 - 99544 - 99545

Rubber 3D PROtection | LED strip | 16,6 W/m 24 V DC

5 m | max 3 m





L 1000 mm - 16,6 W DC

	Cct	Cri		Opt
WH **80730**	RGBW	85	White 3000	Diffused

Electronics

99696+99702	**99331**	**99278**	**DMX***	**99331**
Dimmer RF	CV 24V 150 W 150 x 60 x h 35	Dimmer DMX	DMX Controllers	CV 24V 150 W 150 x 60 x h 35

L 5000 mm - 83 W DC

	Cct	Cri		Opt
WH **80731**	RGBW	85	White 3000	Diffused

Electronics

99696+99702	**99331**	**99278**	**DMX***	**99331**
Dimmer RF	CV 24V 150 W 150 x 60 x h 35	Dimmer DMX	DMX Controllers	CV 24V 150 W 150 x 60 x h 35


Pag. 47 Accessories and cables

***** For power supply/control contact Linea Light support service

RTG: 80730 - 80731

Accessories


Linear profile



PVC 80418 1000 mm - 18 mm - 19 mm
PVC 82200 2000 mm - 18 mm - 19 mm

suitable for: Rubber 3D PROtection


Linear profile with cable run



PVC 80419 1000 mm - 39 mm - 19 mm
PVC 82201 2000 mm - 39 mm - 19 mm

suitable for: Rubber 3D PROtection


Clip



PVC 80733 50 mm - 18 mm - 19 mm

suitable for: Rubber 3D PROtection

Clip with cable run



PVC 80734 50 mm - 39 mm - 19 mm

suitable for: Rubber 3D PROtection

RTG: 80418 - 80419 - 80733 - 80734

Accessories


Recessed casing



PVC 98148

suitable for: Rubber 3D PROtection


Double-sided tape



99520

suitable for: Rubber 3D PROtection

Connector



PVC 89548

suitable for: Rubber 3D PROtection

Connector 2 ways



98990

suitable for: Rubber 3D PROtection (not suitable RGBW)

RTG: 98148 - 99520 - 89548





Private residence | Italy



back to Rubber range

RUBBER 3D OPTICS



back to Rubber range


Rubber 3D Optics has an optics system specifically designed by the Linea Light Group R&D office to adapt to the reduced dimensions of the circuit and the stress due to the flexibility and the curvature radius. The TIR (Total Internal Reflection) optics reduce the secondary beams, increasing emission precision for an outstanding wall grazing effect. Once precision-positioned on the LED, the optics are stabilised by the cast polyurethane resin, becoming one with the adjustable body of Rubber 3D Optics.

Minimum curvature radius: 250 mm

Scale 1:1




TIR Optic

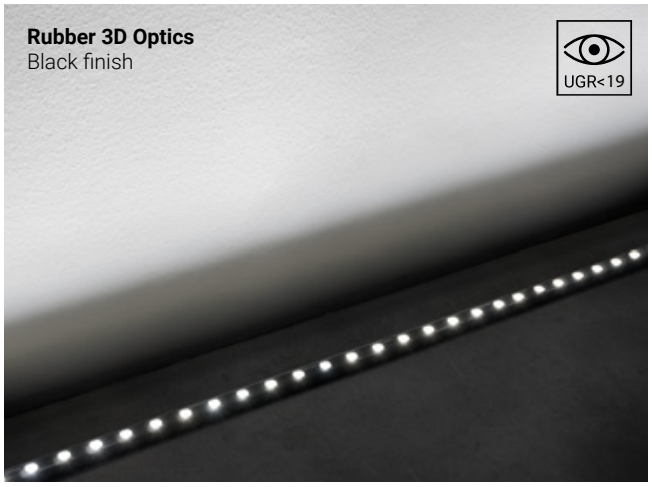



BLACK & WHITE FINISH


Available in white or black finish, colour choice is not only a question of aesthetics, but it implies differences on a light emission level as well. Rubber 3D Optics with black finish has excellent glaring control and extremely high performance emission, similar to that of a linear system, designed to obtain wall grazing effects even on significantly tall façades. Rubber 3D Optics with white finish maintains the high performance of Rubber 3D Optics with the characteristic of also being illuminated outside the optics group, thereby generating an architectural lighting effect along the entire profile.

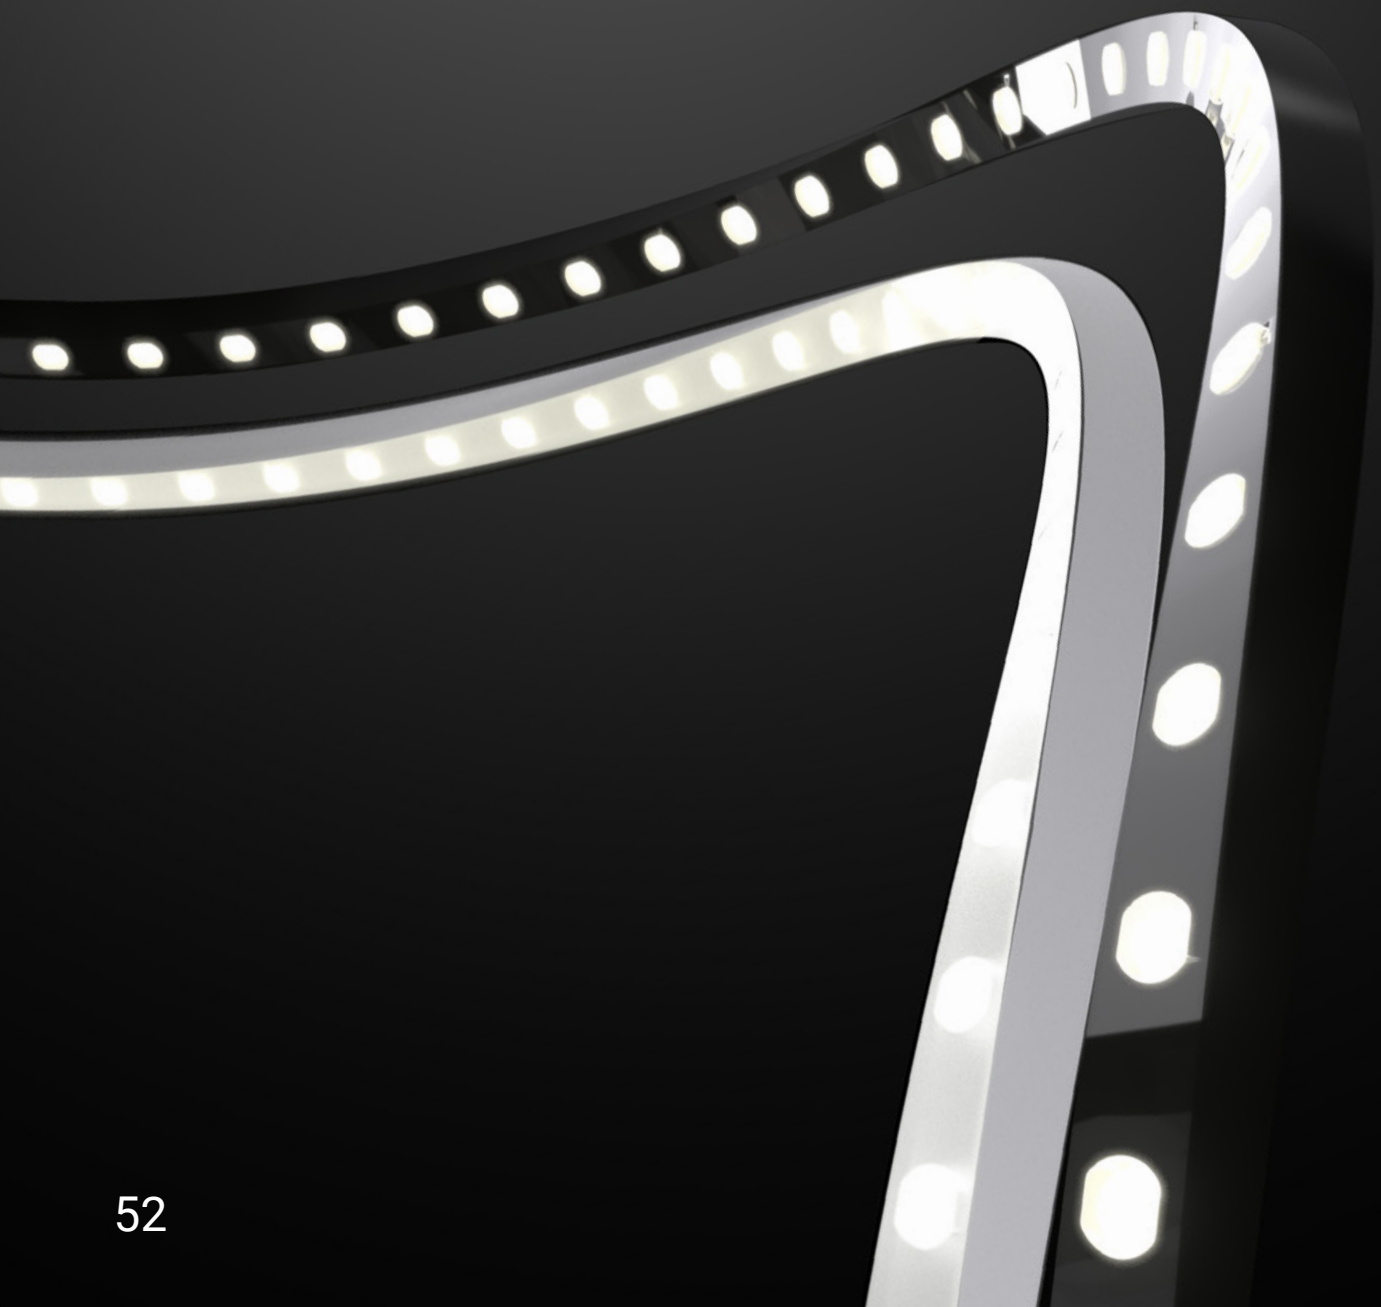



More than just an installation


1. Wall Grazing on curved wall
2. Colonnade lighting
3. Lighting of flowerbeds and parks
4. Lighting complex geometries
5. Walkway lighting
6. Cove lighting

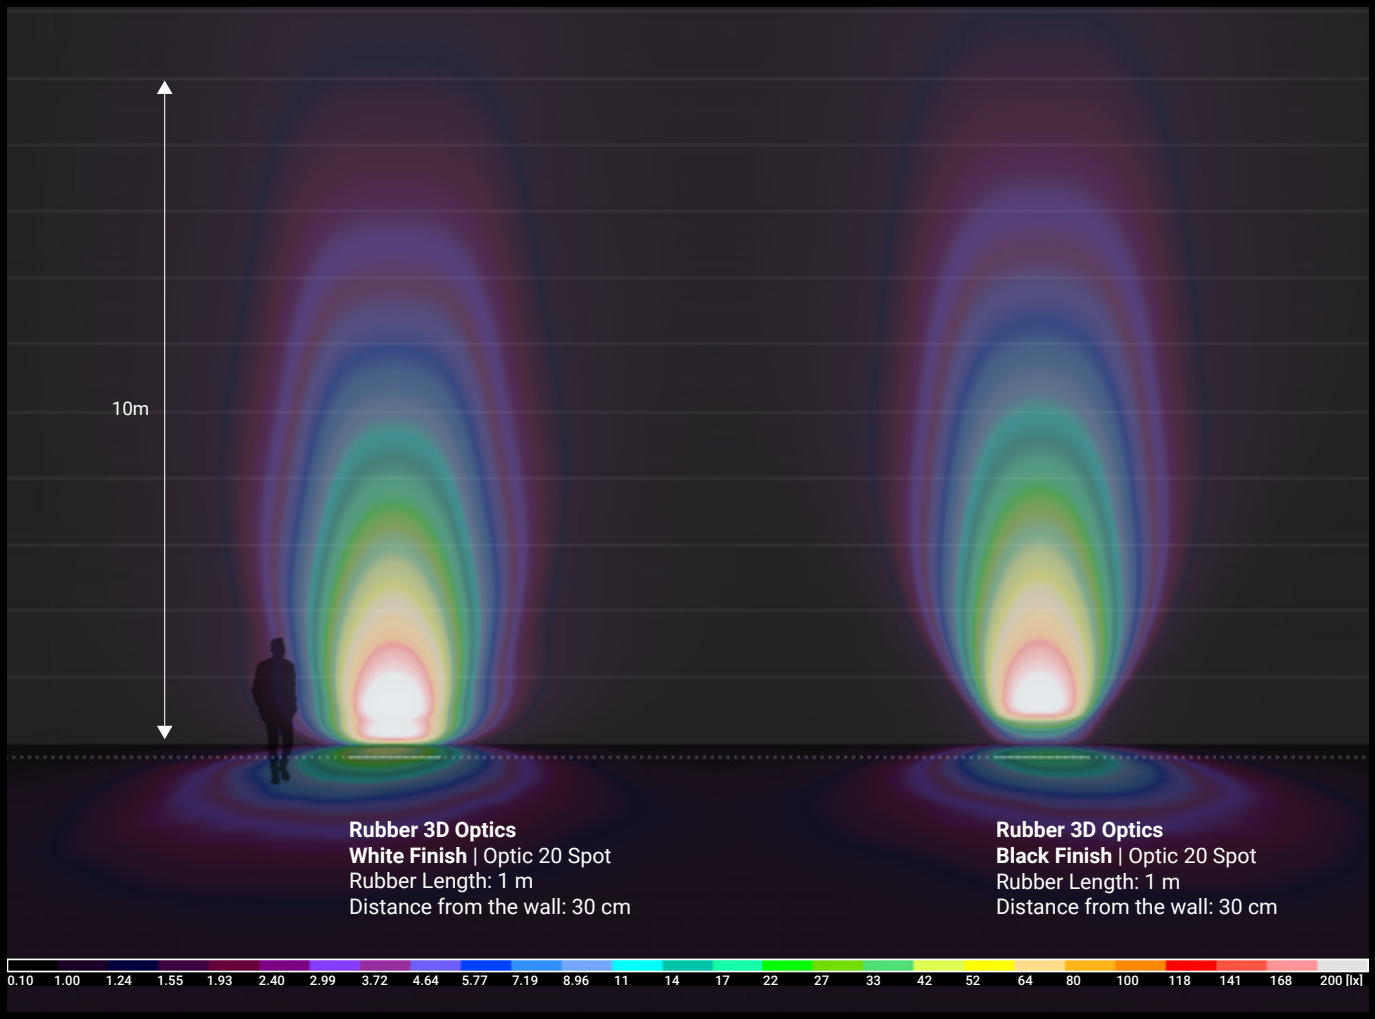

Colonnade lighting with Downlight

Product installed: Downlight | Optic 15 Spot
Installation distance: on column
Number of devices: 4
Columns diameter: 50 cm
Interdistance columns: 2 m
Wall column distance: 2.75 m


Walkway lighting:
100 lux medium

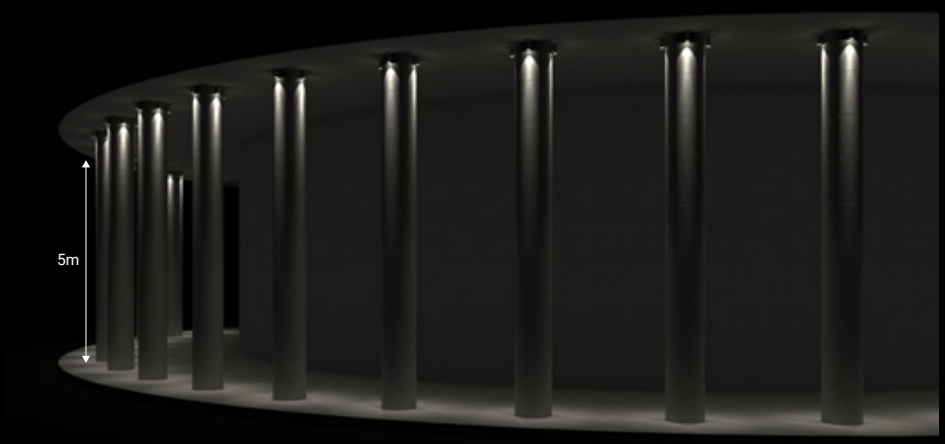


Colonnade lighting
with Rubber 3D Optics

Product installed: Rubber 3D Optics
White Finish | Optic 20 Spot
Installation distance: 10 cm
Rubber Length: 2.25 m
Columns diameter: 50 cm
Interdistance columns: 2 m
Wall column distance: 2.75 m

Walkway lighting:
200 lux medium and luminous homegeneity

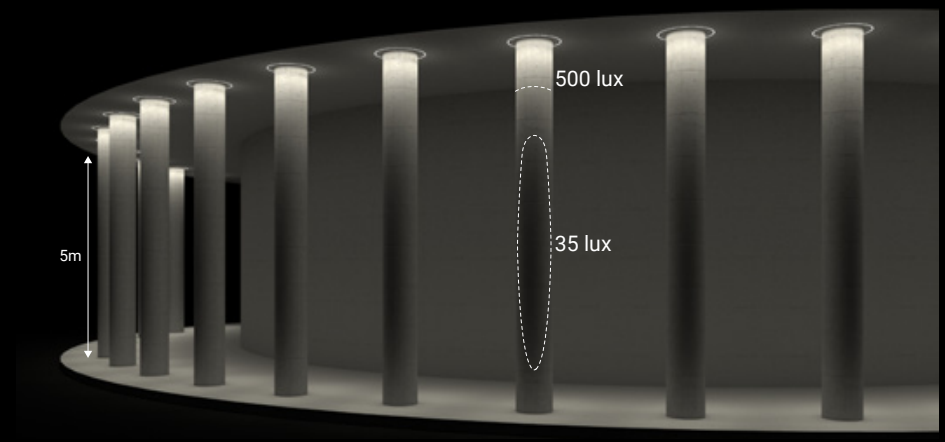


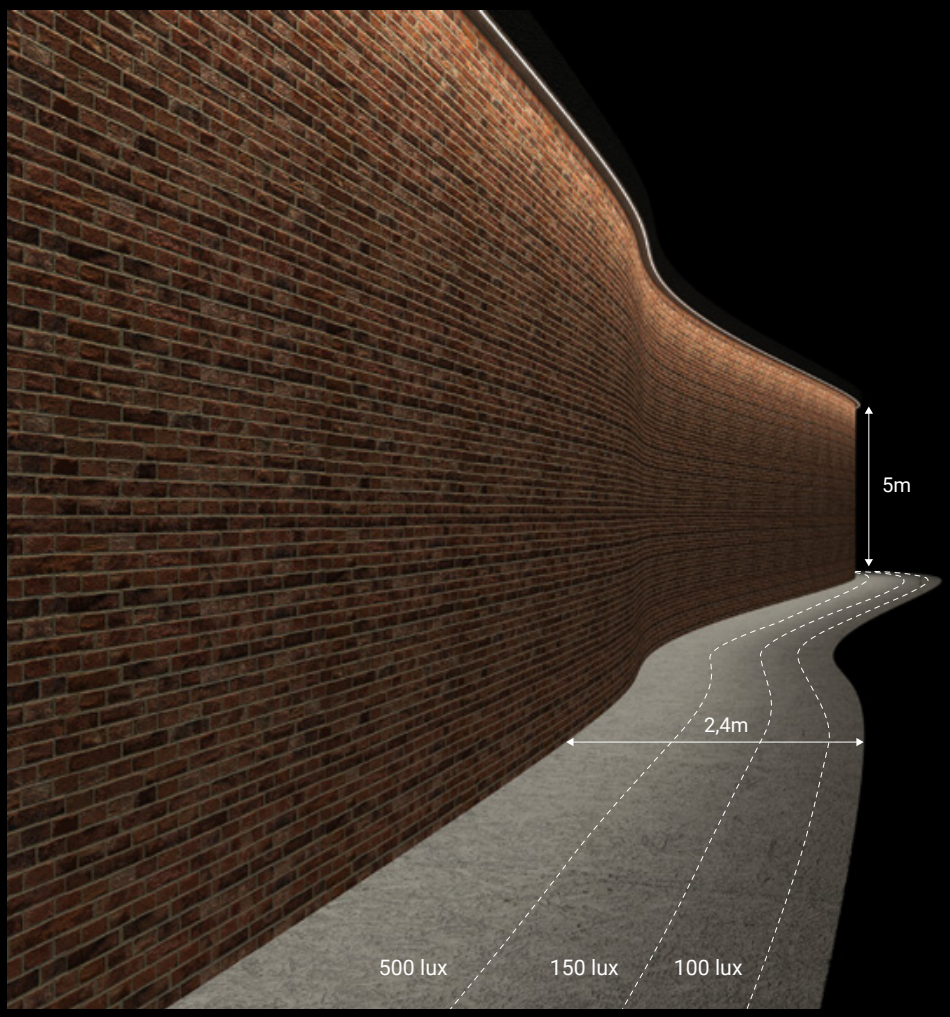

Cove Lighting

Product installed: Rubber 3D Optics
White Finish | Optic 20 Spot
Installation distance: 10 cm
Wall length: 32.5 m

Walkway lighting:
250 lux medium

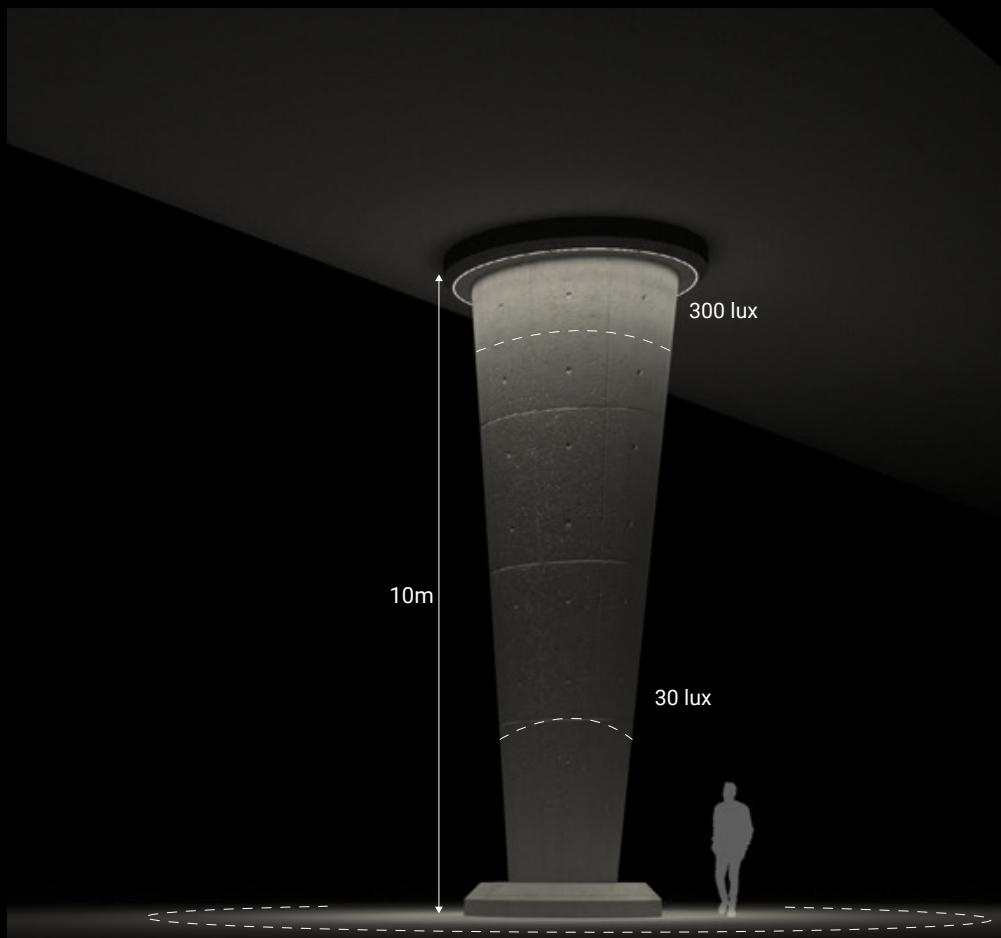



Lighting of complex geometries

Product installed: Rubber 3D Optics
White Finish | Optic 20 Spot
Installation distance: 10 cm
Rubber Length: 12.7 m
Pylon section: elliptical

Walkway lighting:
110 lux average in an area
of 4 m from the pylon

Black





L 1000 mm - 22 W DC

	Cct	Cri	lm S - lm D	Opt
WH **82216**	**M**	85	2185 - 1867	**20**
BK **82219**	**W**	85	2300 - 1965	**30**
	N	85	2415 - 2063	

Electronics

99374	99331	99332	83062	99787
ON/OFF	ON/OFF	0/1-10V	DALI PUSH	DALI
75 W	150 W	150 W	150 W	240 W
210 x 48 x h 25	150 x 60 x h 35	150 x 60 x h 35	280 x 43 x h 30	244 x 71 x h 38

L 1500 mm - 33 W DC

	Cct	Cri	lm S - lm D	Opt
WH **82217**	**M**	85	3277 - 2785	**20**
BK **82220**	**W**	85	3450 - 2931	**30**
	N	85	3622 - 3078	

Electronics

99374	99331	99332	83062	99787
ON/OFF	ON/OFF	0/1-10V	DALI PUSH	DALI
75 W	150 W	150 W	150 W	240 W
210 x 48 x h 25	150 x 60 x h 35	150 x 60 x h 35	280 x 43 x h 30	244 x 71 x h 38

L 3000 mm - 66 W DC

	Cct	Cri	lm S - lm D	Opt
WH **82218**	**M**	85	6554 - 5431	**20**
BK **82221**	**W**	85	6900 - 5716	**30**
	N	85	7244 - 6001	


Electronics

99374	99331	99332	83062	99787
ON/OFF	ON/OFF	0/1-10V	DALI PUSH	DALI
75 W	150 W	150 W	150 W	240 W
210 x 48 x h 25	150 x 60 x h 35	150 x 60 x h 35	280 x 43 x h 30	244 x 71 x h 38

Pag. 58 Accessories and cables

RTG: 82216W20 - 82216W30 - 82216N20 - 82216N30 - 82217W20 82217W30 - 82217N20 - 82217N30 - 82218W20 - 82218W30 82218N20 - 82218N30 - 82219M20- 82219M30 - 82219W20 82219W30 - 82219N20 - 82219N30 - 82220M20 - 82220M30 82220W20 - 82220W30 - 82220N20 - 82220N30 - 82221M20 82221M30 - 82221W20 - 82221W30 - 82221N20 - 82221N30


Photometric curves of Stadium 7,8W (76078)



C0/C180 C90/C270

Optic 20 Spot

Photometric curves of Stadium 7,8W (76078)




C0/C180 C90/C270

Optic 30 Flood



Accessories


Linear profile



AM **99549** 1000 mm - 18 mm - 19 mm
AM **82198** 2000 mm - 18 mm - 19 mm

suitable for: Rubber 3D Optics


Linear profile with cable run



AM **83034** 1000 mm - 39 mm - 19 mm
AM **82199** 2000 mm - 39 mm - 19 mm

suitable for: Rubber 3D Optics


Linear profile



PVC **80418** 1000 mm - 18 mm - 19 mm
PVC **82200** 2000 mm - 18 mm - 19 mm

suitable for: Rubber 3D OPTICS


Linear profile with cable run



PVC **80419** 1000 mm - 39 mm - 19 mm
PVC **82201** 2000 mm - 39 mm - 19 mm

suitable for: Rubber 3D Optics


Clip with toothed spring



AM **99536** 50 mm - 23 mm - 21 mm

suitable for: Rubber 3D Optics


Clip with toothed spring with cable run



AM **99537** 50 mm - 41 mm - 21 mm

suitable for: Rubber 3D Optics


Clip



PVC **80733** 50 mm - 18 mm - 19 mm

suitable for: Rubber 3D Optics


Clip with cable run



PVC **80734** 50 mm - 39 mm - 19 mm

suitable for: Rubber 3D Optics

Flexible profile



ST **99541** 1045 mm - 19 mm - 16,2 mm

suitable for: Rubber 3D Optics

RTG: 99541 - 99549 - 80418 - 83034 - 80419 - 99536 - 80733 - 99537 80734 - 98148 - 99520 - 89548

Accessories

Cap kits




99539

suitable for: Rubber 3D Optics

RTG: 99539 - 99521

Rubber preparation kit



AM **99521** 1100 mm - 40 mm - 22 mm

suitable for: Rubber 3D Optics

Cables

Cable with female connector



BK **99688** 2x 0,25 - 2000 mm

suitable for: Rubber 3D Optics

RTG: 99688 - 99689

Cable with male connector



BK **99689** 2x 0,25 - 2000 mm

suitable for: Rubber 3D Optics

Accessories

Connector 2 ways



98990

suitable for: Rubber 3D Optics


Double-sided tape



99520

suitable for: Rubber 3D Optics

Connector



PVC **89548**

suitable for: Rubber 3D Optics

RTG: 99520 - 89548




Cable connection with High profile



Rubber cables connection

back to Rubber range

RUBBER 2D
RUBBER 2D MINI

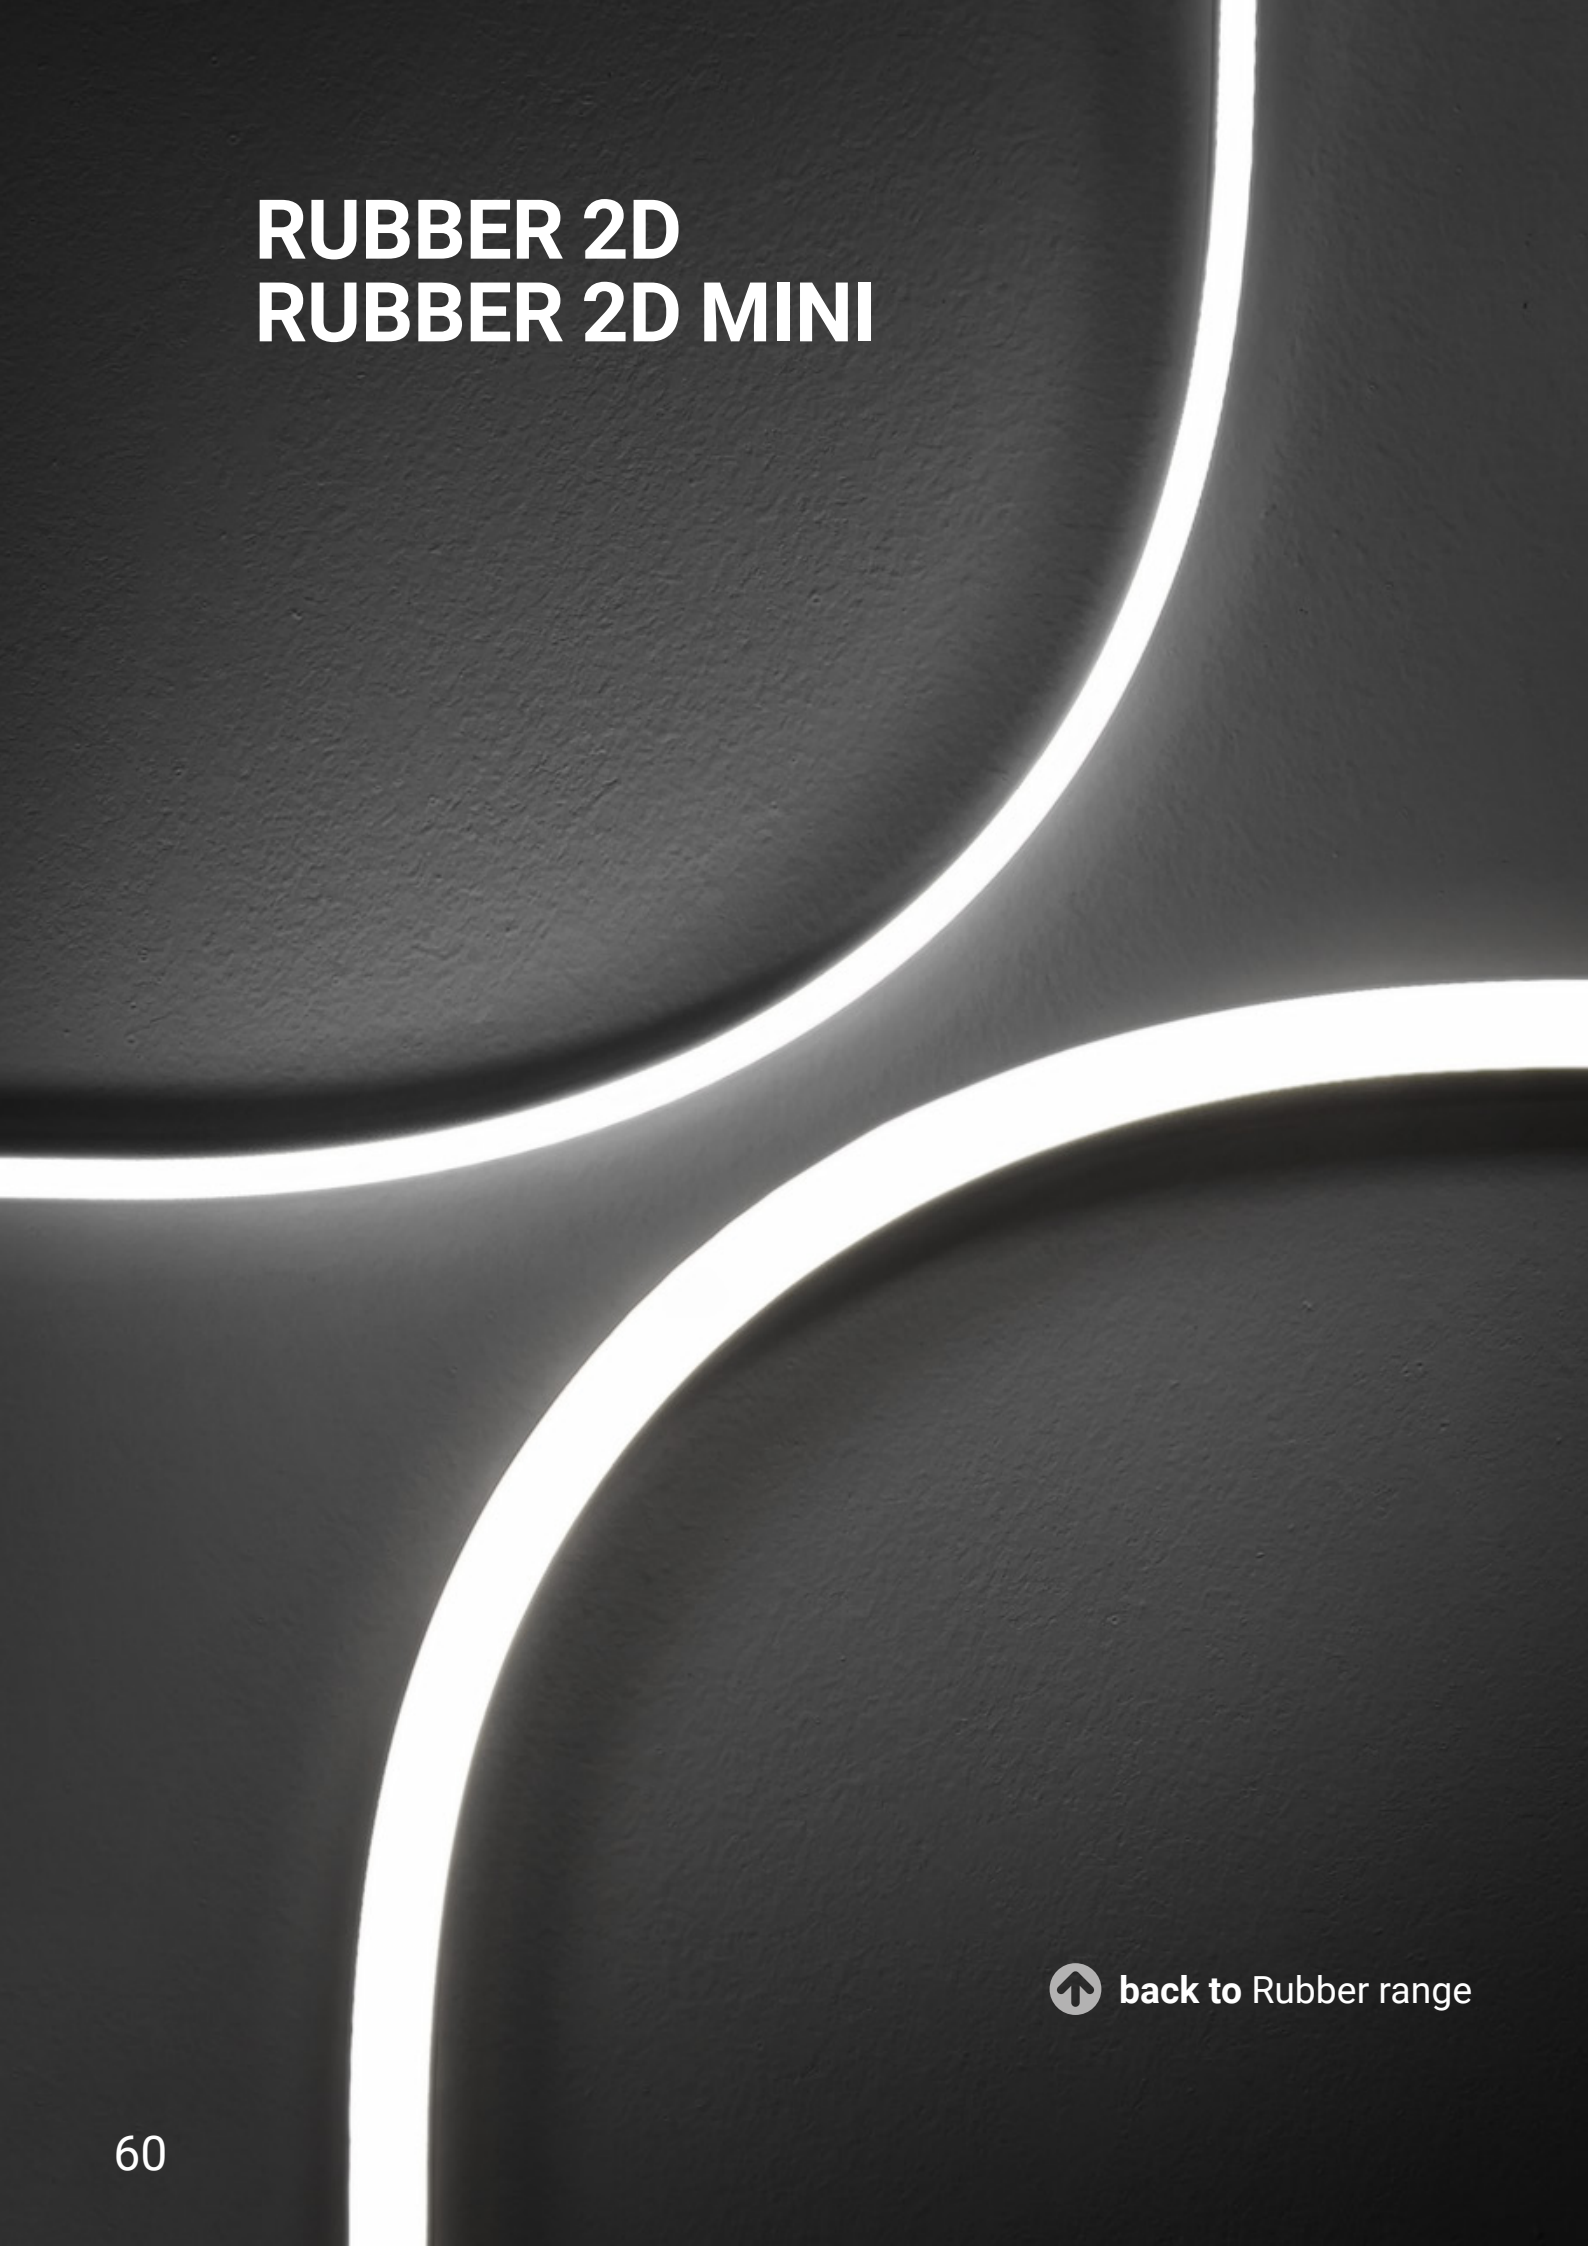

back to Rubber range

Scale 1:1

Rubber 2D

Rubber 2D and the new Rubber 2D Mini complete the Rubber family, expanding the range of choices. Rubber 2D is extremely flexible and can bend all the way to cover a very narrow radius, perfectly adapting to the sinuous profiles and following curves and reverse curves. Rubber 2D is available up to 10 metres in length maximum per single roll and can be cut every 50 mm, allowing great composition adaptability. IP67 guarantees various outdoor installation environments. Thanks to the connection with in/out cables, the light is uniform and constant along its entire length, even at the junction points.

Minimum curvature radius: 250mm


Rubber 2D_mini

Like the standard 14 mm model, the Mini version is also an ideal solution for curves and reverse curves that demand bending on a single axis, combining flexible installation with high performance. IP67 certified, it differs from any other Rubber with its extremely reduced dimensions. Rubber 2D Mini packs in just 6mm a custom designed circuit that allows extremely high performance to be achieved with very thin light for discrete and elegant linear effects. Just like the internal electronics, the accessories, clips and profiles are also specifically designed for the minimum bulk of the strip.

Minimum curvature radius: 150 mm



Sancta sanctorum | Biella, Italy

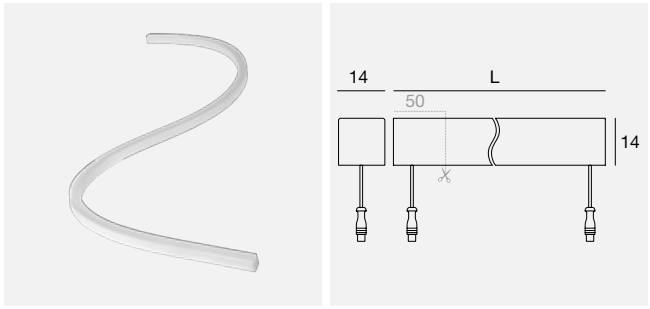

L 1000 mm - 10 W DC

	Cct	Cri	lm S - lm D	Opt
WH **80409**	2700	85	1060 - 437	Diffused
WH **80410**	3000	85	1145 - 472	Diffused
WH **80411**	4000	85	1236 - 509	Diffused

Electronics

99374	99331	99332	83062	99787
ON/OFF 75 W 210 x 48 x h 25	ON/OFF 150 W 150 x 60 x h 35	0/1-10V 150 W 150 x 60 x h 35	DALI PUSH 150 W 280 x 43 x h 30	DALI 240 W 244 x 71 x h 38

L 5000 mm - 50 W DC

	Cct	Cri	lm S - lm D	Opt
WH **80412**	2700	85	5300 - 2185	Diffused
WH **80413**	3000	85	5725 - 2360	Diffused
WH **80414**	4000	85	6180 - 2545	Diffused

Electronics

99374	99331	99332	83062	99787
ON/OFF 75 W 210 x 48 x h 25	ON/OFF 150 W 150 x 60 x h 35	0/1-10V 150 W 150 x 60 x h 35	DALI PUSH 150 W 280 x 43 x h 30	DALI 240 W 244 x 71 x h 38

L 10000 mm - 100 W DC


	Cct	Cri	lm S - lm D	Opt
WH **80391**	2700	85	10600 - 4370	Diffused
WH **80392**	3000	85	11450 - 4720	Diffused
WH **80393**	4000	85	12360 - 5090	Diffused

Electronics

99331	99332	83062	99787
ON/OFF 150 W 150 x 60 x h 35	0/1-10V 150 W 150 x 60 x h 35	DALI PUSH 150 W 280 x 43 x h 30	DALI 240 W 244 x 71 x h 38

Pag. 66 Accessories and cables

RTG: **80409 - 80410 - 80411 - 80412 - 80413 80414 - 80391 - 80392 - 80393**

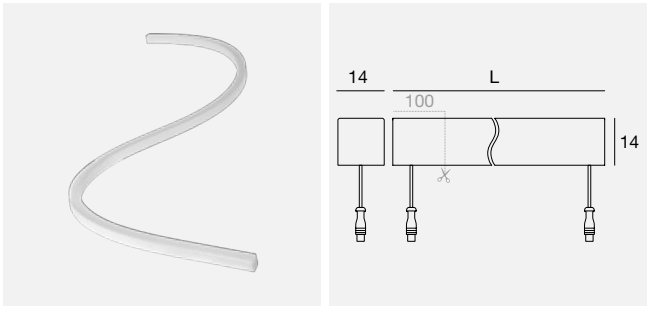

L 1000 mm - 10 W DC

	Cct	Cri	lm S - lm D	Opt
WH **82135**	2700	85	1060 - 411	Diffused
WH **82136**	3000	85	1145 - 444	Diffused
WH **82137**	4000	85	1236 - 479	Diffused

Electronics

99784	99785	83179	Switching	83177
ON/OFF 150W CV 48V	ON/OFF 240W CV 48V	DALI 150W CV 48V	Switching CV 48V	Dimmer DMX 312W

L 5000 mm - 50 W DC

	Cct	Cri	lm S - lm D	Opt
WH **82138**	2700	85	5300 - 2055	Diffused
WH **82139**	3000	85	5725 - 2220	Diffused
WH **82140**	4000	85	6180 - 2395	Diffused

Electronics

99784	99785	83179	Switching	83177
ON/OFF 150W CV 48V	ON/OFF 240W CV 48V	DALI 150W CV 48V	Switching CV 48V	Dimmer DMX 312W

L 10000 mm - 100 W DC

	Cct	Cri	lm S - lm D	Opt
WH **82141**	2700	85	10600 - 4110	Diffused
WH **82142**	3000	85	11450 - 4440	Diffused
WH **82143**	4000	85	12360 - 4790	Diffused

Electronics


99784	99785	83179	Switching	83177
ON/OFF 150W CV 48V	ON/OFF 240W CV 48V	DALI 150W CV 48V	Switching CV 48V	Dimmer DMX 312W

Pag. 66 Accessories and cables

RTG: **82135 - 82136 - 82137 - 82138 - 82139 82140 - 82141 - 82142 - 82143**

48V

The main characteristic that Linea Light Group introduces through the Rubber 2D 48V units is the ability to increase the usable section even on projects where significant lengths are foreseen. Thereby simplifying planning and installation.

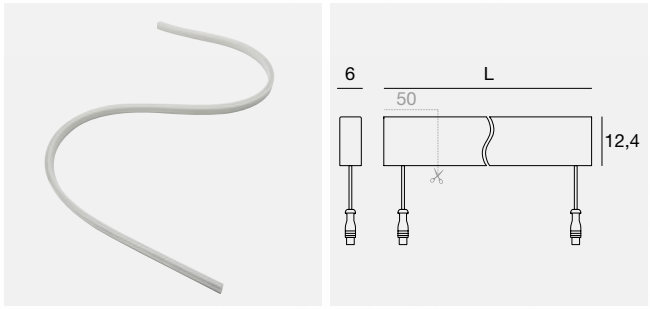

L 1000 mm - 5 W DC

	Cct	Cri	lm S - lm D	Opt
WH **82147**	2700	85	510 - 129	Diffused
WH **82148**	3000	85	550 - 140	Diffused
WH **82149**	4000	85	595 - 151	Diffused

Electronics

99374	**99331**	**99332**	**83062**	**99787**
ON/OFF 75 W 210 x 48 x h 25	ON/OFF 150 W 150 x 60 x h 35	0/1-10V 150 W 150 x 60 x h 35	DALI PUSH 150 W 280 x 43 x h 30	DALI 240 W 244 x 71 x h 38

L 5000 mm - 25 W DC

	Cct	Cri	lm S - lm D	Opt
WH **82150**	2700	85	2550 - 645	Diffused
WH **82151**	3000	85	2750 - 700	Diffused
WH **82152**	4000	85	2975 - 755	Diffused

Electronics

99374	**99331**	**99332**	**83062**	**99787**
ON/OFF 75 W 210 x 48 x h 25	ON/OFF 150 W 150 x 60 x h 35	0/1-10V 150 W 150 x 60 x h 35	DALI PUSH 150 W 280 x 43 x h 30	DALI 240 W 244 x 71 x h 38

L 10000 mm - 50 W DC

	Cct	Cri	lm S - lm D	Opt
WH **82153**	2700	85	5100 - 1290	Diffused
WH **82154**	3000	85	5500 - 1400	Diffused
WH **82155**	4000	85	5950 - 1510	Diffused

Electronics

99374	**99331**	**99332**	**83062**	**99787**
ON/OFF 75 W 210 x 48 x h 25	ON/OFF 150 W 150 x 60 x h 35	0/1-10V 150 W 150 x 60 x h 35	DALI PUSH 150 W 280 x 43 x h 30	DALI 240 W 244 x 71 x h 38

Pag. 66 Accessories and cables

RTG: 82147 - 82148 - 82149 - 82150 - 82151 82152 - 82153 - 82154 - 82155




Rubber 2D_mini



Accessories


Linear profile



AM **99549** 1000 mm - 18 mm - 19 mm
AM **82198** 2000 mm - 18 mm - 19 mm

suitable for: Rubber 2D


Linear profile with cable run



AM **83034** 1000 mm - 39 mm - 19 mm
AM **82199** 2000 mm - 39 mm - 19 mm

suitable for: Rubber 2D


Linear profile



PVC **80418** 1000 mm - 18 mm - 19 mm
PVC **82200** 2000 mm - 18 mm - 19 mm

suitable for: Rubber 2D


Linear profile with cable run



PVC **80419** 1000 mm - 39 mm - 19 mm
PVC **82201** 2000 mm - 39 mm - 19 mm

suitable for: Rubber 2D


Linear profile



AM **82846** 1000 mm - 20 mm - 10 mm
AM **82202** 2000 mm - 20 mm - 10 mm

suitable for: Rubber 2D Mini


Clip with toothed spring



AM **99536** 50 mm - 23 mm - 21 mm

suitable for: Rubber 2D


Clip with toothed spring with cable run



AM **99537** 50 mm - 41 mm - 21 mm

suitable for: Rubber 2D


Clip



PVC **80733** 50 mm - 18 mm - 19 mm

suitable for: Rubber 2D


Clip with cable run



PVC **80734** 50 mm - 39 mm - 19 mm

suitable for: Rubber 2D


Clip with toothed spring



AM **82847** 50 mm - 20 mm - 10 mm

suitable for: Rubber 2D Mini

Flexible profile



ST **99541** 1045 mm - 19 mm - 16,2 mm

suitable for: Rubber 2D

RTG: 99549 - 80418 - 83034 - 80419 - 82846 - 99541 - 99536 - 80733 99537 - 80734 - 82847

Accessories

Cap kits



99539

suitable for: Rubber 2D

Cap kits




99538

suitable for: Rubber 2D Mini

RTG: 99538 - 99539 - 99521

Rubber preparation kit



AM 99521 1100 mm - 40 mm - 22 mm

suitable for: Rubber 2D

Cables

Cable with female connector



BK 99688 2x 0,25 - 2000 mm

suitable for: Rubber 2D - Rubber 2D Mini

RTG: 99688 - 99689

Cable with male connector




BK 99689 2x 0,25 - 2000 mm

suitable for: Rubber 2D - Rubber 2D Mini

Accessories

Connector



PVC 89548

suitable for: Rubber 2D - Rubber 2D Mini

RTG: 89548



Cable connection with High profile



Rubber cables connection

back to Rubber range


how to read symbols & suffixes

- Indoor installation
- Outdoor installation
- Wall mounting
- Ground mounting
- Ceiling mounting
- Wall or ground mounting
- Ceiling or wall mounting
- Ceiling, wall or groung mounting
- Ceiling or ground mounting
- IP-- Protection index (IEC 60529) against foreign bodies and water
- IP68 Product designed to withstand temporary immersions
- IP-- / IP-- Optical compartment protecion index
- IK-- Protection index (IEC 62262) against external mechanical impacts
- Walkable device
- Carriageable device
- Stainless steel
- Article protected by resin
- Circular installation hole
- Square installation hole
- Directional light beam
- Tilting light beam
- EM Emergency version available
- Power supply cable included
- Device suitable to be mounted on furniture
- F Device suitable to be mounted on normally flammable surfaces (EN 60598)
- P Device with built-in thermal protection
- Driver included
- Driver not included
- Class I - IEC protection class
- Class II - IEC protection class
- III Class III - IEC protection class
- T3 Over Voltage Protection
- Smartwave ™
- C.C. Constant Current
- C.V. Constant Voltage
- Dimming with integrated potentiometer
- Simply DIM
- Phase-cut
- 1-10 V
- DALI Digital Addressable Lighting Interface
- DALI 2 Digital Addressable Lighting Interface
- DALI PUSH Digital Addressable Lighting Interface
- DMX 512 DMX 512
- DMX RDM RDM, DMX 512
- Infrared
- Radio frequency remote control
- P.I.R. Sensor
- Power Supply With Safety Transformer
- Independent Power Supply
- 100 Thermally Protected Power Supply
- Reinforced insulation
- UGR Unified Glare Rating
- Motion sensor
- Integrated antenna
- External Antenna
- The power supply does not switch into the installation hole
- PTP DALI PointToPoint DALI Dimmering on single item

All articles belong to energy class A++. The connection diagrams for electronics articles are included in the technical documentation.

_A	Alluminium
_A (Orma)	Round
_AB	Alluminium Blade
_AJ	Alluminium Adjustable
_AL	Alluminium Opaline
_AM	Alluminium Adjustable
_C	Ceiling
_CD	Ceiling Direct
_Cell_C	Cell Ceiling
_Cell_P	Cell Pendant
_CI	Ceiling Internal
_D	Double
_EX	Extactable
_F	Frameless
_FJ	Frameless Adjustable
_FL	Frameless Opaline
_FO	Frameless Concentrica
_I	Inox
_IB	Inox Blade
_IJ	Inox Adjustable
_IL	Inox Opaline
_IM	Inox Moon
_M	Modular
_P	Pendant
_PD	Pendant direct
_PI	Pendant Internal
_PU	Pendant Up
_Q	Square
_QD	Square Double
_QJ	Square Adjustable
_QV	Square vertical
_R	Round
_R PRO	Round Professional
_RD (LV44)	Round Dynamic White
_RDX	Round Double + Screws
_RF	Round Frameless
_RFJ	Round Frameless Adjustable
_RJ	Round Adjustable
_RP (Nautilus)	Round Projectors
_RX	Round Big
_RX (Suelo)	Round + Screws
_RX PRO (Suelo)	Pound + Screws Professional
_RXJ (Suelo)	Round + Screws + Adjstable
_RY	Round Asymmetric
_S	Surface
_T	Track
_W	Wall
_WF	Wall Frameless
_Ww	Wall Washer
_X (Anton)	Big
_X (Paseo)	PowerLED
_Y	Asymmetric

finishes materials



White



Concrete



Black

For any further information, please check current i-LèD Professional catalogue

The drawings, the measurements, the materials and the colours in this catalogue are understood to be indicative. In the interest of the clientele, the company reserves the right to modify the models at any time and without any obligation of advance notice.

The indication of the Italian flag in this catalogue is purely indicative. The products could be of origins other than those indicated.

"Linea Light Group" reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information in the catalogue are binding for **"Linea Light Group"**. **"Linea Light Group"** will not be held liable for any illustration, text and/or translation errors. More product characteristics are contained in the relative technical data sheets and instruction sheets. This catalogue is protected by copyright (law 22/04/1941 No. 633 and law 14/12/1942 No. 1485: this prohibits any reproduction, total or even partial).
All values indicated in the catalogue are measured values. There is a +/- 10% tolerance for the flow, CCT and power data.

Addresses

Linea Light HQ Italy
via della Fornace, 59 z.i.
31023 Castelminio di Resana (TV) - Italy
Phone: +39 0423 7868
Fax: +39 0423 786900
info@linealight.com

Linea Light Milano
via Morimondo, 26 int. 17G
20143 Milano - Italy
Phone: +39 02 36750915
Fax: +39 02 36750915
milano@linealight.com

Linea Light Roma
Via La Spezia, 34
00182 Roma - Italy
Phone: +39 06 68589134
info@linealightroma.com

Linea Light UK
Suite 109 - The Business Design Centre
52 Upper Street - Islington N10QH
London - UK
Phone: +44 0203 6371983
info@linealight-uk.com

Linea Light France
Z.A. Heiden Est, 12 rue des Pays-Bas
68310 Wittelsheim - France
Phone: +33 389 75 52 23
Fax: +33 389 75 59 07
info@linealight.fr

Linea Light Deutschland
Aktienstraße 214
45473 Mülheim Ruhr - Germany
Phone: +49 208 299979-0
Fax: +49 208 299979-10
service@linealight.de

Linea Light USA - Inter Lux
3741 Commerce Drive
Suites 306-308
Baltimore, MD 21227 - USA
Phone: +1 410 381 1497
Fax: +1 410 381 1589
answers@inter-lux.com

Linea Light Russia
Design Center Artplay
Nizhnyaya Syromyatnicheskaya 10/2 enter B,
3rd floor, office 14
105120 Moscow - Russia Federation
Phone: +7 495 639 9941
info@linealight.ru

Linea Light Spain
C/ Longares, 48
28022 Madrid - Spain
Phone: +34 912534773
gestion@linealight.com

Linea Light Singapore
21 Kaki Bukit Place, 5th Fl.
Eunos Techpark Singapore
416199 Singapore
Phone: +65-6908 5758
info.sg@linealight.com

Linea Light GCC
Jumeirah Lake Towers
JBC2 - 35th Floor Cluster V - Dubai - UAE
P.O. Box 125902
Phone: +971 4 4218275
Fax: +971 4 4218274
info@linealight.ae

Linea Light Asia - Pacific
No. 7, Nanyi Huayuan Road, Industry Avenue,
528478 Xiaolan Town, Zhongshan City,
Guangdong Province - China
Phone: +86 760 87618355
info@linealight.com.cn



